04. CSS

Justina Balsė



04. CSS

- Fono parametrai
- CSS Reset ir CSS normalize
- CSS Naming Conventions

Justina Balsė



Fono savybės (+default reikšmės)

- **background-image**: none;
- **background-color**: transperant;
- **background-repeat**: repeat;
- **background-position**: 0% 0%;
- **background-size**: auto;
- **background-clip**: border-box;
- **background-attachment**: scroll;
- **background-origin**: padding-box;

Fono parametrai

```
section{
    background-color: green;
}

header{
    background-color: rgba(255, 255, 128, .5);
}

main{
    background-color: hsl(50, 33%, 25%);
}
```

Fono parametrai

```
.fonas-1{
    background-image: url("../../media/examples/lizard.png");
}

.fonas-2{
    background-image: url("../../media/examples/lizard.png"),
                      url("../../media/examples/star.png");
}
```





Fono parametrai

- `background-image:`
  - `linear-gradient;`
  - `radial-gradient;`



Fono parametrai

```
.fono-dydis-auto{
    background-size: auto;
}
.fono-dydis-cover{
    background-size: cover;
}
.fono-dydis-contain{
    background-size: contain;
}
```

Fono parametrai

```
.fono-karpymas{
    background-clip: border-box;
}

.fono-karpymas{
    background-clip: padding-box;
}
```






Fono parametrai

```
.fono-karpymas{
    background-clip: content-box;
}



.fono-karpymas {
    background-clip: text;
    color: transparent;
}
```



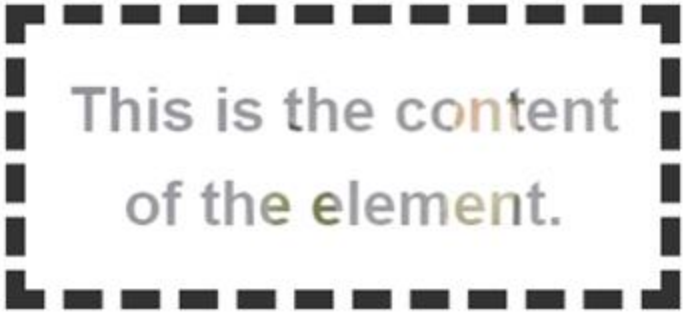

Fono parametrai

- `background-repeat:`
  - repeat;
  - no-repeat;
  - repeat-x;
  - repeat-y;
  - space;
  - round;




Fono parametrai

- background-attachment:
  - fixed – slenkant puslapiu žemyn, paveikslėlis vizualiai lieka toje pačioje vietoje;
  - scroll (numatytoji) – slenkant puslapiu žemyn, paveikslėlis fiziškai išlieka toje pačioje vietoje;


Fono parametrai

- `background-position:`
  - 1 reikšmė: center, top, left, bottom, right;
  - 2 reikšmės X ir Y: center, top, left, bottom, right;
- Reikšmės:
  - 100px 5px
  - 100% 5%
  - top right
  - bottom 10px right 20px

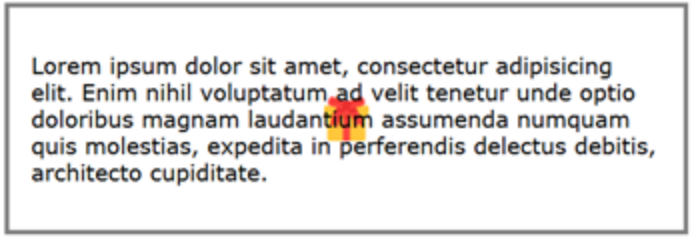

Fono parametrai

```
background-image:
   url(giftbox.png), url(giftbox.png);
background-size:
   auto, auto;
background-repeat:
   repeat-x, no-repeat;
background-position:
   left top, right bottom;
```

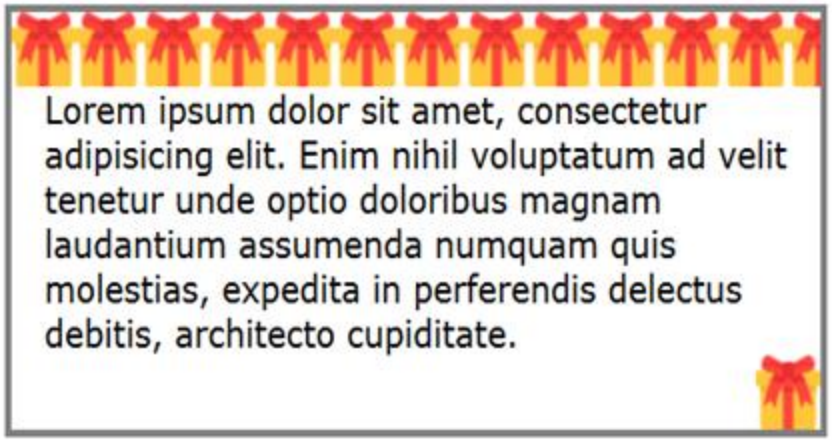

Fono parametrai: shorthand

```
section {
background-color: #000;
background-image: url(images/bg.gif);
background-repeat: no-repeat;
background-position: left top;
}
```

```
section{
background: #000
    url(images/bg.gif)
    no-repeat
    left top;
}
```

Priešdėliai | background

```
section {
/* Safari 4-5, Chrome 1-9 */
background: -webkit-gradient(linear, left top, left bottom, color-stop(0%, #000), color-stop(100%, #fff));
/* Safari 5.1, Chrome 10+ */
background: -webkit-linear-gradient(top, #000 0%, #fff 100%);
/* Firefox 3.6+ */
background: -moz-linear-gradient(top, #000 0%, #fff 100%);
/* IE 6 - 9 */
filter: progid:DXImageTransform.Microsoft.gradient( startColorstr='#000000', endColorstr='#ffffff', GradientType=0);
/* IE 10+ */
background: -ms-linear-gradient(top, #000 0%, #fff 100%);
/* Opera 11.10+ */
background: -o-linear-gradient(top, #000 0%, #fff 100%);
}
```




Bėda



HTML, CSS tokie patys, tačiau naršyklėse rezultatas skiriasi.

CSS reset

- Visos naršyklės turi tam tikrus numatytuosius (default) stilius, kurie automatiškai pritaikomi dažniausiai naudojamiems svetainės elementams. Reset stiliaus failai (reset stylesheets) naudojami tam, kad būtų panaikinti naršyklės numatytieji stiliai.
  Reset CSS yra svarbus, jei norite kurti švarią ir pilnai kontroliuojamą svetainę.



CSS reset vs. Normalize

- HTML5 Reset Stylesheet
- A **CSS Reset** is a short, often compressed (minified) set of CSS rules that *resets* the styling of all HTML elements to a consistent baseline.

- Normalize.css
- When an element has different default styles in different browsers, **normalize.css** aims to make those styles consistent and in line with modern standards when possible.

CSS Naming Conventions

```css
.redBox {
  border: 1px solid red;
}
```

```css
.red-box {
  border: 1px solid red;
}
```

CSS pavadinimų rašymo taisyklės



Yra 3 problemos, kurias CSS pavadinimų (naming) konvencijos bando išspręsti:

- Suprasti, **ką selektorius daro**, vien tik pažiūrėjus į jo pavadinimą
- Suprasti, **kur selektorius gali būti naudojamas**, vien tik pažiūrėjus į jį
- Suprasti **ryšius tarp klasių pavadinimų**, vien tik pažiūrėjus į juos



CSS Naming Conventions

```css
/* Parent-Child relationships */
.post {
  margin: 2em 0;
}
.post-title {
  font-size: 2em;
  font-weight: normal;
}
```


```css
/* Plural Parent Pattern */
.tabs {
  border-bottom: 1px solid silver;
  text-align: center;
}

.tab {
  background: #e5e5e5;
  border: 1px solid silver;
  color: #666;
}
```





BEM | 1

BEM is a convention maintained to help you organize your code and reduce the overall CSS footprint. This, in turn, results in greater efficiency across the board.

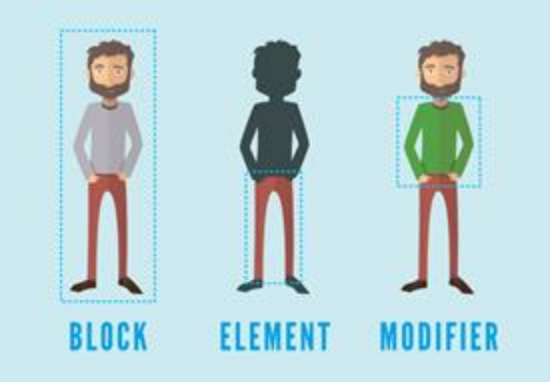

	Description	Examples
Block	Standalone entity that is meaningful on its own. Is a big component generally within a block component you can find elements and modifiers.	• header • container • menu • checkbox
Element	A part of a block that has no standalone meaning and is semantically tied to its block.	• menu item • list item • header title • checkbox item
Modifier	A flag on a block or element. Use them to change appearance or behavior.	• disabled • color green • highlighted • checked

BEM | 3

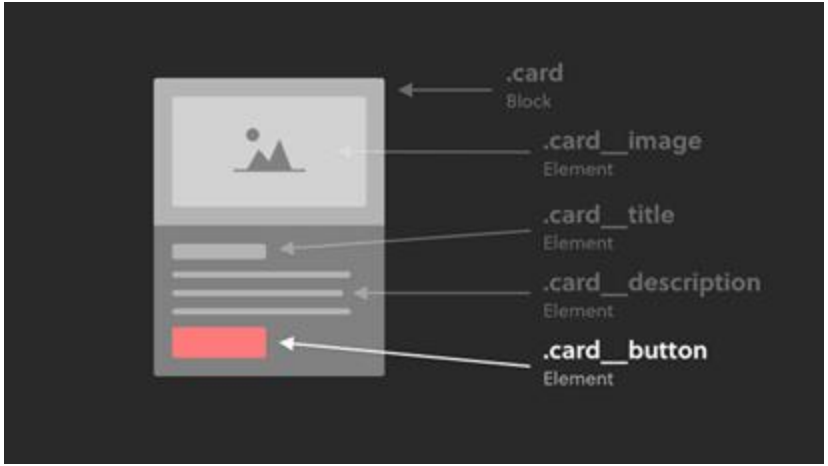


```
<div class=”card”>
   <img class=“card__image”>
   <h2 class=“card__title”>I am a card</h2>
   <p class=“card__description”>I am the card
paragraph</p>
<!-- The button is an element inside the block -->
    <a class=“card__button”>Learn more</a>
</div>
```


BEM | 4



- Pavyzdys

Lietuvos webo profesionalai

Pries 3 metus, dar kai tik pradejau mokytis programuot, dariau saita, dbr po triju metu atsibudo klientas ir paprase korekciju. Paziurejau i koda, prajuokino failu ir klasiu pavadinimai 😀 pagalvojau gal dar kam nors pakels nuotaika 😀

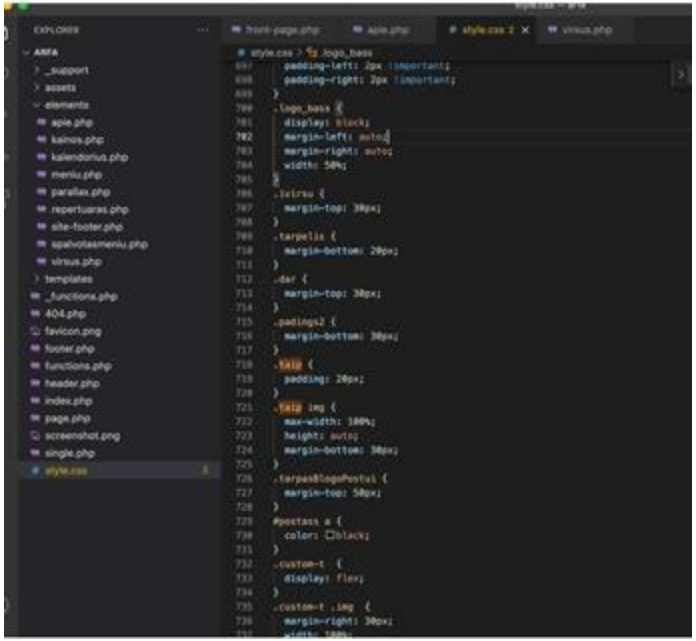

```
frontend > src > Puslapiai > Pajamos > # Pajamos_dizainas.css > ...
*{
    box-sizing: border-box;
}
.main_back{
    padding: 20px;
    max-width: calc(100% - 250px);
    margin-top: 105px;
    margin-left: 250px;
}

.h3-text{
    margin-left: 35px;
}

.container_pajamos{
    background-color: var(--white-color);
    padding: 10px;
    margin: 10px;
    border-radius: 5px;
    color: var(--dark-color);
}

.container_pajamos h3{
    font-weight: 500;
}

.block_pajamos{
    display: flex;
    margin-left: 60px;
    align-items: center;
}

.block_pajamo{
    background: var(--grey-color);
    padding: 15px 20px;
    border-radius: 8px;
    margin: 15px 40px 0 0px;
```

Justina Balsė

Naudingos nuorodos

- CSS BEM
- CSS BEM 2
- CSS BEM CHEAT SHEET

Praktika (1)

- Įterpti tris nuotraukas viename bloke.
- Nuotraukų šaltiniai:
  - https://www.freepik.com/
- Daugiau pvz.:
  - https://www.w3schools.com/css/tryit.asp?filename=trycss3_background_multiple
  - https://developer.mozilla.org/en-US/docs/Web/CSS/CSS_backgrounds_and_borders/Using_multiple_backgrounds



2024 V-H grupės darbų galerija

















Justina Balsė

Praktika (2)

- Sukurti CSS klasių rinkinį mygtukams stilizuoti.
- Trys spalvos, trys dydžiai, trys formos.



Kartojimas

- CSS Backgrounds
  - https://www.youtube.com/watch?v=zdubzXvqUyw&t=3s
- BEM
  - https://www.youtube.com/watch?v=MNPdifWAAa4
- CSS Reset
  - https://www.youtube.com/watch?v=L4wPV-K1lNI