


National University of Computer and Emerging Sciences

Lahore Campus

Q2: An object detection model has detected two distinct objects (Apples) with six redundant bounding boxes. The confidence scores for these 6 boxes (Box1-Box6) are 0.85, 0.65, 0.96, 0.99, 0.93, and 0.95 respectively. Apply the Non-Maximum Suppression (NMS) algorithm using an IoU threshold of 0.60. Show the sorting, comparison, and suppression steps, and identify the final set of unsuppressed bounding boxes. [8 Marks]

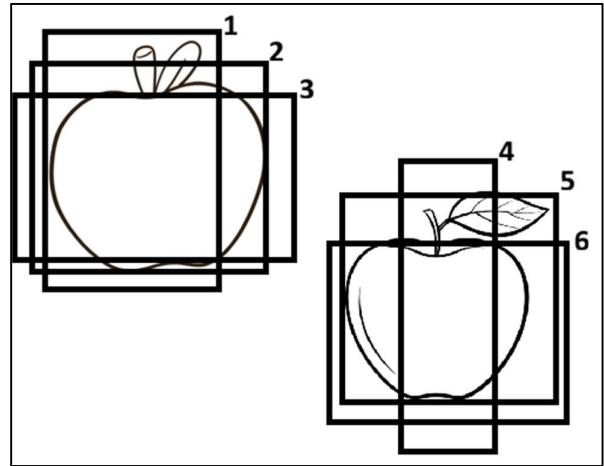

	1	2	3	4	5	6
1	1	0.7	0.6	0	0	0
2		1		0	0	0
3			1	0	0	0
4				1	0.5	0.55
5					1	0.8
6						1