



Aqsa Khalid
Lecturer
School of Computing

CS3002 Information Security




Database Security

Database Systems



- Collection of data stored for use by one or more applications
- Contains the relationships between data items and groups of data items
- Mostly contain sensitive data that needs to be secured
- Query language: Provides a uniform interface to the database

Database Architecture

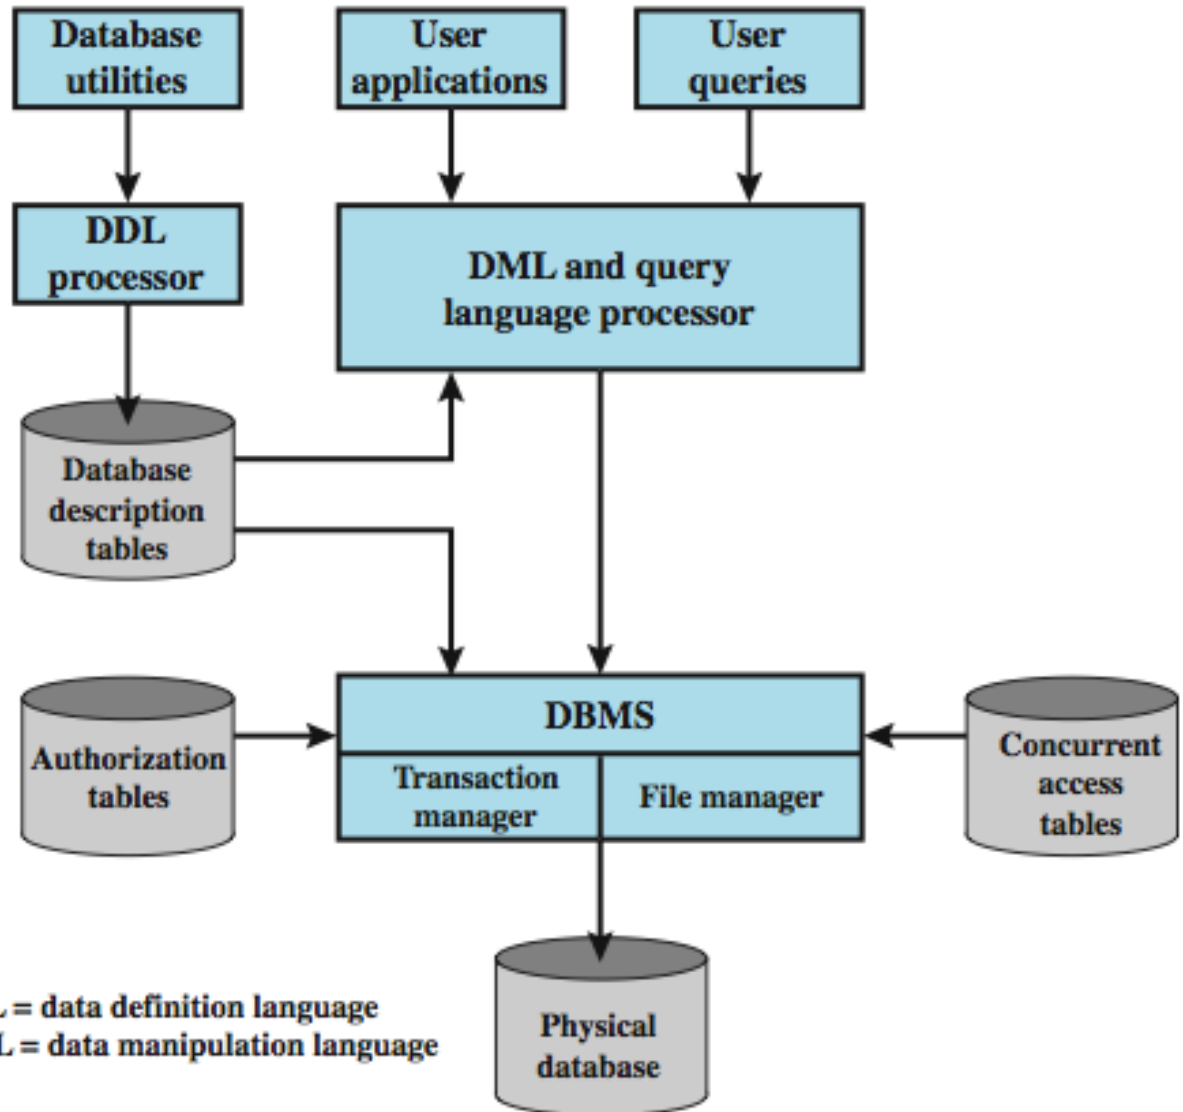


Relational Databases



- Table of data consisting of rows and columns
- Each column holds a particular type of data
- Each row contains a specific value for each column
- Ideally has one column where all values are unique, forming an identifier/key for that row
 - Enables the creation of multiple tables linked together by a unique identifier that is present in all tables
- Use a relational query language to access the database
 - Allows the user to request data that fit a given set of criteria

Relational Database Example

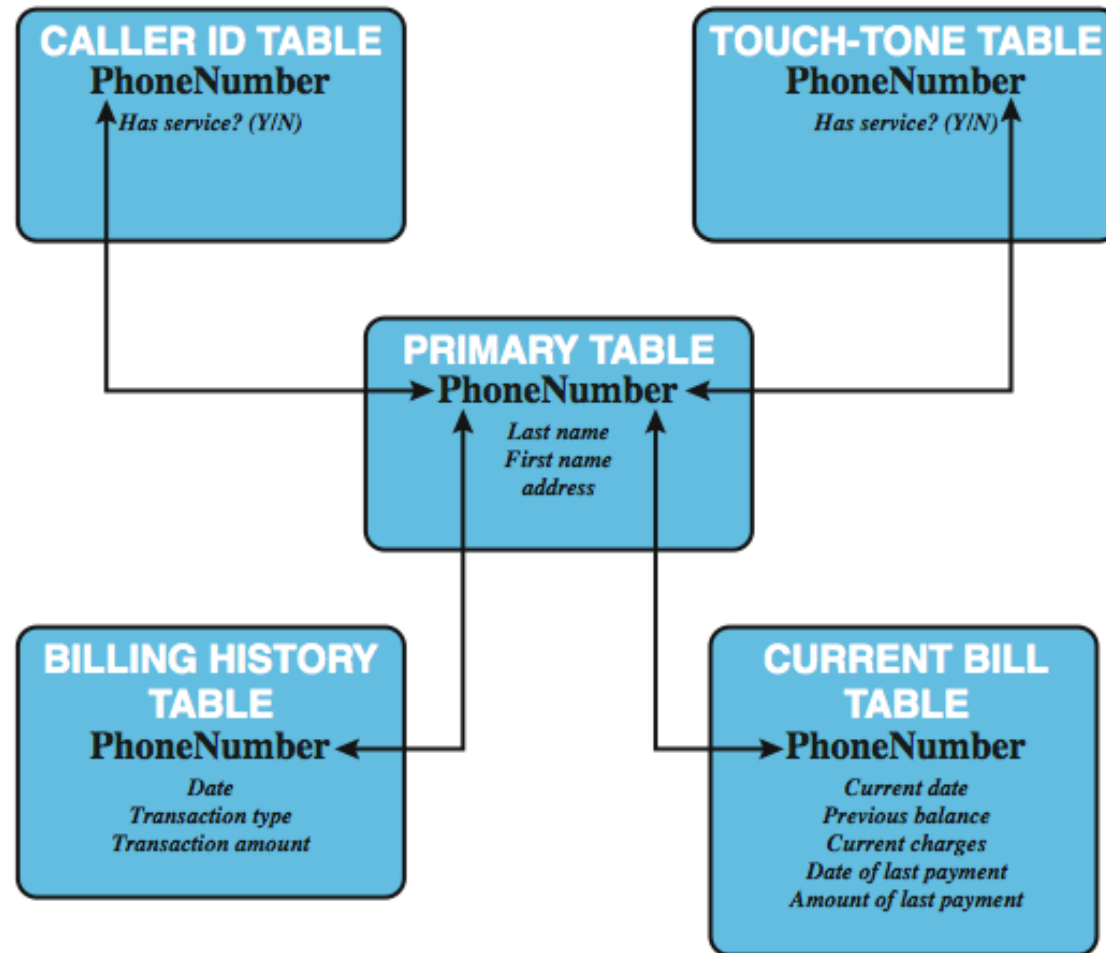

Relational Database Elements

Two tables in a db

Department Table

Did	Dname	Dacctno
4	human resources	528221
8	education	202035
9	accounts	709257
13	public relations	755827
15	services	223945

primary
key

Employee Table

Ename	Did	SalaryCode	Eid	Ephone
Robin	15	23	2345	6127092485
Neil	13	12	5088	6127092246
Jasmine	4	26	7712	6127099348
Cody	15	22	9664	6127093148
Holly	8	23	3054	6127092729
Robin	8	24	2976	6127091945
Smith	9	21	4490	6127099380

foreign
key

primary
key

A query that involves
JOINing two tables

Dname	Ename	Eid	Ephone
human resources	Jasmine	7712	6127099348
education	Holly	3054	6127092729
education	Robin	2976	6127091945
accounts	Smith	4490	6127099380
public relations	Neil	5088	6127092246
services	Robin	2345	6127092485
services	Cody	9664	6127093148



Structured Query Language



- SQL: originally developed by IBM in the mid-1970s
- standardized language to define, manipulate, and query data in a relational database
- several similar versions of ANSI/ISO standard

SQL Examples

```
CREATE TABLE department (  
    Did INTEGER PRIMARY KEY,  
    Dname CHAR (30),  
    Dacctno CHAR (6)  
)
```

```
CREATE TABLE employee (  
    Ename CHAR (30),  
    Did INTEGER,  
    SalaryCode INTEGER,  
    Eid INTEGER PRIMARY KEY,  
    Ephone CHAR (10),  
    FOREIGN KEY (Did) REFERENCES department (Did)  
)
```

```
SELECT D.Dname E.Ename, E.Eid, E.Ephone  
FROM Department D JOIN Employee E ON E.Did = D.Did
```



SQL Injection Attacks




SQL Injection Attacks (SQLi)



- One of the most prevalent and dangerous network-based security threats
- Attacker sends malicious requests — containing SQL commands — to web (or application) server, which forward the commands to the database server
- SQL injection can be exploited to:
 - Steal data in bulk
 - Modify or delete data
 - Execute arbitrary operating system commands
 - Launch denial-of-service (DoS) attacks

A typical injection attack

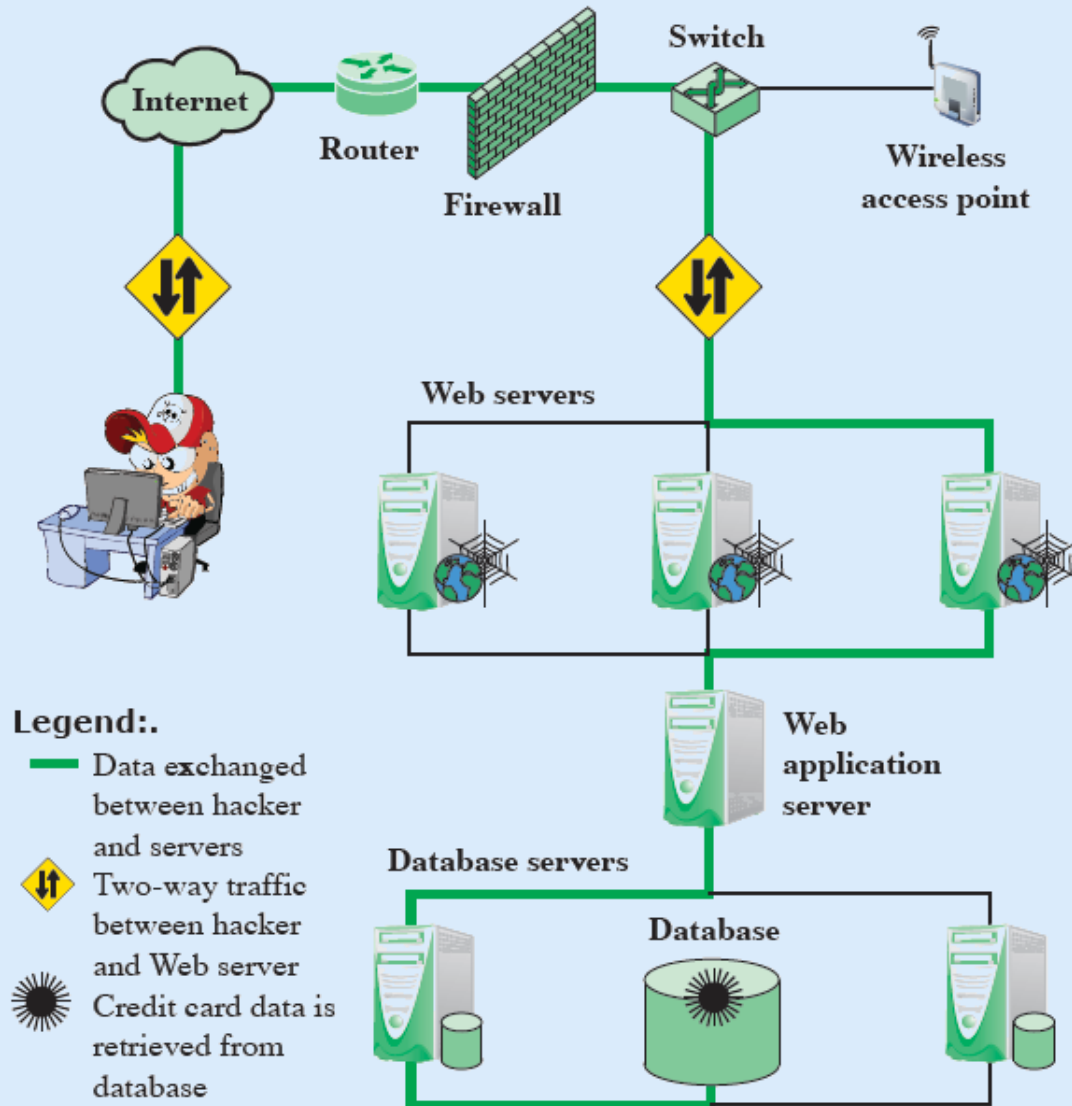

SQLi sequence of events



1. Hacker finds a vulnerability in a custom Web application and injects a SQL command to a database by sending the command to the Web server. The command is injected into traffic that will be accepted by the firewall.
2. The Web server receives the malicious code and sends it to the Web application server.
3. The Web application server receives the malicious code from the Web server and sends it to the database server.
4. The database server executes the malicious code on the database. The database returns data from (e.g.) credit cards table.
5. The Web application server dynamically generates a page with data including credit card details from the database.
6. The Web server sends the credit card details to the hacker

Injection Technique



- The SQLi attack typically works by prematurely terminating a text string and appending a new command.
 - Injected string is terminated with SQL comment mark (--)

```
SELECT fname, lname, phone  
FROM student  
WHERE fname = 'user_input';
```

What if user types the following input?

```
John'; DROP TABLE course; --
```

Example SQL injection



Server-side C# (ASP.NET) code to get data from a web form

```
var ShipCity = Request.form("ShipCity");  
var sql = "SELECT * FROM Orders WHERE ShipCity = '"  
          + ShipCity + "'";
```

If user enters **Redmond** in the form, query becomes
SELECT * FROM Orders WHERE ShipCity = 'Redmond';

Suppose, however, the user enters the following in the form:
Redmond'; DROP table Orders; --

This results in the following SQL query:

```
SELECT * FROM Orders WHERE ShipCity = 'Redmond'; DROP  
table Orders; --';
```

`Request.form()` returns the data submitted by user in HTTP POST request body.

In-band attacks



In-band: same channel used for injecting SQL code and retrieving results. Such attacks can include one or more of the following elements:

- **Tautology:** Attacker injects code containing one or more conditional statements that always evaluate to true
- **End-of-line comment:** After injecting code into a particular field, legitimate code that follows is nullified through usage of end of line comments
- **Piggybacked queries:** The attacker adds additional queries beyond the intended query, piggy-backing the attack on top of a legitimate request

Tautology Example



Server side PHP script

```
$query= "SELECT info FROM user WHERE name =  
'`$_GET["name"]`' AND pwd = '`$_GET["pwd"]`'";
```

Attacker submits following for the **name** field:

```
' OR 1=1 --
```

Query becomes

```
SELECT info FROM users  
WHERE name = '' OR 1=1 -- AND pwd = ''
```

`$_GET` provides the data submitted by user in HTTP GET request URL (aka query string).

Data exfiltration using UNIONs



With the help of UNION operator, an attacker can retrieve (and steal) data from other tables.

For example, if an application executes the following query (where **shirts** value is coming from client side)

```
SELECT name, description  
FROM products  
WHERE category = 'shirts';
```

An attacker can submit the input:

```
shirts' UNION SELECT username, password FROM users; --
```

which will make the server return all usernames and passwords along with the names and descriptions of products.

Inferential Attack (gathering info)



In this type of SQLi, there is no actual transfer of data, but the attacker is able to reconstruct the information by sending particular requests and observing the resulting behavior of the website/database server

a) illegal/logically incorrect queries

- lets an attacker gather important information about the type and structure of the backend database of a Web application
- considered as a preliminary step for further attacks.
 - The vulnerability leveraged by this attack is that the default error page returned by application servers is often overly descriptive.

Inferential Attack (gathering info)



Example illegal query (missing whitespaces)

```
SELECT*FROM table_nameWHERE id=@id"
```

Possible web response, which reveals the server side script

A screenshot of a web browser window. The address bar shows the URL 'notsosecureapp.com/orderitem?id=p11rutKSpNE%3d'. The main content area displays a red error message: 'Server Error in '/' Application.' followed by a description of an unclosed quotation mark and a stack trace. The stack trace shows the error occurred in a C# file at line 69, within a SQL query execution block.

← → ↻ notsosecureapp.com/orderitem?id=p11rutKSpNE%3d

Server Error in '/' Application.

*Unclosed quotation mark after the character string ".
Incorrect syntax near ".*

Description: An unhandled exception occurred during the execution of the current web request. Please review the stack

Exception Details: System.Data.SqlClient.SqlException: Unclosed quotation mark after the character string ".
Incorrect syntax near ".

Source Error:

```
Line 67:         SqlCommand cmd = new SqlCommand(sql, connection);
Line 68:         cmd.CommandType = CommandType.Text;
Line 69:         using (var reader = cmd.ExecuteReader())
Line 70:         {
Line 71:             while (reader.Read())
```

Inferential Attack (gathering info)



In other cases, database table and/or column names might be revealed.

Conversion failed when converting

ViewGallery.aspx?CatID=2' and 1=convert(int,(select top 1 ta

90%

Server Error in '/' Application.

Conversion failed when converting the nvarchar value 'Download_Dcoument' to data type int.

Description: An unhandled exception occurred during the execution of the current web request. Please review the stack trace for more information about the error and where it originated in the code.

Exception Details: System.Data.SqlClient.SqlException: Conversion failed when converting the nvarchar value 'Download_Dcoument' to data type int.

Source Error:

```
Line 29:      SqlDataAdapter da = new SqlDataAdapter(cmd);
Line 30:      DataSet ds = new DataSet();
Line 31:      da.Fill(ds);
Line 32:      dataList1.DataSource = ds;
Line 33:      dataList1.DataBind();
```

Source File: g:\pleskvhosts\angelhybrid.in\ViewGallery.aspx.cs **Line:** 31

Stack Trace:

```
[SqlException (0x80131904): Conversion failed when converting the nvarchar value 'Download_Dcoument' to data type int.]
System.Data.SqlClient.SqlConnection.OnError(SqlException exception, Boolean breakConnection, Action`1 wrapCloseInAction) +2582782
System.Data.SqlClient.SqlInternalConnection.OnError(SqlException exception, Boolean breakConnection, Action`1 wrapCloseInAction) +6033430
System.Data.SqlClient.TdsParser.ThrowExceptionAndWarning(TdsParserStateObject stateObj, Boolean callerHasConnectionLock, Boolean asyncClose) +297
System.Data.SqlClient.TdsParser.TryRun(RunBehavior runBehavior, SqlCommand cmdHandler, SqlDataReader dataStream, BulkCopySimpleResultSet bulkCopyHandler, TdsParserStat
System.Data.SqlClient.SqlDataReader.TryHasMoreRows(Boolean& moreRows) +242
System.Data.SqlClient.SqlDataReader.TryReadInternal(Boolean setTTimeout, Boolean& more) +275
System.Data.SqlClient.SqlDataReader.Read() +35
System.Data.Common.DataAdapter.FillLoadDataRow(SchemaMapping mapping) +216
System.Data.Common.DataAdapter.FillFromReader(DataSet dataset, DataTable datatable, String srcTable, DataReaderContainer dataReader, Int32 startRecord, Int32 maxRecord
System.Data.Common.DataAdapter.Fill(DataSet dataSet, String srcTable, IDataReader dataReader, Int32 startRecord, Int32 maxRecords) +422
System.Data.Common.DbDataAdapter.FillInternal(DataSet dataset, DataTable[] datatables, Int32 startRecord, Int32 maxRecords, String srcTable, IDbCommand command, Comman
System.Data.Common.DbDataAdapter.Fill(DataSet dataSet, Int32 startRecord, Int32 maxRecords, String srcTable, IDbCommand command, CommandBehavior behavior) +138
System.Data.Common.DbDataAdapter.Fill(DataSet dataSet) +89
```

Inferential Attack (gathering info)



b) Blind SQL injection

- Most systems have sufficient security in place to not display any erroneous information back to the attacker.
 - They could display a generic “404 Not Found” or “500 Internal Server Error” error page without revealing the exact database error message.
- Blind injection is used in such cases. It allows attackers to **infer** the data present in a database system.
- It is termed ‘blind’ because attacker can not see the SQL query results.
- For example, the attacker asks the server true/false questions to observe the functionality in each case.

Inferential Attack (gathering info)



Blind SQL injection Example

Suppose the URL <http://newspaper.com/items.php?id=2> sends the following query to the database:

```
SELECT title, descr, body FROM items WHERE ID = 2
```

The attacker may then try to inject a query that returns 'false':

<http://newspaper.com/items.php?id=2> and 1=2

Now the SQL query should look like this:

```
SELECT title, descr, body FROM items WHERE ID = 2 and 1=2
```

If the web application is vulnerable to SQLi, then it probably will not return anything (because WHERE clause is false). To make sure, the attacker will inject a query that will return 'true':

<http://newspaper.com/items.php?id=2> and 1=1

If the content of this page is different from the previous one, then the attacker is able to verify that injection is working.

Denial-of-Service using SQLi



Attackers can also inject queries that cause DBMS to perform long useless calculations, draining all CPU resources. e.g.

```
SELECT DECODE(  
    ENCODE(  
        CONVERT(COMPRESS(post) USING latin1),  
        CONCAT(post, post, post, post)  
    ),  
    SHA1(CONCAT(post, post, post, post))  
    ) AS column1  
FROM table_1;
```

Note: `ENCODE`(ptext, p) encrypts ptext with password p.
`DECODE` performs decryption.

Imagine running above query on a database containing thousands of `post` entries.

SQLi attempts – Real example



Lee Penkman created a form on his website. It was hidden, so actual users could not see it, only bots (scanning for vulnerabilities) could see and submit it.

Here are some of the things submitted:

- `1 UNION ALL SELECT NULL#`
- `-1 OR 2+456-456-1=0+0+0+1`
- `wrBEIRqX' || DBMS_PIPE.RECEIVE_MESSAGE(CHR(98) || CHR(98) || CHR(98),15) || '`
- `1;WAITFOR DELAY '0:0:5'—`
- `(SELECT (CASE WHEN (2646=4989) THEN 2646 ELSE 2646*(SELECT 2646 FROM INFORMATION_SCHEMA.CHARACTER_SETS) END))`

<https://github.com/lee101/hidden-form-on-the-internet>

SQLi countermeasures



(1) Using prepared statements (parameterized queries)

- All database engines support this feature, to distinguish between SQL code and data.
- Usage steps:
 - a. write the full SQL query, inserting placeholders (typically '?') for the parameter values. We may call it a parametrized statement.
 - b. call **prepare** function of database engine. It will parse the statement into a query.
 - c. finally, **bind** the parameters to query. This way, bound values will always be interpreted as data, even if they contain any malicious sql.

SQLi countermeasures



Prepared statements Java example


```
String query =  
    "INSERT INTO products (name, price) VALUES (?, ?)";  
PreparedStatement pstmt = connection.prepareStatement(query);  
  
String name = request.getParameter("productName");  
String price = request.getParameter("productPrice");  
  
// (input validation code goes here)  
  
pstmt.setString(1, name); // bind 1st parameter to its value  
pstmt.setDouble(2, Double.parseDouble(price)); // bind 2nd  
ResultSet results = pstmt.executeQuery();
```

How prepared statements work



Consider the query **SELECT * FROM BUGS WHERE bug_id = ?**


Database engine parses (compiles) the query as below

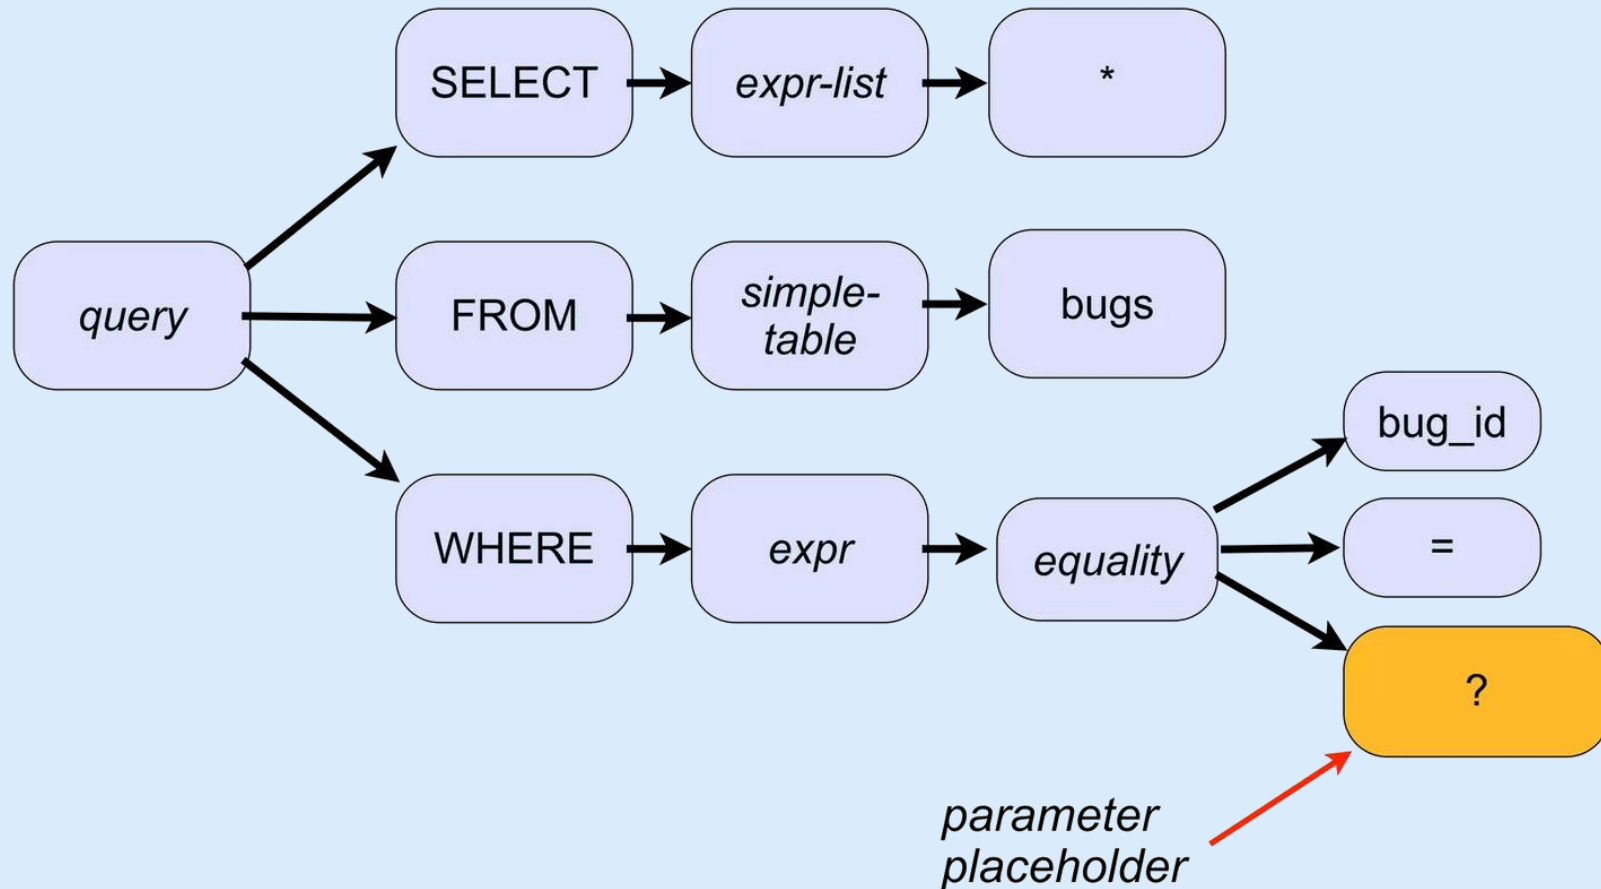

How prepared statements work




Example of normal usage

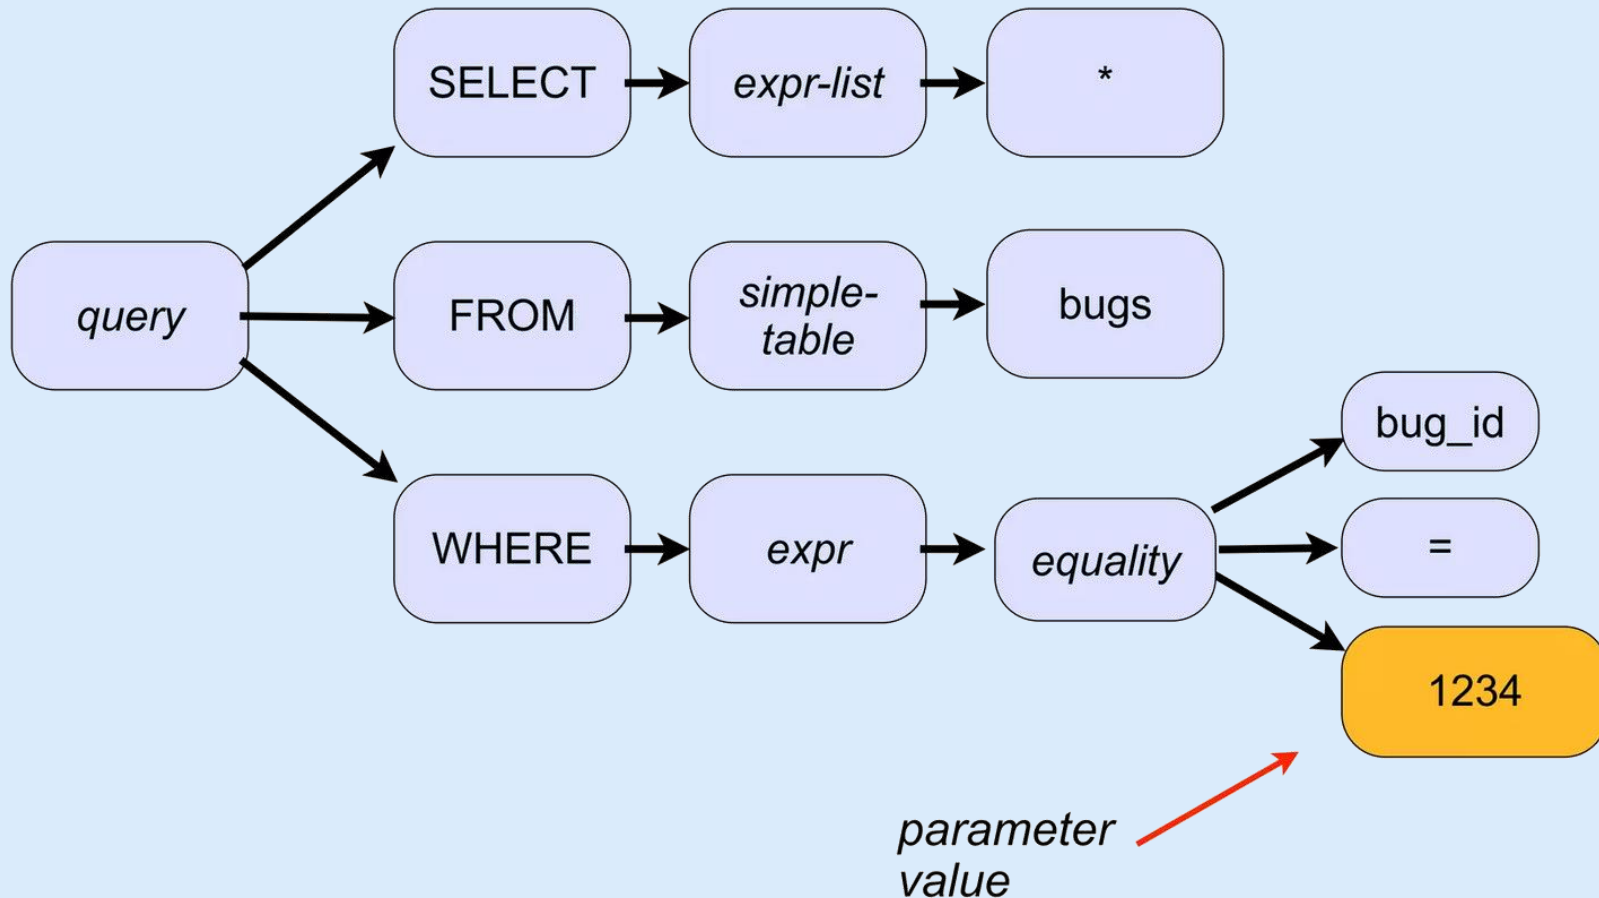

How prepared statements work




When a malicious input is passed in, like **1234 OR True**, and query is being prepared with interpolation (or concatenation), it becomes:

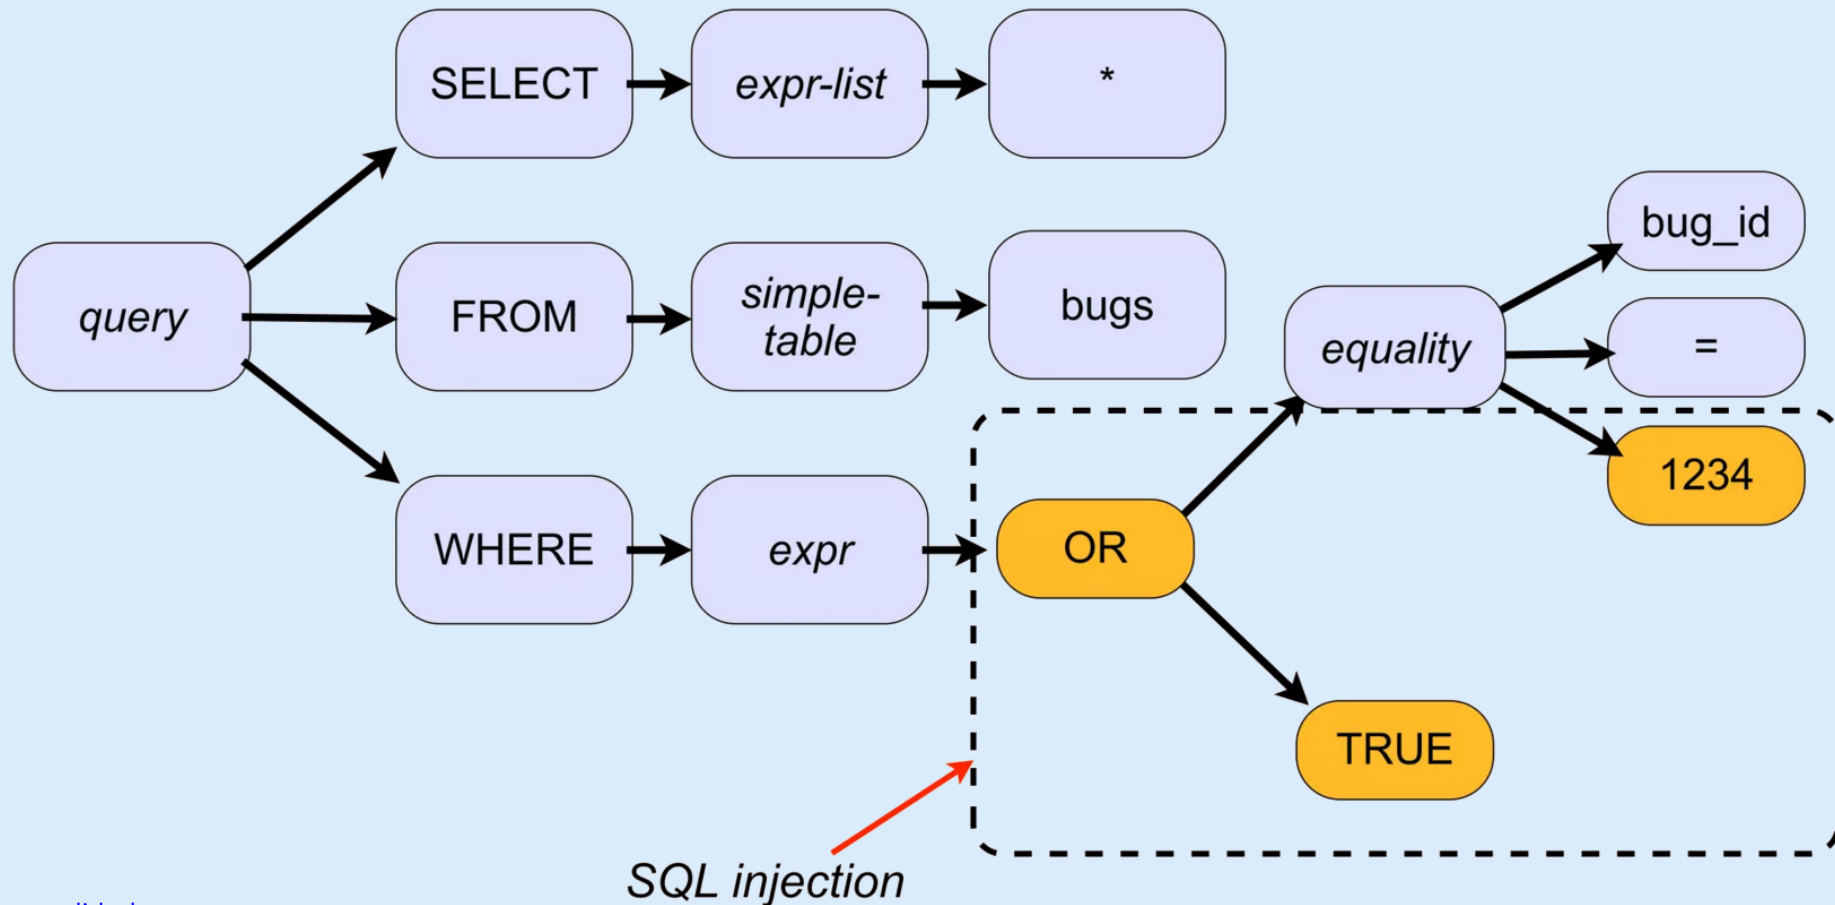

How prepared statements work



With prepared statements, every input is treated as data, not code. So the **parse tree can not change**.

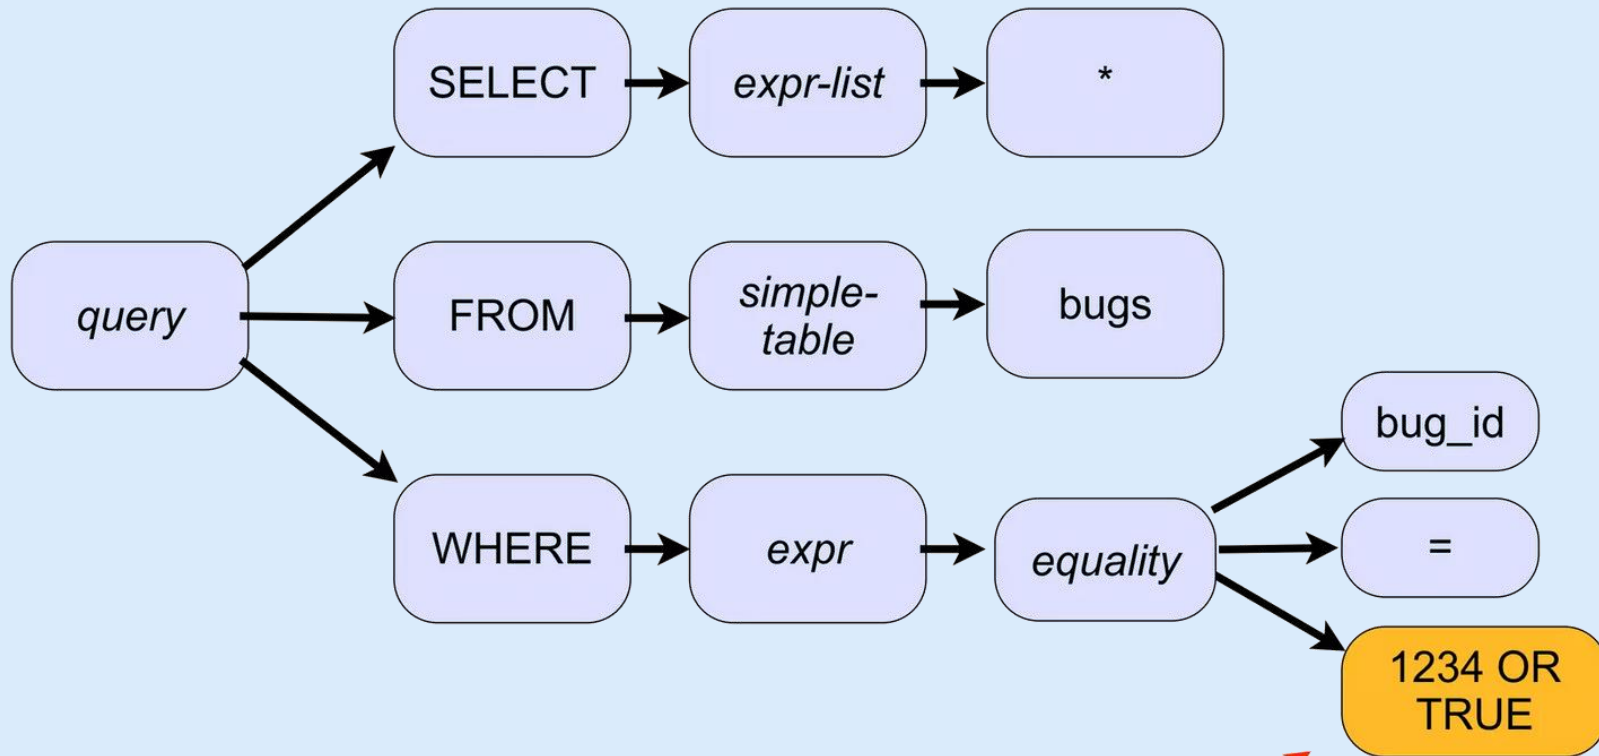

no parameter
can change the tree

SQLi countermeasures



(2) Stronger data validation

- type checking, e.g. to check that inputs that are supposed to be numeric contain no characters other than digits
- pattern matching to distinguish normal input from abnormal


(3) Sanitizing inputs

- Escape all special characters (quotes, semicolons, hyphens etc.) to sanitize (clean) all inputs from user
 - e.g. to use a literal single quote in string, include it twice, i.e. `'it''s me'` is interpreted as *it's me*

Further reading:

Prepared statements can't help in every case: <https://stackoverflow.com/a/43235265/1427771>

SQLi countermeasures

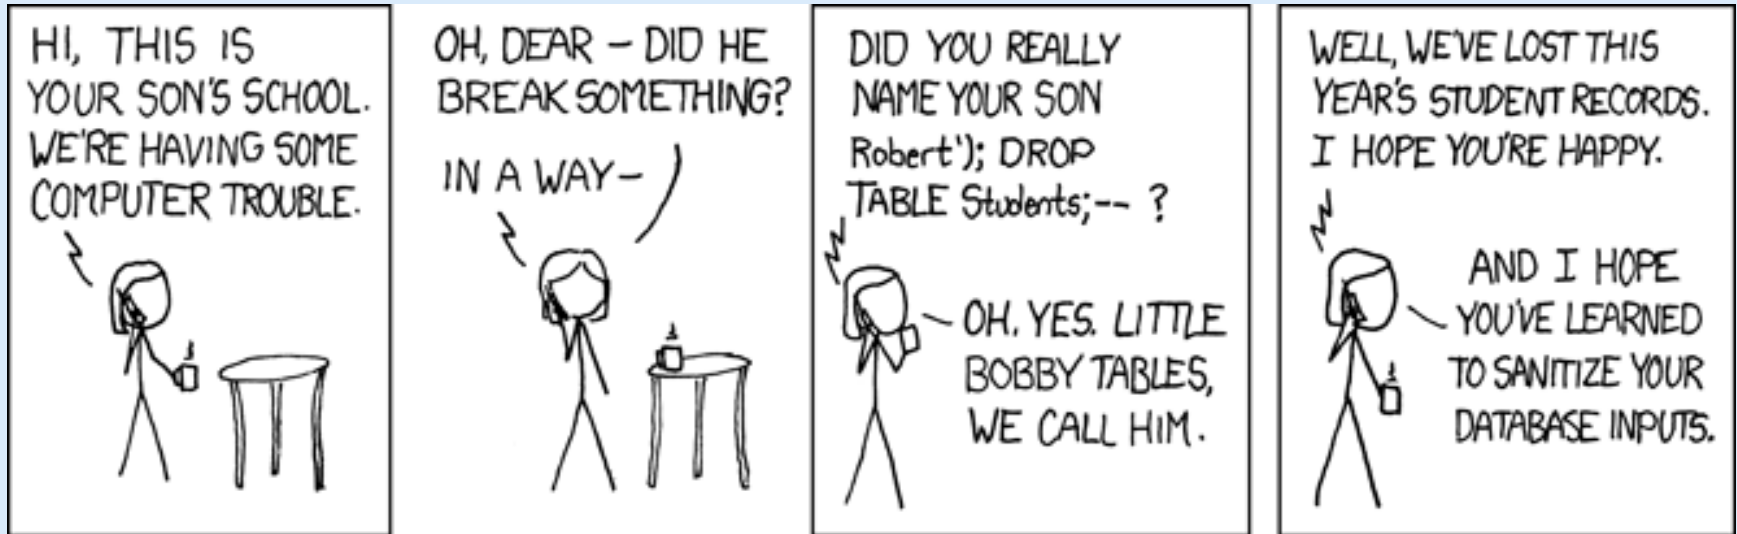

https://www.explainxkcd.com/wiki/index.php/327:_Exploits_of_a_Mom

References



- Stallings SPP chap 5