

## Challenge #11: How Tos

I write my website using ReactJs and TailwindCSS

### #1 Tabs

**LIMITS** DIFFERENTIATIONS

```
const Topics = () => {
  return (
    <div className='relative w-full py-2 px-4 z-10'>
      <nav className='w-full border-b-acc border-b-2'>
        <ul className='flex items-center gap-4'>
          <li><NavLink to="limits" className='text-white heading-3 uppercase font-bold'>Limits</NavLink></li>
          <li><NavLink to="differentiation" className='text-white heading-3 uppercase font-bold'>Differentiations</NavLink></li>
        </ul>
      </nav>
      <div className='w-full'>
        <Outlet/>
      </div>
    </div>
  )
}
```

### #2 Top Navigation

**CALCHUB**

**LIMITS** **DIFFERENTIATION**

```
const Header = () => {
  return (
    <div className='relative w-full py-6 px-4 flex items-center justify-between z-10'>
      <Link to="/" className='logo-text font-bold text-white'>CALC<span className='text-acc'>HUB</span></Link>
      <nav>
        <ul className='hidden items-center gap-6 text-white xl:flex'>
          <li className='heading-3 font-bold uppercase hover:text-acc hover:scale-125 transition-all ease-in-out'><Link to="/videos/limits">Limits</Link></li>
          <li className='heading-3 font-bold uppercase hover:text-acc hover:scale-125 transition-all ease-in-out'><Link to="/videos/differentiation">Differentiation</Link></li>
        </ul>
      </nav>
    </div>
  )
}
```

### #3 Round Buttons

**CLICK HERE**

```
<Link to="/videos/limits" className='button heading-3 ■ text-white font-bold uppercase transition-all ease-in-out'>Click Here</Link>
```

```
.button {
  background: linear-gradient(262deg, ■ #2BA84A -28.74%, ■ #055318 72.95%);
  padding: 8px 20px;
  border-radius: 30px;
}
```

## #4 Contact Form

**CONTACT FORM**

**Name**


**Email**

**Message**

**SUBMIT**

```
return (
  <div className='w-full h-[455px] xl:w-[48%] xl:h-[80%] xl:bg-none p-4'>
    <h2 className='heading-2 font-bold ■ text-white uppercase'>Contact Form</h2>
    <form>
      <label htmlFor="name" className='heading-3 ■ text-white block font-semibold'>Name</label>
      <input type="text" id="name" className='outline-none ■ border-acc border-2 rounded ■ bg-black ■ text-white w-full parag px-2 py-1'
        name="name" onChange={handleInput} value={inputs.name}/>
      <label htmlFor="email" className='heading-3 ■ text-white block font-semibold mt-3'>Email</label>
      <input type="text" id="email" className='outline-none ■ border-acc border-2 rounded ■ bg-black ■ text-white w-full parag px-2 py-1'
        name="email" onChange={handleInput} value={inputs.email}/>
      <label htmlFor="message" className='heading-3 ■ text-white block font-semibold mt-3'>Message</label>
      <textarea rows={5} type="text" id="message" className='outline-none ■ border-acc border-2 rounded ■ bg-black ■ text-white w-full parag p:
        py-1' name="message" onChange={handleInput} value={inputs.message}/>
      <button className='button heading-3 ■ text-white font-bold uppercase text-center relative left-[50%] translate-x-[-50%] mt-3
        transition-all ease-in-out' onClick={displayModal}>Submit</button>
    </form>
  </div>
)
```

## #5 Custom Scrollbar

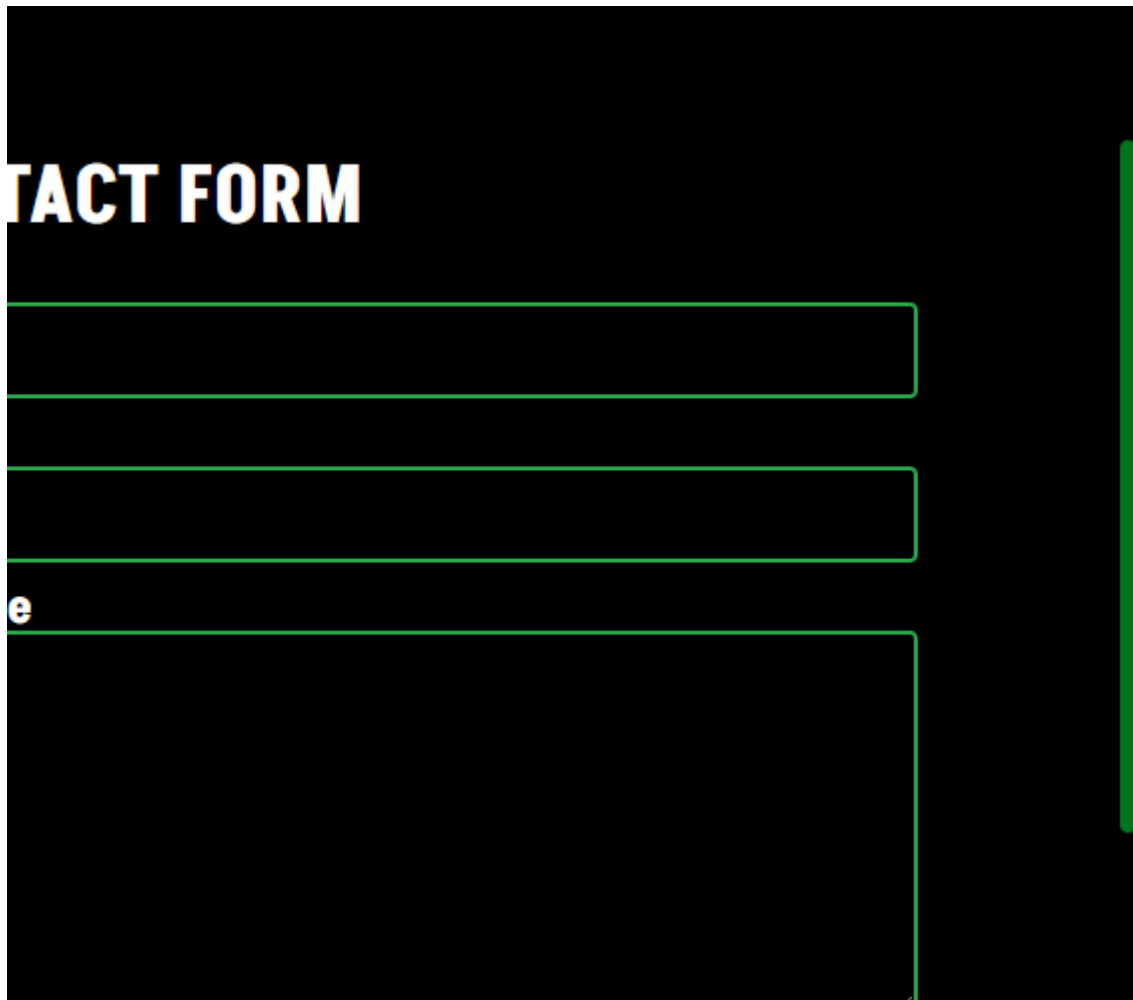

```
::-webkit-scrollbar {  
  width: 8px;  
}  
::-webkit-scrollbar-track {  
  background: #000;  
}  
::-webkit-scrollbar-thumb {  
  background: #057220;  
  border-radius: 8px;  
}  
::-webkit-scrollbar-thumb:hover {  
  background: #068827;  
}
```