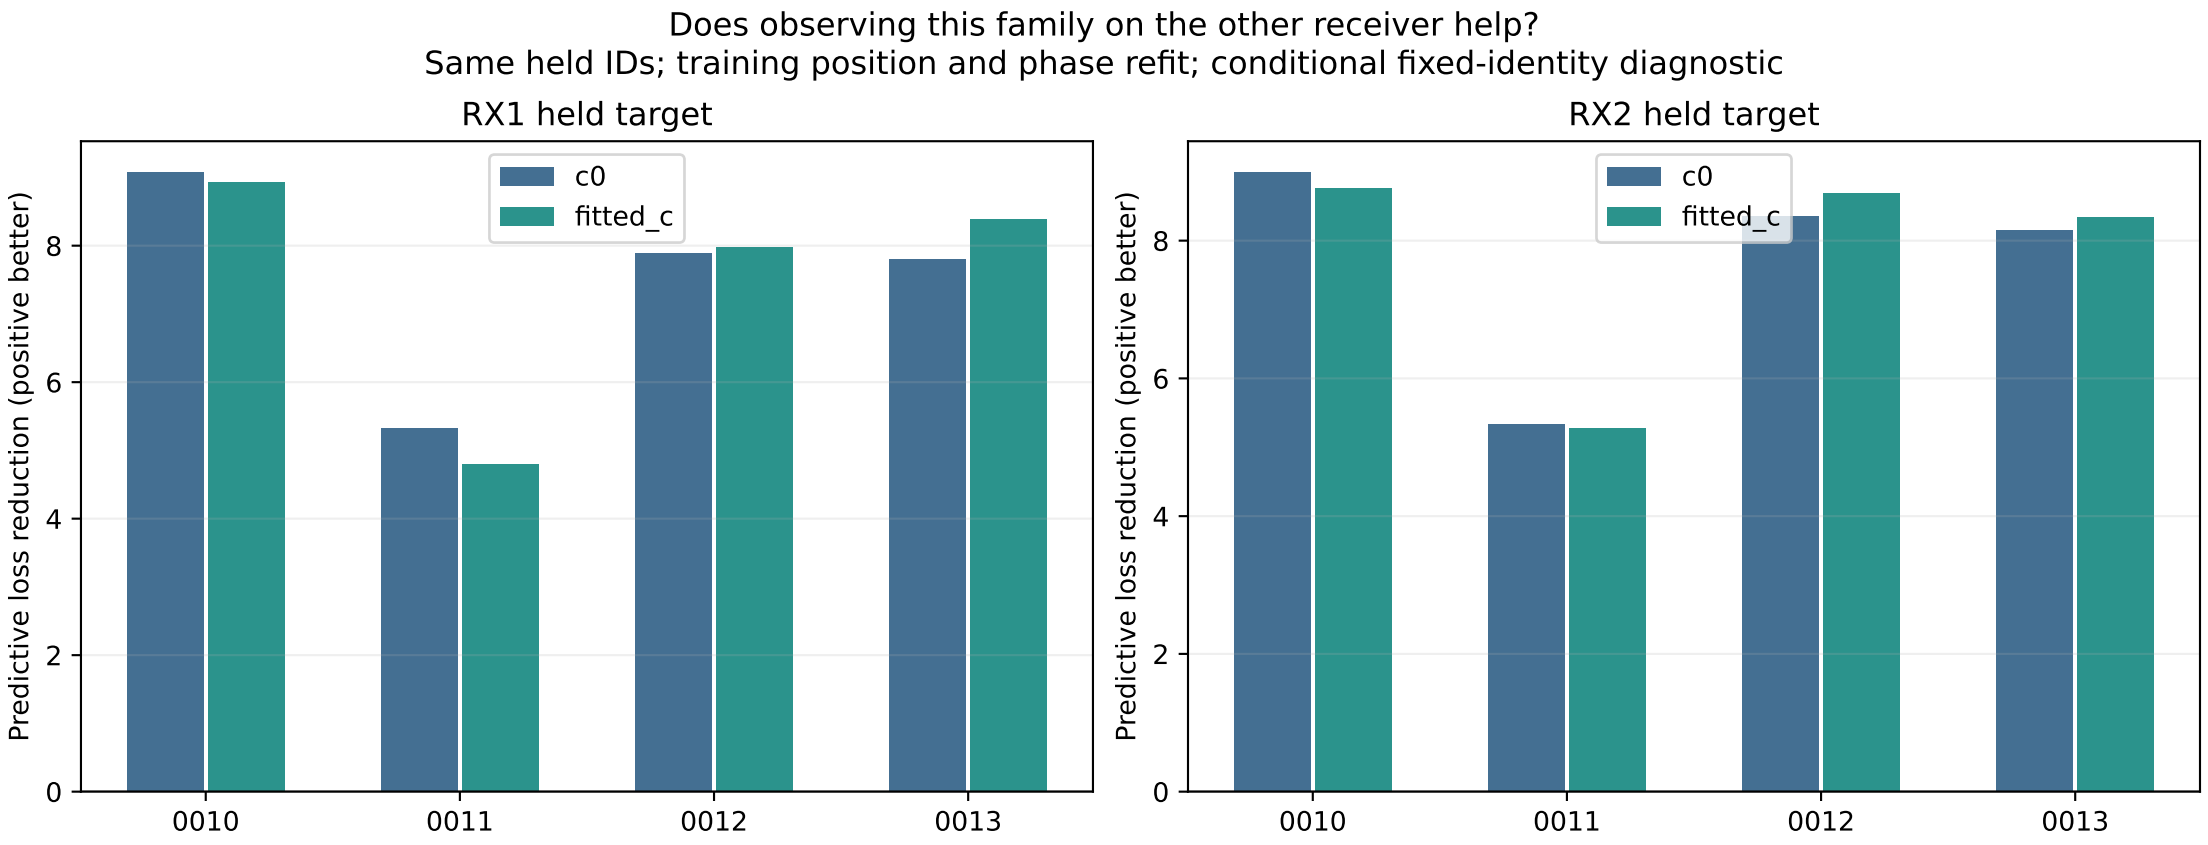
Does observing this family on the other receiver help?
Same held IDs; training position and phase refit; conditional fixed-identity diagnostic
RX1 held target
RX2 held target
c0
fitted_c
Predictive loss reduction (positive better)
0
2
4
6
8
0010
0011
0012
0013