


2025.12.12

→


簡單講物件導向

開始講DB物件導向寫法

```
11
12 Class DB{
13     private $dsn="mysql:host=localhost;dbname=db01;charset=utf8";
14     private $table;
15
16     public function __construct($table){
17         $this->table=$table;
18     }
19
20 }
```

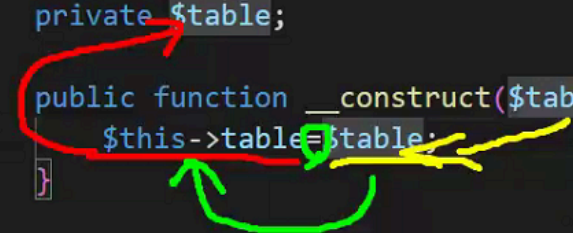

```
11
12 Class DB{
13     private $dsn="mysql:host=localhost;dbname=db01;charset=utf8";
14     private $table;
15     private $pdo;
16     public function __construct($table){
17         $this->table=$table;
18         $this->pdo=new PDO($this->dsn,'root','');
19     }
20
21
22     public function all(...$arg){
23
24         $sql="select * from `{$this->table}`";
25         if(!empty($arg)){
26
27         }
28
29         echo $sql;
30         return $this->pdo->query($sql)->fetchAll(PDO::FETCH_ASSOC);
31     }
32 }
```

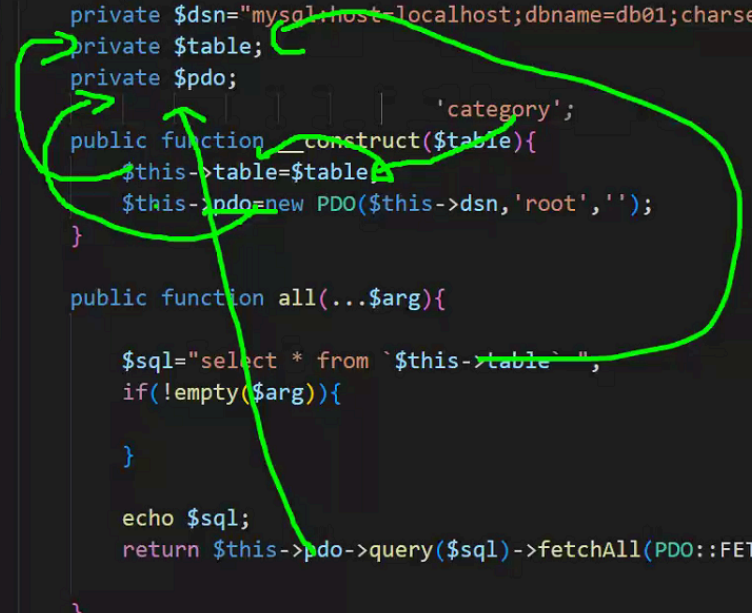

...的意思是陣列的資料

\$arg原意→

```
7 }  
8 $User=new DB('user');  
9 $Admin=new DB('admin');  
0 $Type=new DB('type');  
1 $Bot=new DB("bot");  
2 $Item=new DB("item");  
3 $Order=new DB("orders");  
4 ?>
```

這個步驟就是實例化!