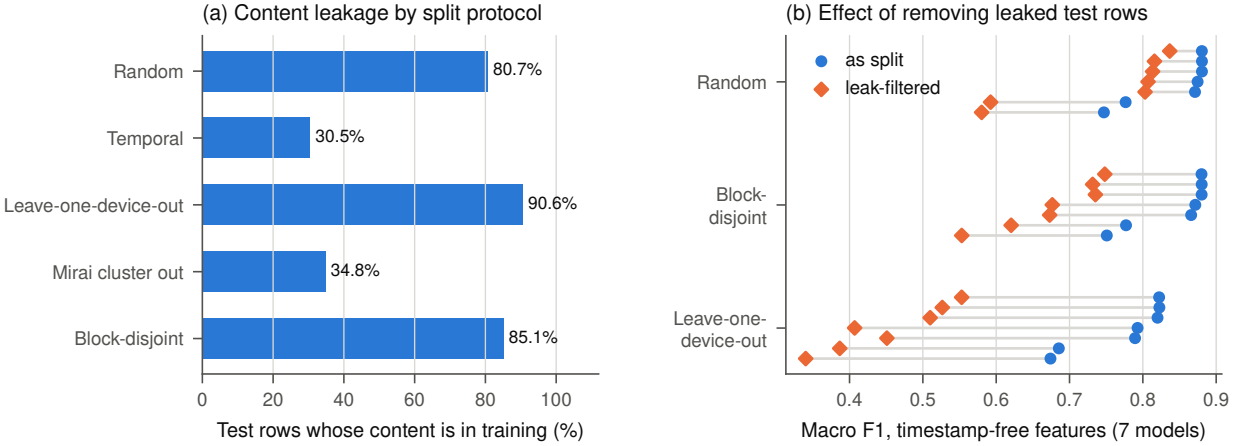
(a) Content leakage by split protocol
Random
Temporal
Leave-one-device-out
Mirai cluster out
Block-disjoint
80.7%
30.5%
90.6%
34.8%
85.1%
0
20
40
60
80
100
Test rows whose content is in training (%)
(b) Effect of removing leaked test rows
as split
leak-filtered
Random
Block-disjoint
Leave-one-device-out
0.4
0.5
0.6
0.7
0.8
0.9
Macro F1, timestamp-free features (7 models)