


Procedure: Setting up PocketSmart AI with a Gemini API key

Step 1: Open the project in Visual Studio Code

Launch Visual Studio Code and open the [PocketSmartAI_FIXED_VSCode](#) project folder. In the Explorer sidebar, open the [.env.example](#) file to review the environment variables you'll need to configure:

- [APP_NAME=PocketSmart AI](#)
- [SECRET_KEY=change-this-to-a-long-random-secret](#)
- [DATABASE_URI=sqlite:///pocketsmart.db](#)
- [GEMINI_API_KEY=](#)
- [GEMINI_MODEL=gemini-2.5-flash](#)
- [ACCESS_TOKEN_EXPIRE_MINUTES=120](#)
- [MAX_IMAGE_SIZE_MB=5](#)
- [ALLOWED_ORIGINS=http://127.0.0.1:8000,http://localhost:8000](#)


The workspace includes folders such as [venv](#) and [app](#), along with files like [README.md](#) and [pocketsmart.db](#).

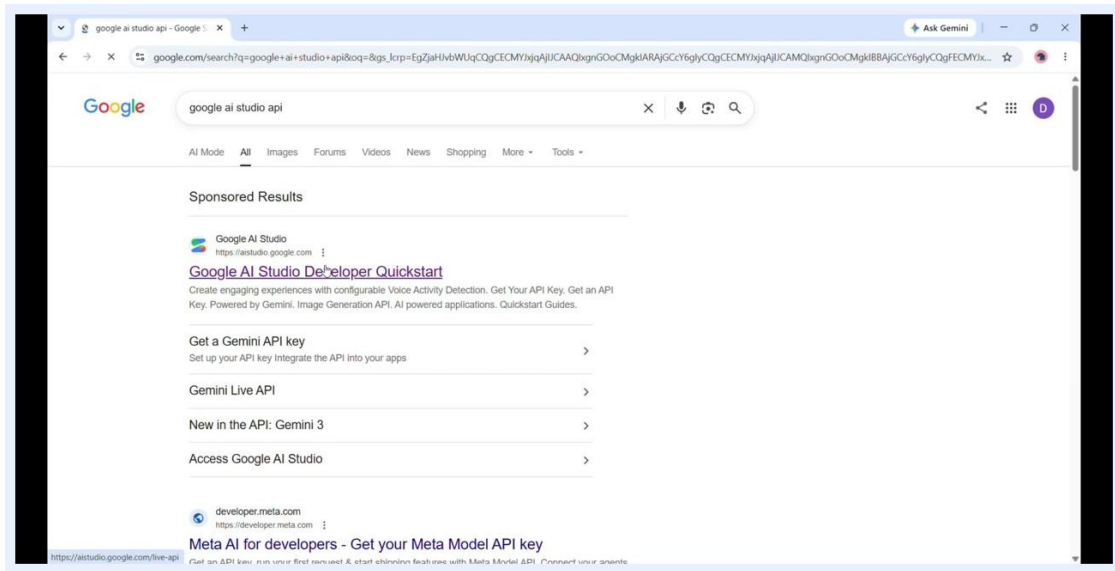

[.env.example](#) file with environment variables

Step 2: Search for Google AI Studio

Open a web browser, go to Google, and search for "google ai studio api." The top result is typically the Google AI Studio Developer Quickstart at aistudio.google.com, alongside related links such as "Get a Gemini API key" and "Access Google AI Studio."

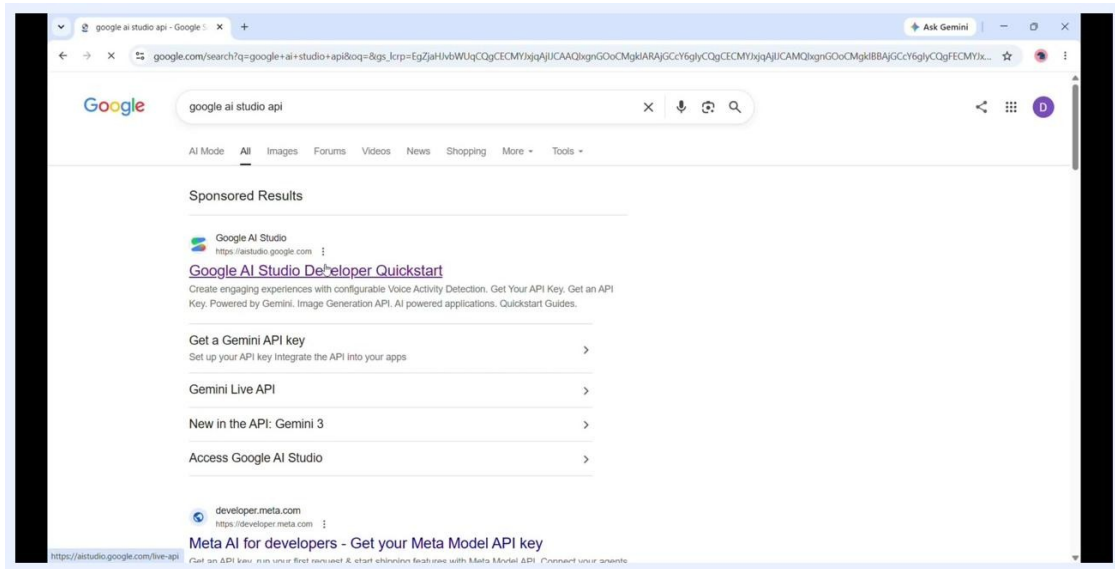

Google search results for Google AI Studio API

Step 3: Access API keys in Google AI Studio

Click through to Google AI Studio and sign in if prompted. Go to the API Keys section in the left sidebar. Here you'll see:

- A list of existing API keys grouped by key or project
- Each key's name, associated project (e.g., [Default Gemini Project](#)), creation date, and billing tier