

# MT

In [ ]:

In [15]:

```
import pandas as pd
from sklearn.preprocessing import StandardScaler
import seaborn as sns
import numpy as np
import matplotlib.pyplot as plt
import scipy.cluster.hierarchy as sch
from sklearn.decomposition import PCA
from sklearn.manifold import MDS
from sklearn.preprocessing import MinMaxScaler
%matplotlib inline
```

In [16]:

```
temp = pd.read_table("slump_test.data", sep=",")
temp2 = pd.read_table("slump_test.names")
display(temp)
#drop the No column along with the target variables other than 280day Compressive Strength
temp = temp.drop(columns=["No", "SLUMP(cm)", "FLOW(cm)"])
temp.head()
```

	No	Cement	Slag	Fly ash	Water	SP	Coarse Aggr.	Fine Aggr.	SLUMP(cm)	FLOW(cm)	Compressive Strength (28-day) (Mpa)
0	1	273.0	82.0	105.0	210.0	9.0	904.0	680.0	23.0	62.0	
1	2	163.0	149.0	191.0	180.0	12.0	843.0	746.0	0.0	20.0	
2	3	162.0	148.0	191.0	179.0	16.0	840.0	743.0	1.0	20.0	
3	4	162.0	148.0	190.0	179.0	19.0	838.0	741.0	3.0	21.5	
4	5	154.0	112.0	144.0	220.0	10.0	923.0	658.0	20.0	64.0	
...	...	...	...	...	...	...	...	...	...	...	
98	99	248.3	101.0	239.1	168.9	7.7	954.2	640.6	0.0	20.0	
99	100	248.0	101.0	239.9	169.1	7.7	949.9	644.1	2.0	20.0	
100	101	258.8	88.0	239.6	175.3	7.6	938.9	646.0	0.0	20.0	
101	102	297.1	40.9	239.9	194.0	7.5	908.9	651.8	27.5	67.0	
102	103	348.7	0.1	223.1	208.5	9.6	786.2	758.1	29.0	78.0	

103 rows × 11 columns

Out[16]:

	Cement	Slag	Fly ash	Water	SP	Coarse Aggr.	Fine Aggr.	Compressive Strength (28-day) (Mpa)
0	273.0	82.0	105.0	210.0	9.0	904.0	680.0	34.99
1	163.0	149.0	191.0	180.0	12.0	843.0	746.0	41.14
2	162.0	148.0	191.0	179.0	16.0	840.0	743.0	41.81
3	162.0	148.0	190.0	179.0	19.0	838.0	741.0	42.08
4	154.0	112.0	144.0	220.0	10.0	923.0	658.0	26.82

## Basic EDA

In [17]:

temp.info()

&lt;class 'pandas.core.frame.DataFrame'&gt;

RangeIndex: 103 entries, 0 to 102

Data columns (total 8 columns):

#	Column	Non-Null Count	Dtype
0	Cement	103 non-null	float64
1	Slag	103 non-null	float64
2	Fly ash	103 non-null	float64
3	Water	103 non-null	float64
4	SP	103 non-null	float64
5	Coarse Aggr.	103 non-null	float64
6	Fine Aggr.	103 non-null	float64
7	Compressive Strength (28-day)(Mpa)	103 non-null	float64

dtypes: float64(8)

memory usage: 6.6 KB

In [18]:

temp.describe().transpose()

Out[18]:

	count	mean	std	min	25%	50%	75%	max
<b>Cement</b>	103.0	229.894175	78.877230	137.00	152.00	248.00	303.900	374.00
<b>Slag</b>	103.0	77.973786	60.461363	0.00	0.05	100.00	125.000	193.00
<b>Fly ash</b>	103.0	149.014563	85.418080	0.00	115.50	164.00	235.950	260.00
<b>Water</b>	103.0	197.167961	20.208158	160.00	180.00	196.00	209.500	240.00
<b>SP</b>	103.0	8.539806	2.807530	4.40	6.00	8.00	10.000	19.00
<b>Coarse Aggr.</b>	103.0	883.978641	88.391393	708.00	819.50	879.00	952.800	1049.90
<b>Fine Aggr.</b>	103.0	739.604854	63.342117	640.60	684.50	742.70	788.000	902.00
<b>Compressive Strength (28-day) (Mpa)</b>	103.0	36.039417	7.838232	17.19	30.90	35.52	41.205	58.53


## Observations:

1. This dataset has no null values
2. The data is not scaled and if we were to perform PCA on the dataset then we would have to scale and/or standardize the data
3. Columns like Cement, Slag, Fly ash, Water are somewhat evenly distributed with few outliers since the 75% mark is close to the maximum value of the column. However, we can confirm this using boxplots.

In [19]:

```
#Confirming the distributions
#names of the columns
col_names = temp.columns
col_names


#plotting boxplots
plt.figure(figsize=(25,30))
for i in range(len(col_names)):
    plt.subplot(4,3,i+1)
    sns.boxplot(y=temp[col_names[i]])
    plt.xlabel(col_names[i])
    plt.ylabel("")
```

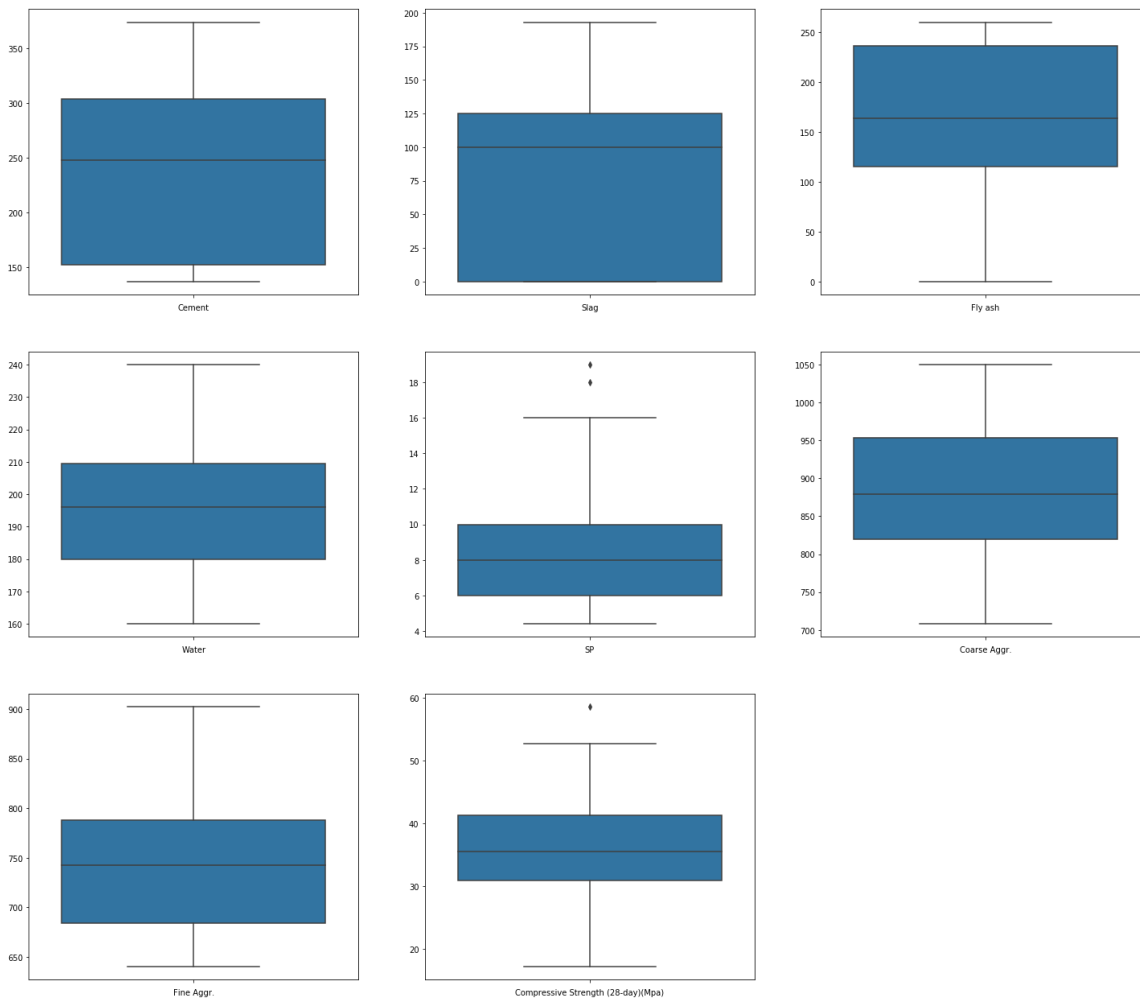

As expected, most columns, except SP and the target variable are evenly distributed.

In [20]:

```
#We can also plot them on a single plot since they all have the same units (kg of compo  
nent in 1 M^3 of concrete )  
plt.subplots(figsize=(12, 8))  
ax = sns.boxplot(data=temp)  
ax.set_xticklabels(ax.get_xticklabels(), rotation=90);
```

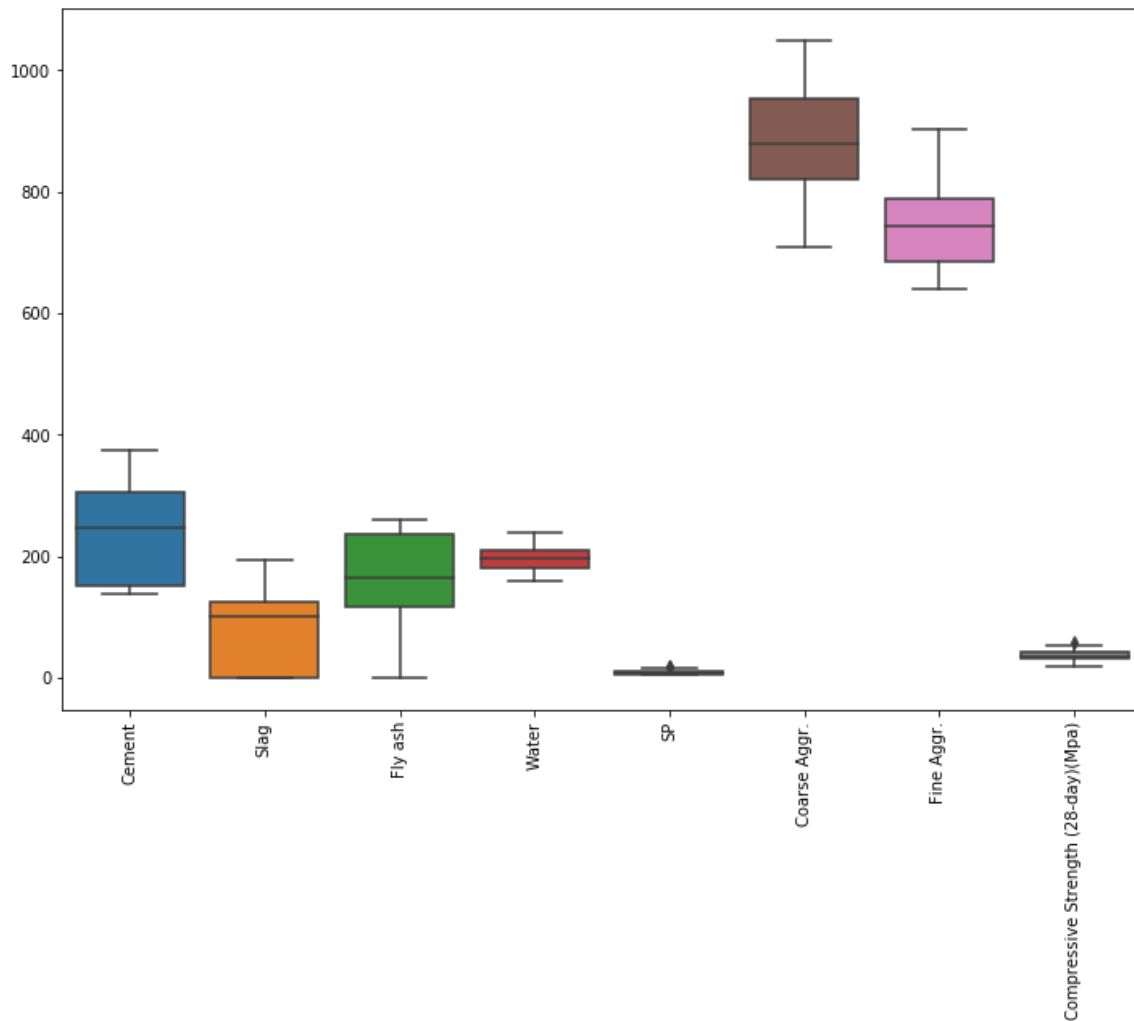


In [21]:

```
#Understanding the correlation between the variables
r = sns.PairGrid(temp)
r.map_upper(plt.scatter)
r.map_diag(sns.kdeplot, lw=3, legend=True)
r.map_lower(plt.plot)
```

Out[21]:

&lt;seaborn.axisgrid.PairGrid at 0x1aa9cc3d108&gt;

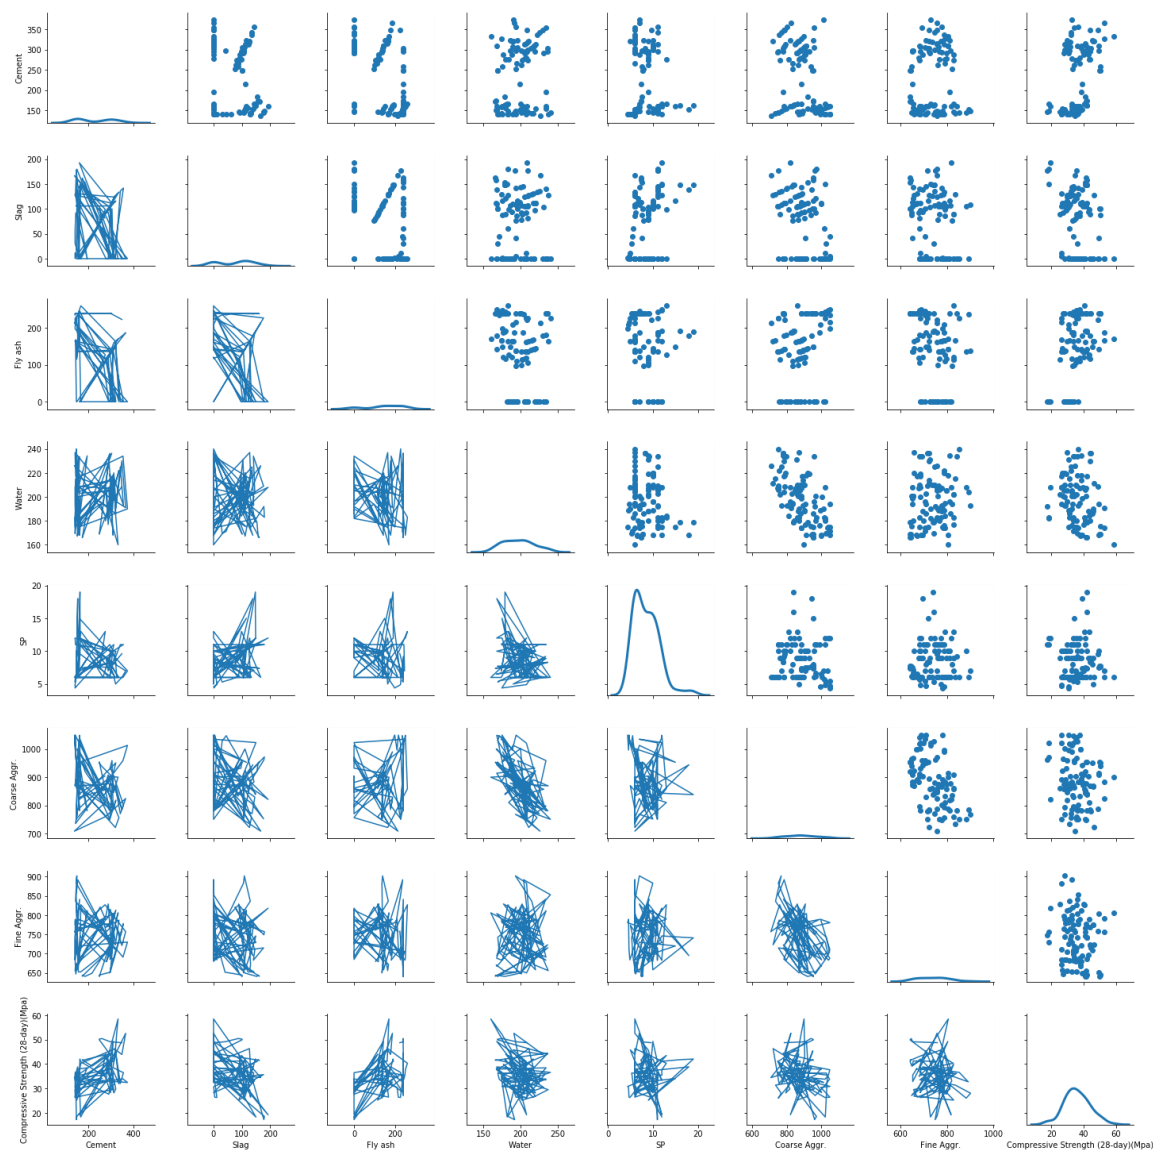

## Observation:


1. Cement, Slag, Fly Ash all seem to have 2 peaks hence they have a bimodal distribution which would make sense intuitively.
2. SP also has 2 peaks but one of them is higher than the other one.
3. Cement and Fly Ash seem to have a positive correlation with compressive strength (our target variable)
4. Water and Coarse Aggr. have a weak negative correlation

In [22]:

```
#Plotting Heat Maps to get a more accurate
sns.heatmap(temp.corr(), annot = True)
```

Out[22]:

<matplotlib.axes.\_subplots.AxesSubplot at 0x1aa9d6c1408>

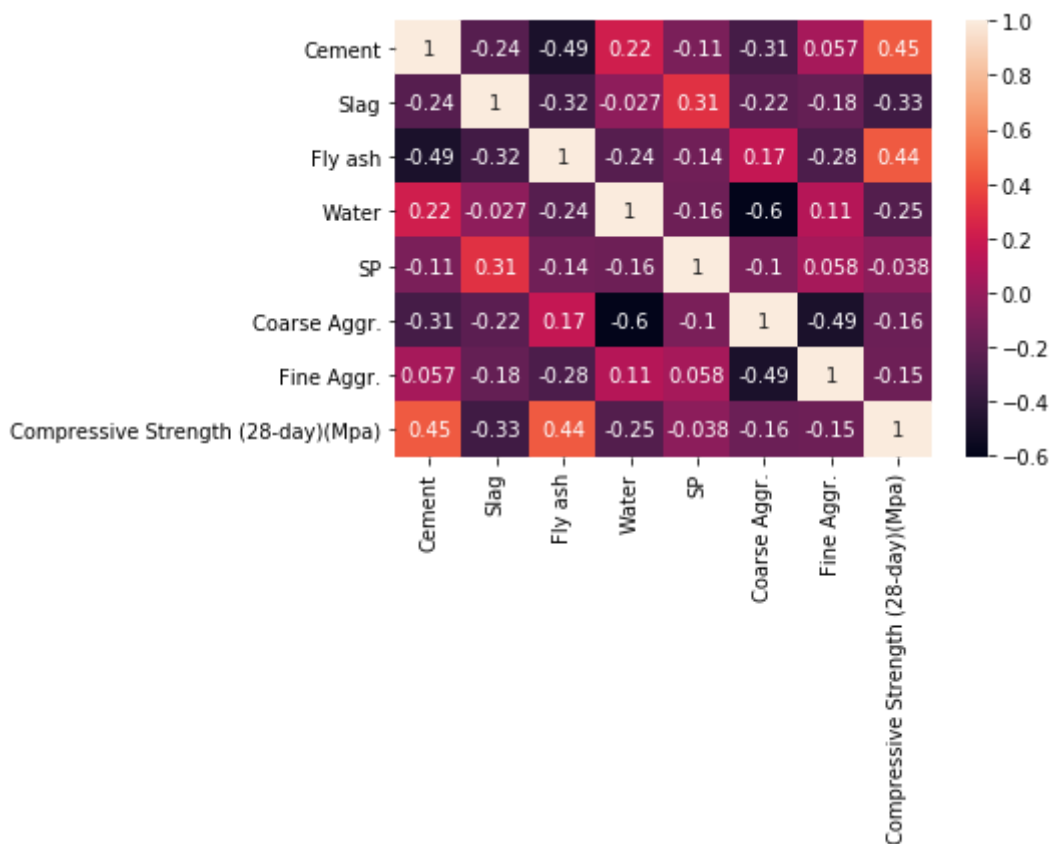

## Observations:

1. As we predicted, Cement and Fly Ash have a positive correlation to Compressive Strength while we learn that Slag and Water are negatively correlated to Compressive Strength. Sp, Coarse Aggr, and Fine Aggr. are all weakly correlated to Compressive Strength.
2. Cement and Fly-ash have a strong negative correlation
3. Water and Coarse Aggr. have a strong negative correlation.

In [ ]:

## PCA

While we have made some predictions, I would like to try another method to see if we can learn something more about the dataset

In [23]:

```
temp.columns
```

Out[23]:

```
Index(['Cement', 'Slag', 'Fly ash', 'Water', 'SP', 'Coarse Aggr.',
       'Fine Aggr.', 'Compressive Strength (28-day)(Mpa)'],
      dtype='object')
```

In [24]:

```
#Step 1: Extract the features from the dataset
data = temp.drop(columns=('Compressive Strength (28-day)(Mpa)'), inplace=False)

#Step 2: Standardize the data
x = StandardScaler().fit_transform(X = data.values)
display(x.shape, np.mean(x), np.std(x))

#convert the normalized features back into a dataframe
feature_cols = data.columns
concrete_norm1 = pd.DataFrame(data=x, columns=feature_cols)
concrete_norm1.tail()
```

```
(103, 7)
```

```
-2.0572232467395412e-16
```

```
1.0
```

Out[24]:

	Cement	Slag	Fly ash	Water	SP	Coarse Aggr.	Fine Aggr.
<b>98</b>	0.234489	0.382704	1.059799	-1.405679	-0.300589	0.798321	-1.570661
<b>99</b>	0.230667	0.382704	1.069210	-1.395734	-0.300589	0.749436	-1.515135
<b>100</b>	0.368258	0.166639	1.065681	-1.087427	-0.336382	0.624381	-1.484993
<b>101</b>	0.856197	-0.616180	1.069210	-0.157533	-0.372174	0.283322	-1.392979
<b>102</b>	1.513577	-1.294291	0.871569	0.563508	0.379472	-1.111610	0.293416



In [25]:

```
#using the sklearn library to perform pca on the normalised dataset


pca_concrete = PCA(n_components=7)
principalComp_concrete = pca_concrete.fit_transform(x)

print('The proportion of variance explained by each PC: {}'.format(pca_concrete.explained_variance_ratio_))
```

```
The proportion of variance explained by each PC: [0.31779551 0.21620366 0.15837992 0.14373075 0.09732565 0.0661284 0.00043611]
```

In [26]:

```
#creating a scree plot to determine th number of components to be used
PC_values = np.arange(pca_concrete.n_components_) + 1
plt.plot(PC_values, pca_concrete.explained_variance_ratio_, 'ro-', linewidth=2)
plt.title('Scree Plot')
plt.xlabel('Principal Component')
plt.ylabel('Proportion of Variance Explained')
plt.show()
```

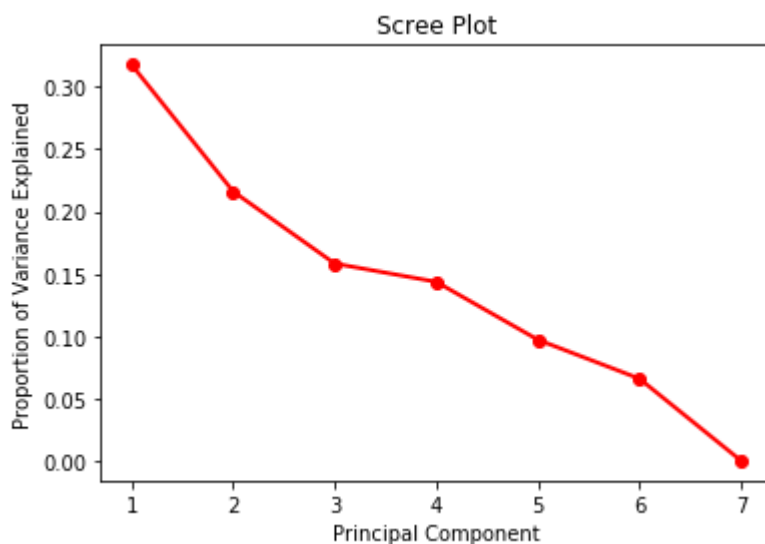

Ideally, PCA is performed on datasets with a large number of columns, which might mean that a big proportion of them are irrelevant. In this case, we only have 7 columns out of which 4 are the key components that make up concrete:

1. Water
2. Coarse aggr.
3. Fine aggr.
4. Cement

However, we can see in the scree plot that the first 4 PCs explain 83.6% of the variance. We can make an educated guess that the part discarded could be a combination of the additional chemicals added to concrete such as superplasticizer, fly ash which we saw had a positive correlation with strength of the cement and could contribute to it durability.

In [27]:

```
sum(pca_concrete.explained_variance_ratio_[:4])
```

Out[27]:

0.8361098405885852

In [28]:

```
#creating a dataframe with the pca components of the all the samples
pc_concrete_df = pd.DataFrame(data=principalComp_concrete, columns=['pc_'+str(i) for i
in range(1,8)])
pc_concrete_df = pc_concrete_df.drop(columns=["pc_5", "pc_6", "pc_7"])
pc_concrete_df
```

Out[28]:

	pc_1	pc_2	pc_3	pc_4
0	0.267519	0.048998	-0.944112	0.746884
1	-0.488953	1.844713	0.832270	-0.288779
2	-0.452798	2.699056	0.902533	-0.783674
3	-0.398914	3.341436	0.950733	-1.136015
4	-0.490634	0.849283	0.053376	1.469176
...	...	...	...	...
98	-2.013182	0.087107	-0.849752	0.523874
99	-1.966723	0.083172	-0.798182	0.502728
100	-1.710631	-0.174662	-0.748766	0.584401
101	-0.943042	-1.026062	-0.638782	0.746259
102	1.099560	-1.353299	0.336996	-0.344661

103 rows × 4 columns

This dataframe can be further used for regression. (PC Regression)

In [ ]:

In [ ]: