



Explore

Analyse

Discovery

Models

Review

Library

Jobs · 3

Settings

Analyse

Chain build here · open a block to tune it · drop_motifs is an illustrative example

Search spans, runs, families

Ctrl K

3 need you

M4 held out

drop_motifs9 unsaved

Signal span · CH4_A2 · 825-875 s

surrogate 200x

≈ 0.6 s · 03 → 04

History


Import

Save template

Re-run from 03

Source


cached - → Signal
signal span from Explore · 50 s

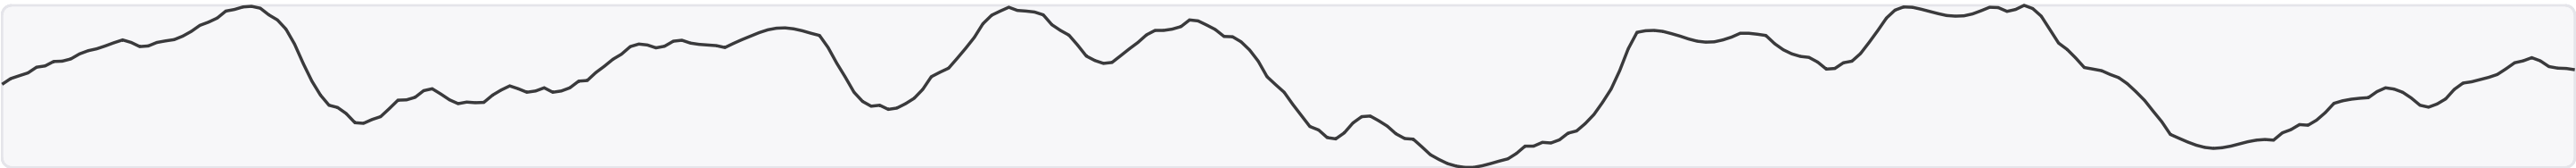

+ insert

01 Baseline removal


cached Signal → Signal
7 s rolling median subtracted

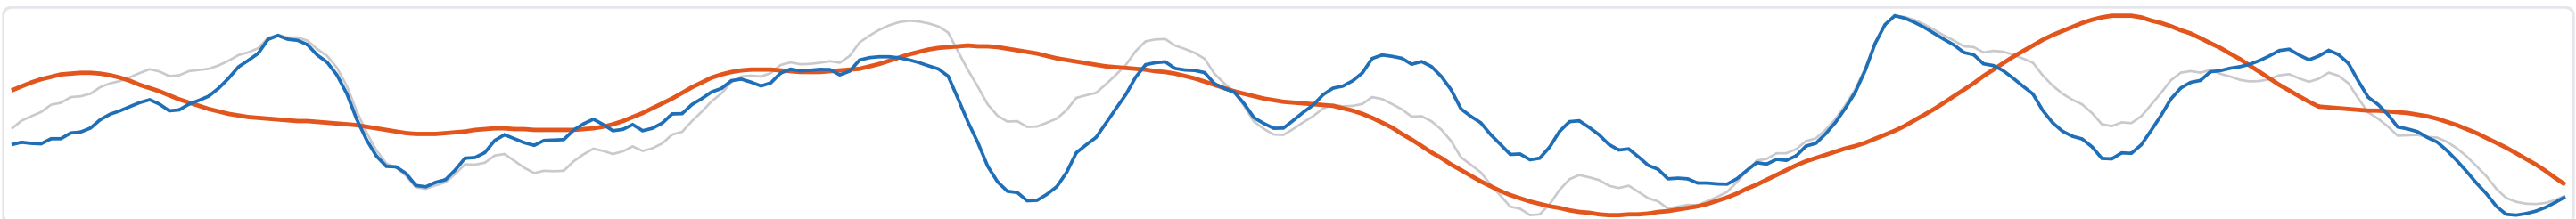

+ insert

02 Noise floor


cached Signal → Signal + estimate
slope noise σ · d starts at 8 σ

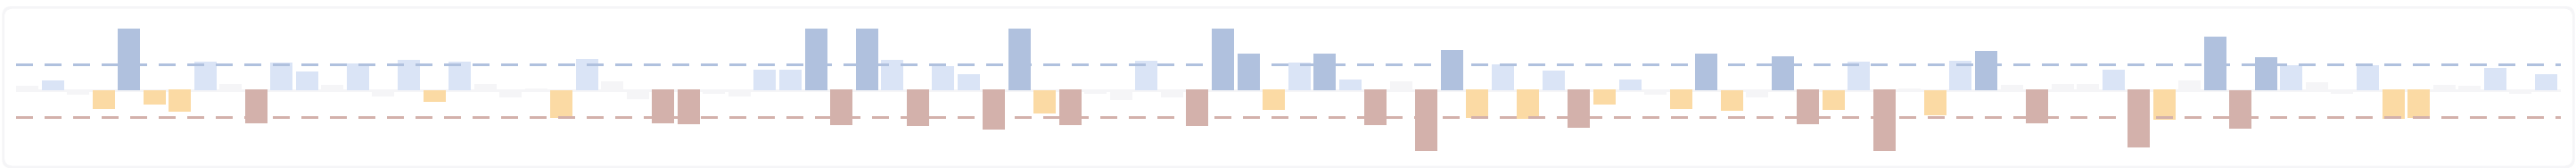

+ insert

03 Symbolic encoding

stale Signal → Encoding
0.2 s segments → dSAX letters

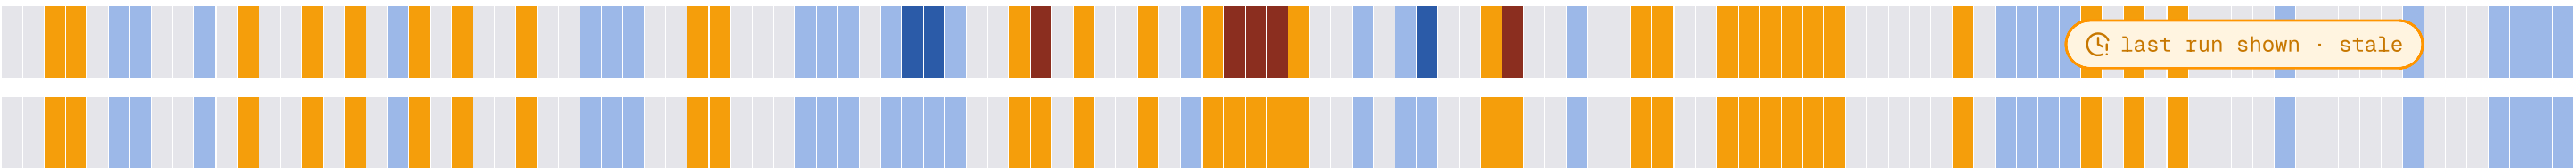

last run shown · stale

+ insert

04 Drop detection

stale Encoding → SpanSet
23 raw · 6 kept after dedupe



last run shown · stale

all rows share this time axis 825 s 835 s 845 s 855 s 865 s 875 s

terminal SpanSet → detection template

last run · 6 detections kept

23 raw · surrogate 2.1 [0-5] per run over 200 · 2.9× above chance

Export run

→ Analyse events

→ Pass 6 to Review