



Explore

Analyse

Discovery

Models

Review

Library

Jobs · 3

Settings

Analyse

Chain build here · open a block to tune it · drop_motifs is an illustrative example

Search spans, runs, families

Ctrl K

3 need you

M4 held out

drop_motifs9 unsaved

Signal span · CH4_A2 · 825-875 s

surrogate 200x

02 running · ~ 0.2 s left

History


Import

Save template

Cancel

Source


cached - → Signal
signal span from Explore · 50 s

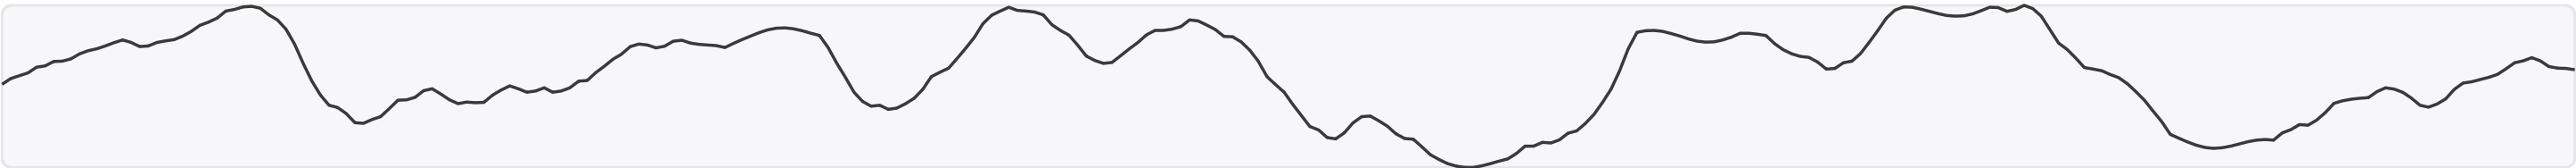

+ insert

01 Baseline removal


cached Signal → Signal
7 s rolling median subtracted

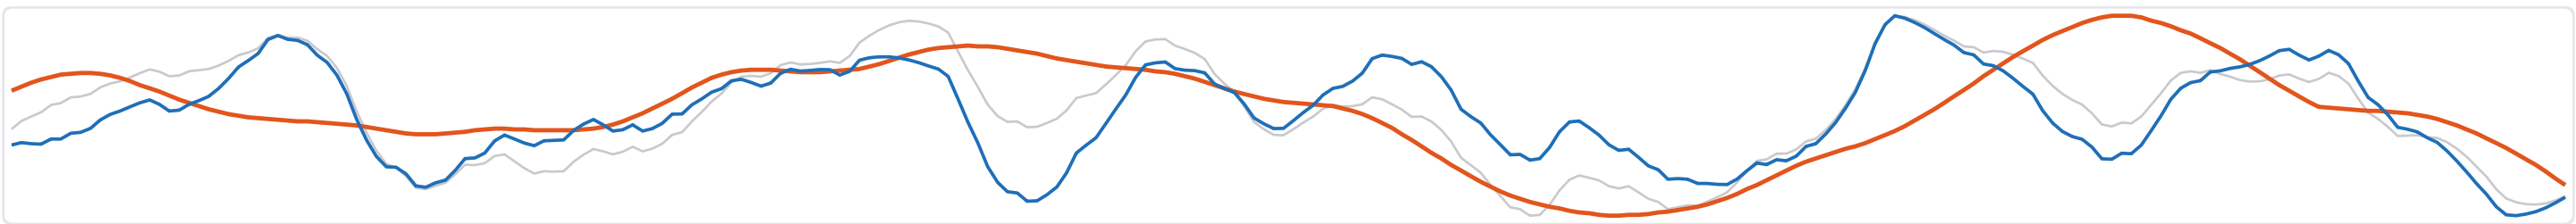

+ insert

02 Noise floor

running Signal → Signal + estimate
slope noise σ · d starts at 8σ

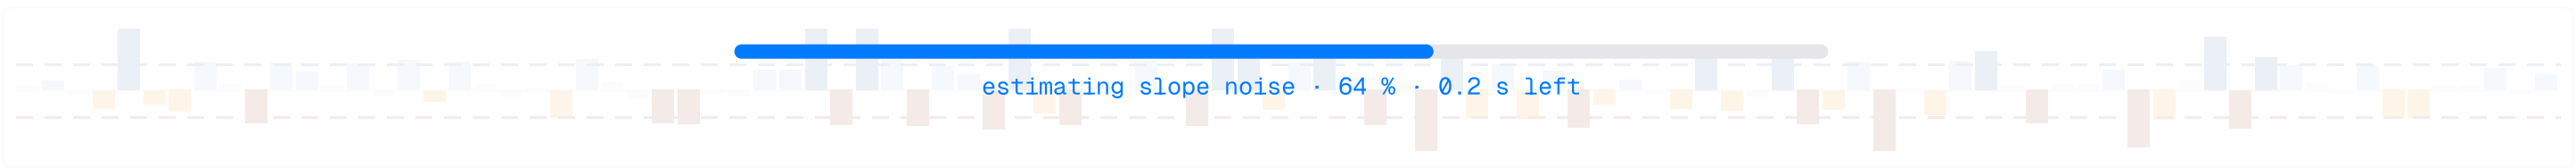

+ insert

03 Symbolic encoding

new Signal → Encoding
0.2 s segments → dSAX letters



+ insert

04 Drop detection

new Encoding → SpanSet
-



all rows share this time axis

825 s

835 s

845 s

855 s

865 s

875 s

terminal SpanSet → detection template

Running 02 of 04

stages land as they finish · surrogate run #135 queued after

Export run

Analyse events

Pass to Review