



Jobs · 3



Settings

Analyse

Chain

single span · a Scores block ends the chain · add a threshold to get spans

Search spans, runs, families

Ctrl K

3 need you

M4 held out

mp_span_CH4 run 14 · saved

Signal · CH4_A2 · 6.0-12.0 h · 6 h

null IAAFT 200x

4 min · local

History

Import

Save template

Run chain

Source


cached - → Signal
span 6.0-12.0 h · 6 h · 1 Hz



+ insert

01 Matrix profile

cached Signal → Scores
m 600 s · exclusion m/2 · z-normalised · STUMP

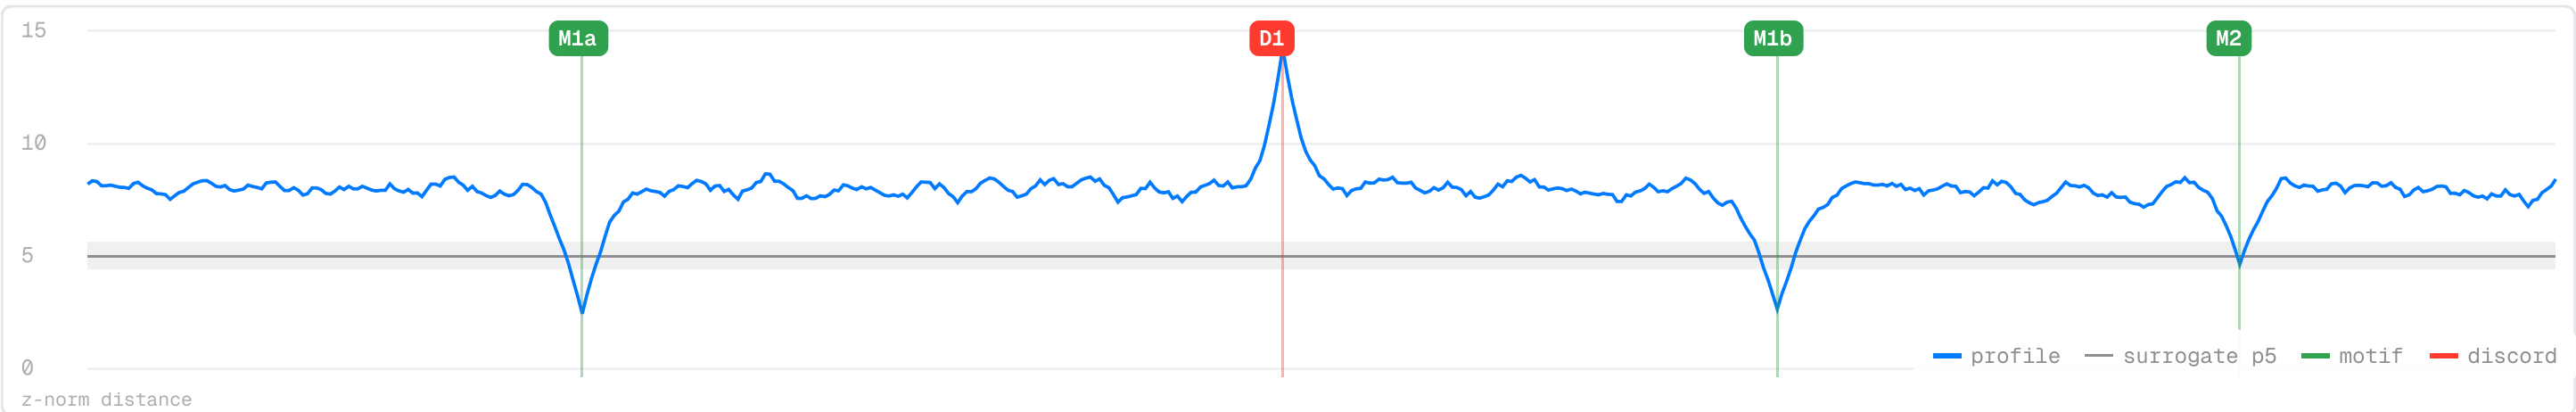

+ insert · end of chain

Scores → SpanSet fits here

Threshold to spans · Top-k motif pairs · Peak picker – 3 blocks accept Scores

Browse compatible

+ Insert Threshold to spans

all rows share this time axis 6.00 h 7.00 h 8.00 h 9.00 h 10.00 h 11.00 h 12.00 h

terminal Scores

21,600 values · one per second · 0.2 MB on disk

3 motif pairs and 1 discord below / above the surrogate p5 · no spans yet – add a threshold

Export run

Show as Explore track

Pass to Review

Template notes — every Signal → Scores block reuses this row

annotation · not part of the UI · spec §6.8

Row thumbnail — from the Scores renderer

- series against the chain's shared time axis
- null reference drawn behind (surrogate p5 / p95 band)
- top locations marked, colour = kind (motif · discord · peak)
- one-line legend inside the plot, bottom right

Left panel — same for every block

- number · name · status badge · type signature
- one line of the parameters that define the output
- open · bypass · duplicate · delete
- settings icon opens the block page (frame 7)

States inherited from the chain page

- over the local ceiling → HPC card in place of the plot (1g)
- running → progress drawn left-to-right over the series (1d)
- stale → veil over the plot until re-run
- end of chain → compatible next blocks suggested