



Analyse

01 Baseline removal transform block · input vs output, and what it does downstream

Search spans, runs, families

Ctrl K

3 need you

M4 held out

full chain

drop_motifs9 unsaved

Signal span · CH4_A2 · 825-875 s

surrogate 200x

window 5 → 7 s · re-runs 01 → 04 ≈ 0.9 s


Save template

Apply & re-run from 01



01 Baseline removal Signal → Signal

stacked overlay difference

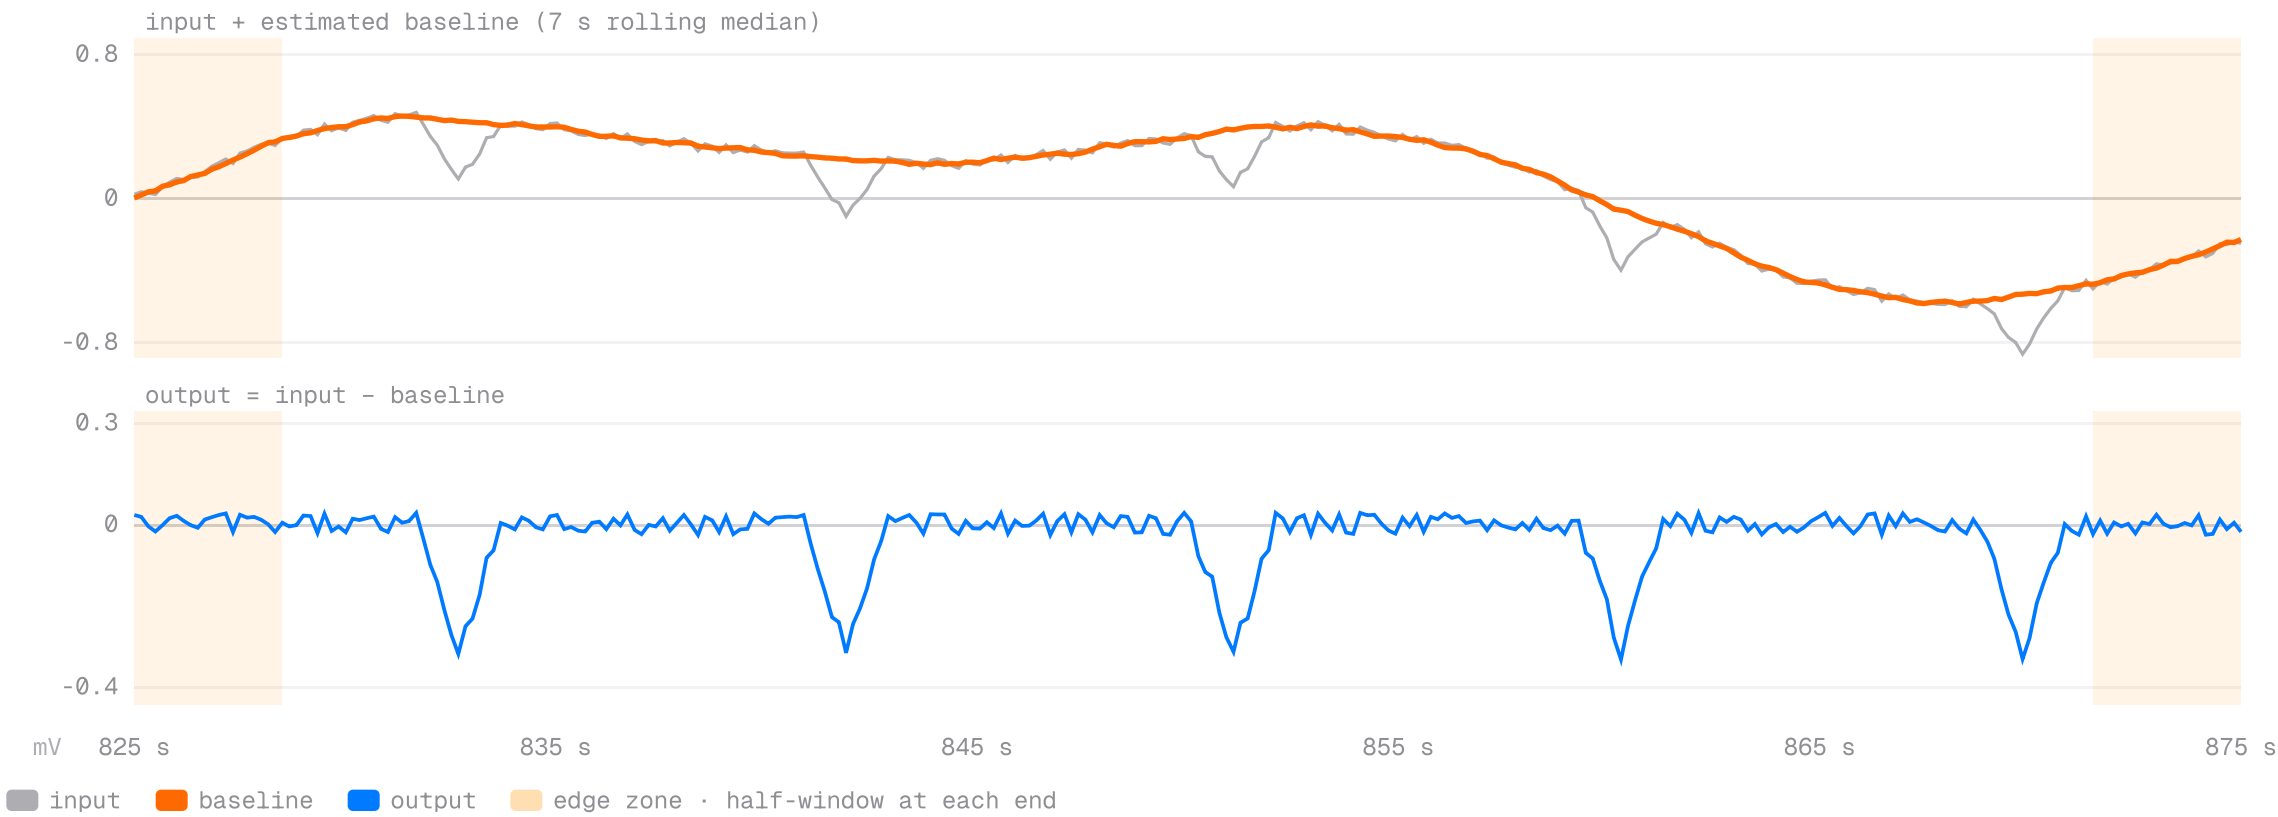

Parameters

recommended

method
rolling median

window 7 s (was 5) edges reflect

= 3 × longest expected event

variance removed 71 %


residual drift 0.4 μ V/s

edge samples 7 s × 2

⚠ window < 2 × event length starts eating drop depth

Try other windows

same stretch · click to set

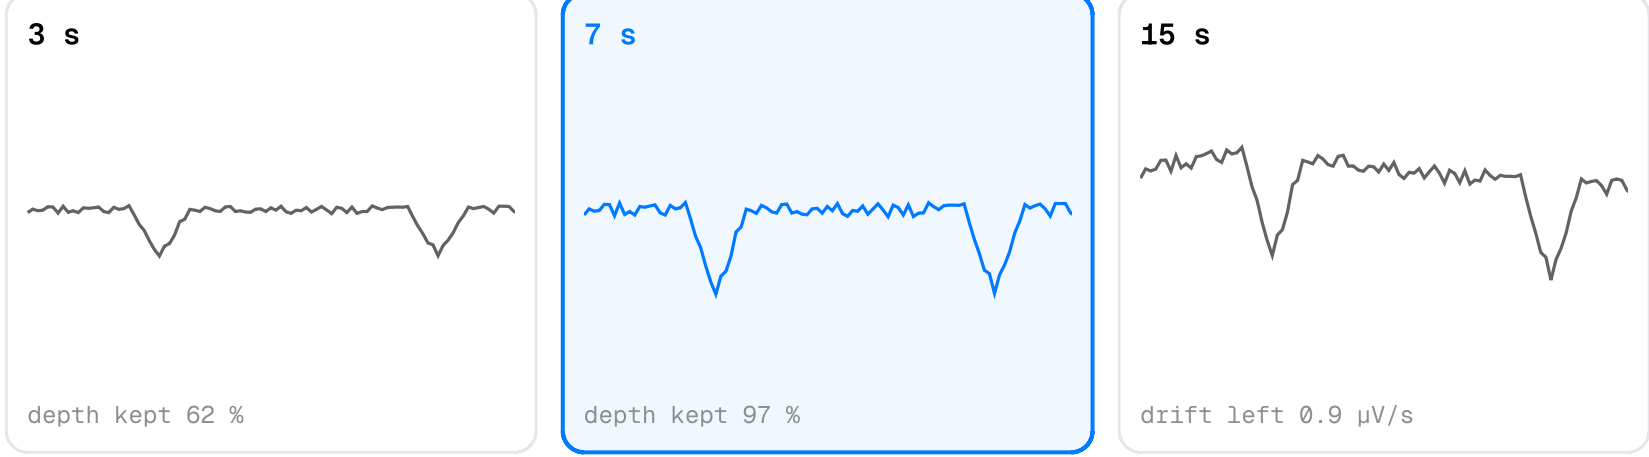

What this change does downstream

preview on cached span

02 Noise floor	slope noise σ	0.0112 → 0.00958 mV/s
04 Drop detection	raw detections	21 → 23
04 Drop detection	kept after dedupe	6 → 6
04 Drop detection	mean depth	0.27 → 0.31 mV

previews run on the cached span only · nothing is written until Apply

1 unapplied change window 5 → 7 s · re-runs 01 → 04 ≈ 0.9 s · 01 is cheap, so this would run automatically

Revert to recommended

Apply & re-run from 01