



Analyse

02 Threshold to spans set the cut against the surrogate · spans are what the next stage receives

Search spans, runs, families

Ctrl K

3 need you

M4 held out

< full chain

mp\_span\_CH4 run 14 · saved

Signal · CH4\_A2 · 6.0-12.0 h · 6 h

● null IAAFT 200×

≈ 4 min · local

Save template

Re-run 02

chain

Source  
- → Signal

cached

01 Matrix profile  
Signal → Scores

cached

02 Threshold to spans  
Scores → SpanSet

stale

+


Scores with the cut

matrix profile discords · 6-12 h of CH4\_A2 · drag the line




Scores over the null

real vs 200 circular shifts

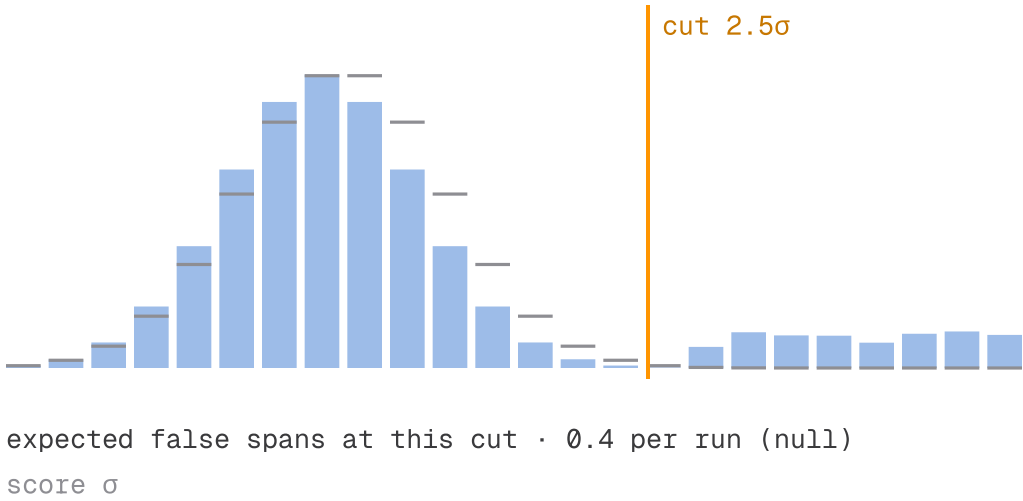

Spans vs cut

each point is a full run of this stage

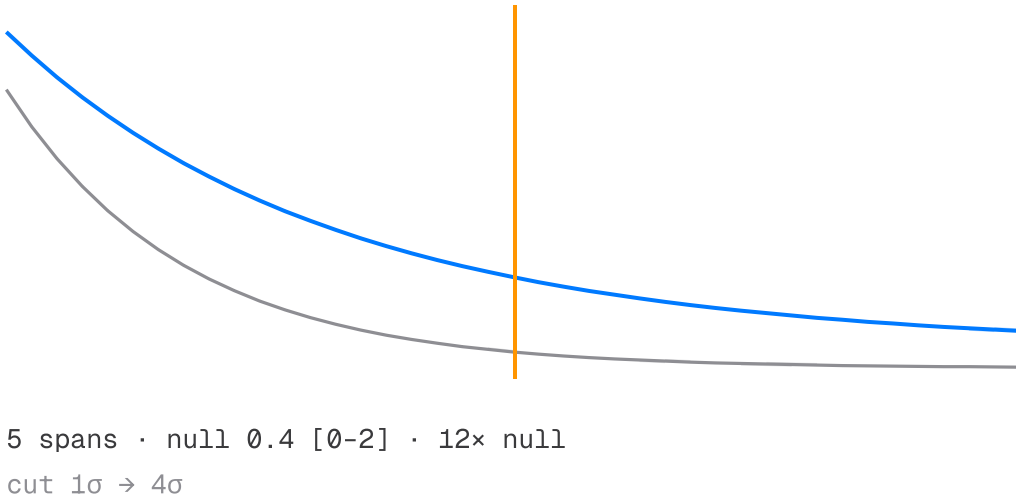

Parameters

keep scores

above the cut

cut

2.5σ · recommended (Settings > Analysis defaults)

min duration

60 s

merge gap

30 s

score scale

σ of this run's scores

Output 5

|              |               |
|--------------|---------------|
| spans        | 14            |
| 12×          | 0.4 [0-2]     |
| × null       | 35×           |
| 0.1 h of 6 h | 0.9 h of 24 h |

Next

SpanSet allows

Save template

Analyse events →

Pass 5 to Review →

Spans produced

5 · after min duration and merge

| start    | duration | peak score | merged from |
|----------|----------|------------|-------------|
| 6.24 h   | 140 s    | 3.41σ      | 2           |
| 7.39 h   | 80 s     | 3.02σ      | 1           |
| 11.52 h  | 9.15 h   | 3.55σ      | 3           |
| 16.21 h  | 60 s     | 10.33 h    | 1           |
| 20.10 h  | 90 s     | 2.96σ      | 10.42 h     |
| 1-5 of 5 |          |            |             |