



Analyse

02 Model stage a registered model scores each window · its calibration becomes the next stage's recommended cut

Search spans, runs, families

Ctrl K

3 need you

M4 held o

< full chain

spiketrain_cnn_CH4 run 14 · saved


Signal · CH4_A2 · 6.0-12.0 h · 6 h

● null label shuffle 200×

≈ 4 min · local


Save template

Run 02

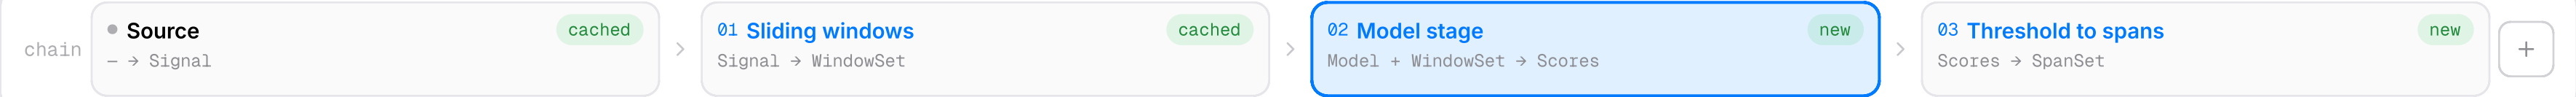

Windows scored over the signal

72 windows · 600 s · stride 300 s · 6-12 h of CH4_A2

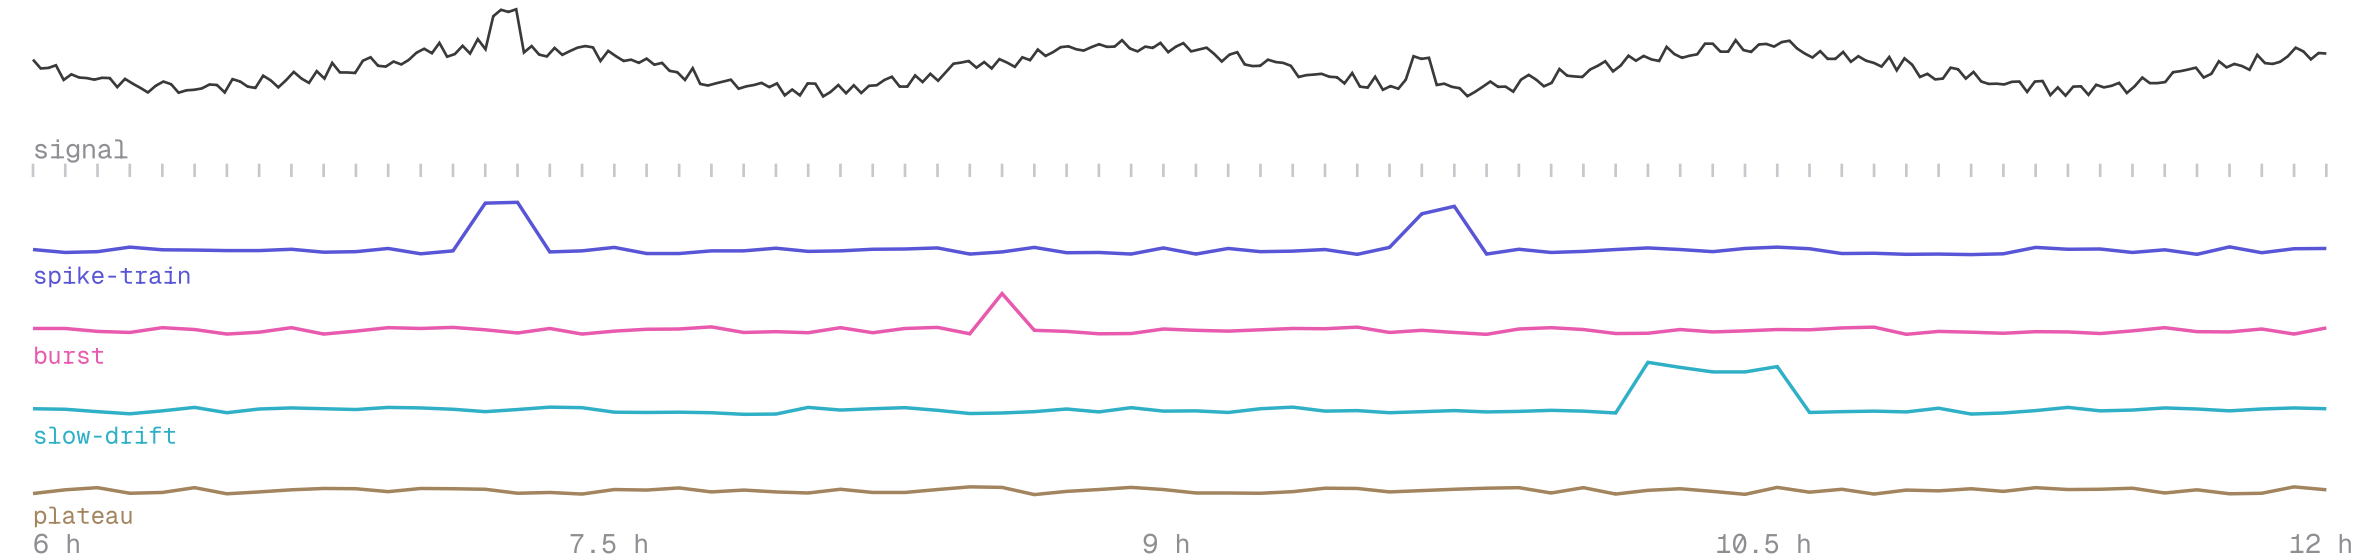

Model

registered only · picked in Parameters

name cnn_windows_v2 · manual · v2

registered 30 Aug · Models > Registry

classes spike-train · burst · slow-drift · plateau

test F1 0.66 on its held-out test block


trained on M2_aug fs1 · 3 ch · never these windows

calibration s-train 0.62 · burst 0.71 · s-drift 0.40 · plat 0.5

[Open in Models](#)

spike-train scores vs null

label-shuffle model, same windows

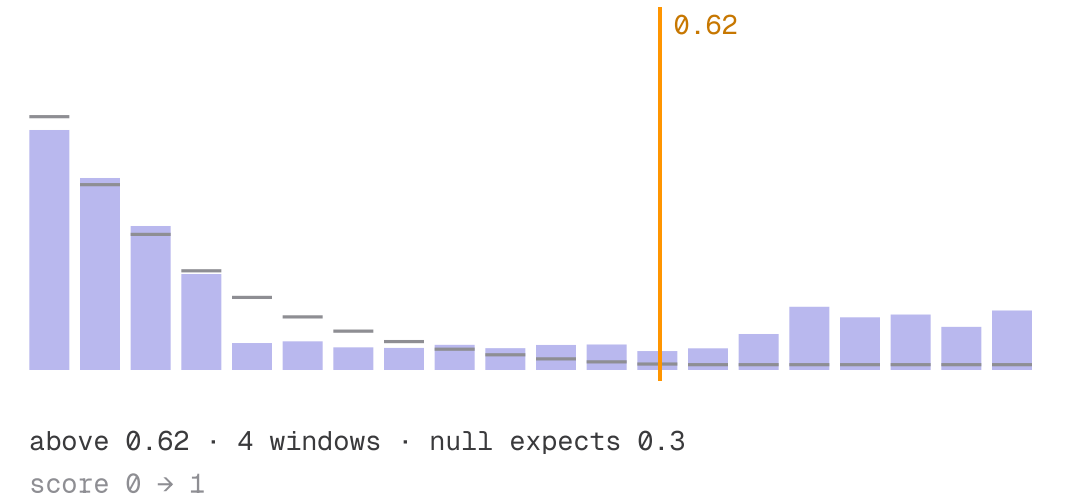

Parameters

model
cnn_windows_v2 · manual · v2 (registered)

windows from
01 Sliding windows · 600 s · stride 300 s

class to pass on
spike-train (all 4 tracks kept)

batch · device
64 · this machine

recommended cut for 03
0.62 · from calibration

Output

Scores

tracks 4 classes · 72 windows

estimate ≈ 40 s local · under 20 min

disk 0.1 MB scores

null label shuffle 200×

Next

Scores allows

Save template

Open model in Models

Insert Threshold · 0.62 →

Top windows by spike-train score

window	time	top class	score	2nd
w-15	7.25 h	spike-train	0.91	burst 0.06
w-44	9.67 h	spike-train	0.88	slow-drift 0.07
w-14	7.17 h	spike-train	0.79	burst 0.12
w-43	9.58 h	spike-train	0.72	plateau 0.14
w-30	8.50 h	burst	0.84	spike-train 0.10