



Analyse

Chain illustrative · windows from the human-labelled set · not built yet

Search spans, runs, families

Ctrl K

3 need you

M4 held out

cnn_windows_v3 unsaved

ws_human_labelled_mixed · CH4_A2 · 412 windows · interesting / not

null label shuffle

3 h 10 min

Save template

Train in Models

Source

cached -> WindowSet
412 windows · 38 % interesting




one tick per window · green interesting · grey not_interesting · sampled 160 of 412

+ insert

01 Window matrix

on cluster · cached + features
4 of 5 groups · CNN scores off

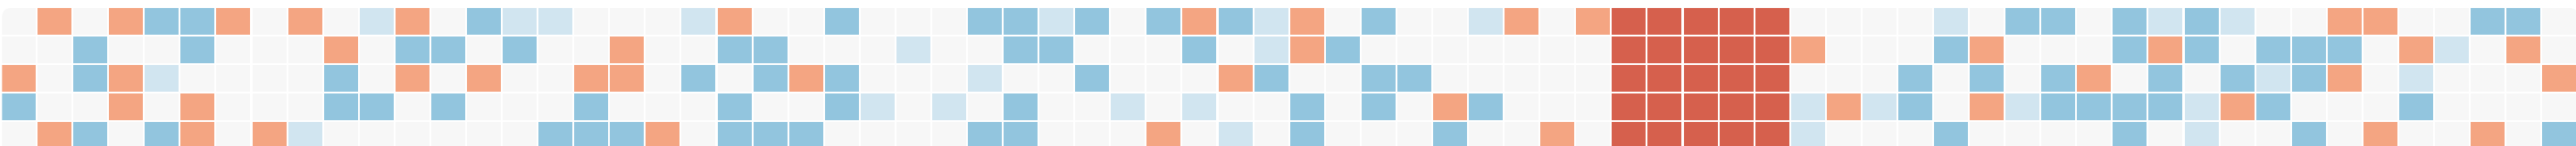

Catch22 · Entropy · Wavelet · CNN scores + RF excluded

+ insert

02 Cluster

cached WindowSet -> Grouping
average linkage · k 6




class per window across 412 windows

+ insert

03 Encode

stale WindowSet -> Encoding
GASF · GADF · RP · 224 px

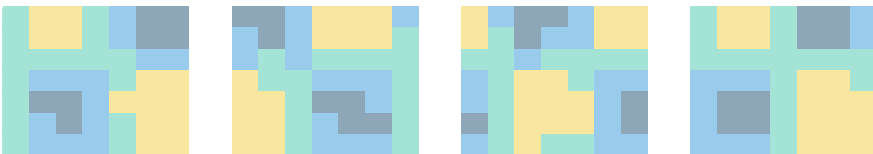

GASF

GADF

RP

fusion X

3 of 4 encodings ticked · 1,236 images · stale - cluster k changed

+ insert

04 Model

new Encoding + labels -> Model
EfficientNet-B0 · trained in Models



Every window already has a manual label — no review backlog

clusters are compared against verdicts the windows already carry · spans many channels, so it trains in Models

Train in Models



No sliding-windows stage, so no split stage — where does the blocked split go?

Open implementation question (backlog B7). Candidate: a split filter applied to the source windows themselves — blocked by recording and time, gap ≥ one window length, adjacent or overlapping labelled windows dropped at block edges.

backlog B7

terminal Model -> training template

412 windows · labels on every window

illustrative only · noted in the backlog as a future source type

illustrative · out of scope

Export run