



Analyse

05 Model build the training template · trial it here · train it in Models

Search spans, runs, families

Ctrl K

3 need you

M4 held out

< full chain

cnn_windows_v3 unsaved


Signal · CH4_A2 · span 0-45.2 h

null label shuffle

trial ≈ 2 h 40 on cluster

Save template

Train in Models

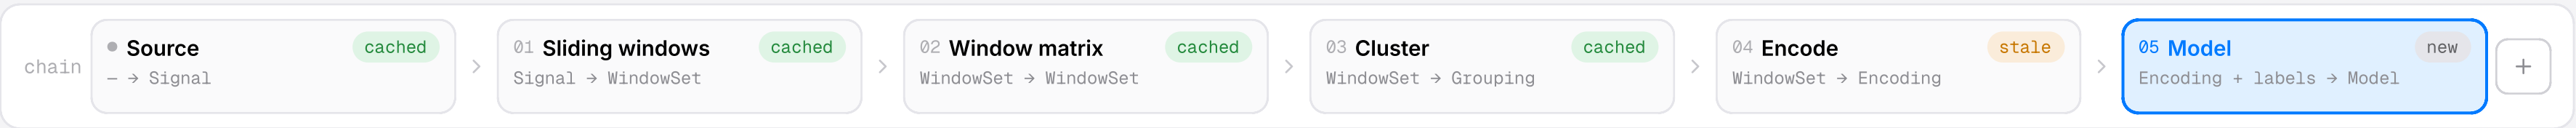

05 Model Encoding + labels → Model tick the stages the trial job runs

stage	status	cost	runs on	
01 Sliding windows	cached	< 1 s	–	reused from cache
02 Window matrix	cached	14 min	cluster	reused · recipe prefix a7f3
03 Cluster	cached	40 s	local	skipped · labels read from cache
04 Encode	stale	6 min	cluster	rebuilds 1,629 images
05 Train model	new	2 h 40	cluster · GPU	EfficientNet-B0 · 30 epochs

labels from

cluster classes 6 classes from 03 · all 543 windows

manual verdicts binary · 131 reviewed windows only

both, paired same split and test set – runs in Models

Training

architecture EfficientNet-B0

input GASF + GADF + RP · 224

epochs 30 · early stop

stop on val balanced acc.

learning rate 3e-4 · cosine

batch · seed 32 · 17

class balance inverse-frequency weights

augmentation time shift ± 10 %

held out: M4_aug · locked in Settings > Datasets

Before this trains

- split is blocked by time with a 10 min gap (01)
- label-derived CNN features excluded from 02 → 03
- held-out recording locked · linked fs1 / fs2 never split
- 1,629 images – well under the ~10,000 a CNN on encodings usually needs
- C5 and C6 have under 20 windows per split – merge or raise the cut
- manual-verdict arm has only 131 windows – 412 still unreviewed

Merge C5 + C6 in 03

Send 412 to Review

Trial job · this channel only stages 04 → 05 · one GPU task template guided · uob-bc4

```
#SBATCH --job-name=ub_train_cnn_windows_v3 --gres=gpu:1 --time=04:00:00 --mem=32G
python -m pipeline.run --recipe c9e2...41 --from-stage 04 --to-stage 05 \
  --artifacts ./artifacts --manifest cluster_out/manifest.json
```

results return via Jobs > Manifest inbox

Copy script

Download trial job

Train the real model in Models applies this template across channels and recordings · paired comparison · results and nulls

Train in Models