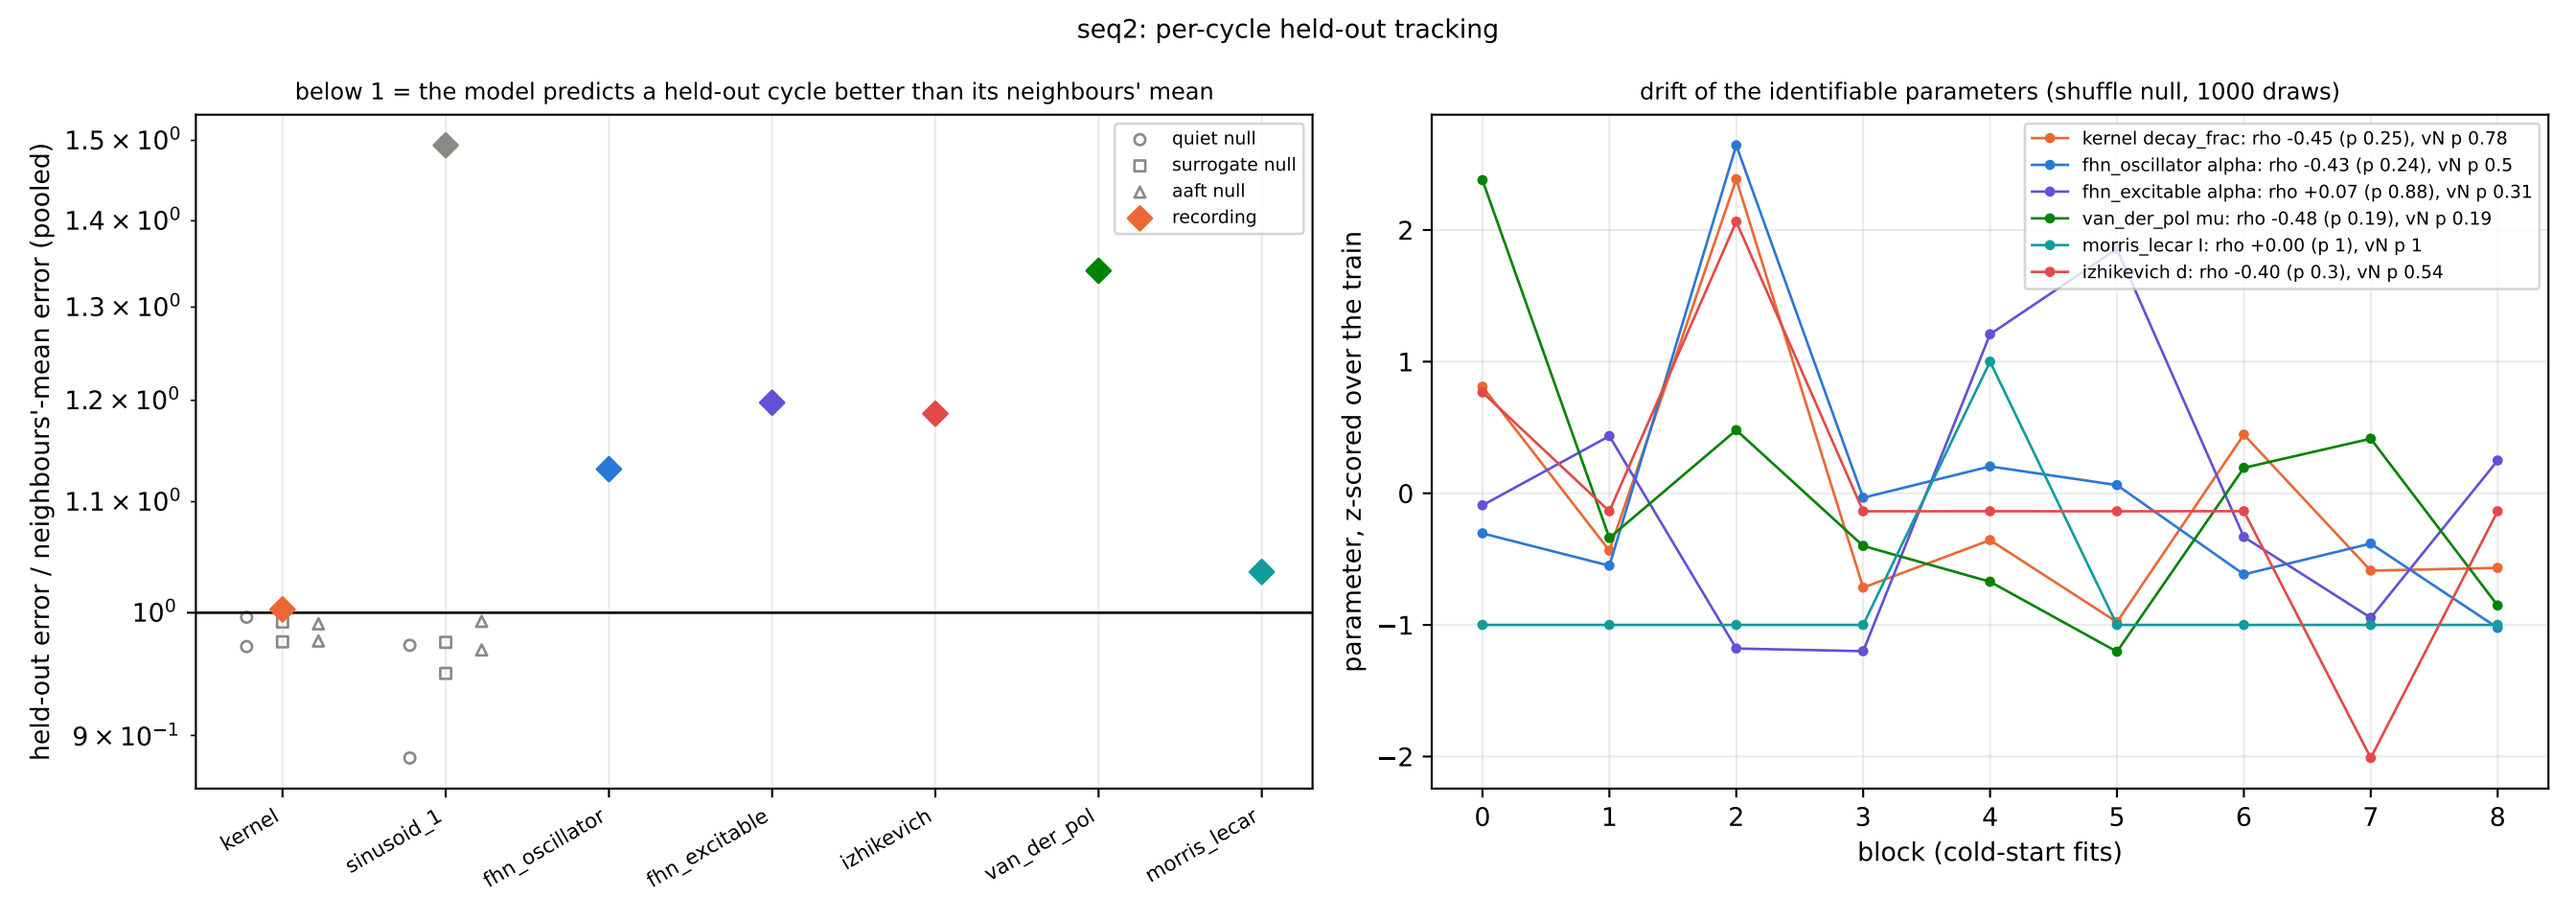
seq2: per-cycle held-out tracking
below 1 = the model predicts a held-out cycle better than its neighbours' mean
held-out error / neighbours'-mean error (pooled)
quiet null
surrogate null
aaft null
recording
kernel
sinusoid_1
fhn_oscillator
fhn_excitable
izhikevich
van_der_pol
morris_lecar
drift of the identifiable parameters (shuffle null, 1000 draws)
parameter, z-scored over the train
block (cold-start fits)
kernel decay_frac: rho -0.45 (p 0.25), vN p 0.78
fhn_oscillator alpha: rho -0.43 (p 0.24), vN p 0.5
fhn_excitable alpha: rho +0.07 (p 0.88), vN p 0.31
van_der_pol mu: rho -0.48 (p 0.19), vN p 0.19
morris_lecar I: rho +0.00 (p 1), vN p 1
izhikevich d: rho -0.40 (p 0.3), vN p 0.54