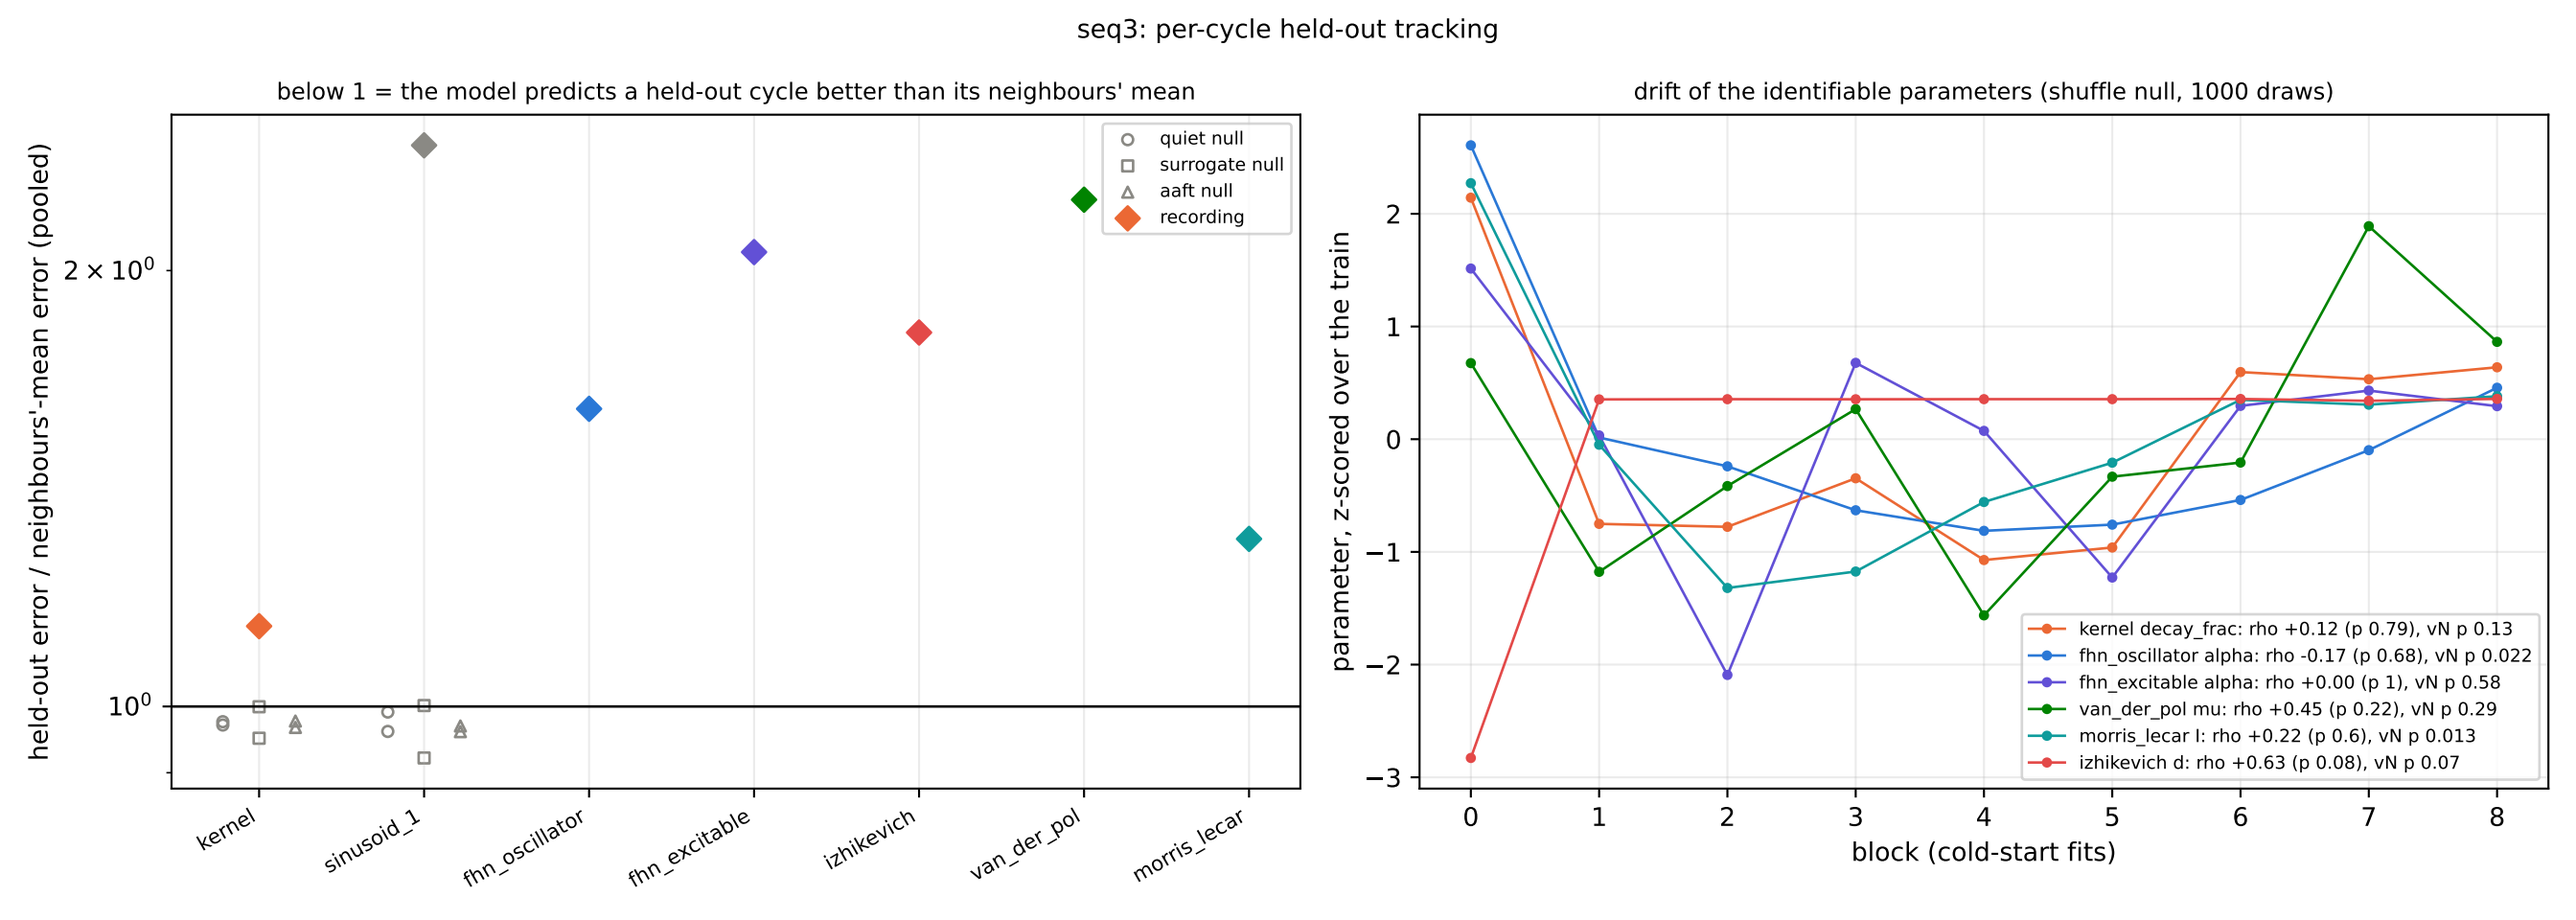
seq3: per-cycle held-out tracking
below 1 = the model predicts a held-out cycle better than its neighbours' mean
held-out error / neighbours'-mean error (pooled)
2×10^0
10^0
quiet null
surrogate null
aaft null
recording
kernel
sinusoid_1
fhn_oscillator
fhn_excitable
izhikevich
van_der_pol
morris_lecar
drift of the identifiable parameters (shuffle null, 1000 draws)
parameter, z-scored over the train
block (cold-start fits)
kernel decay_frac: rho +0.12 (p 0.79), vN p 0.13
fhn_oscillator alpha: rho -0.17 (p 0.68), vN p 0.022
fhn_excitable alpha: rho +0.00 (p 1), vN p 0.58
van_der_pol mu: rho +0.45 (p 0.22), vN p 0.29
morris_lecar I: rho +0.22 (p 0.6), vN p 0.013
izhikevich d: rho +0.63 (p 0.08), vN p 0.07