

App Detail

Polish round mockup and annotated token contract. Nothing in the mock is portable to XAML except the dotted token names and the layout decisions recorded here. This document is the contract for re-implementation.

Screen	App Detail · deepest drill state. Reached from Per-App by double-clicking a row.
XAML file	src/ZenVizor.Ui/Views/AppDetailPage.xaml (+ .xaml.cs)
IA placement	Not a nav-rail item. Back affordance returns to Per-App via <code>NavigationView.GoBack()</code> .
Theme	Light + dark, equal weight. Cards opaque <code>surface.card</code> over Mica.
New tokens	None. Two pointer renames only (see Hand-off notes, last page).

PRE-HANDBACK CHECKLIST · CONFIRMED

- ✓ **Token annotations.** Every region labeled with canonical dotted names (annotated reference on its own page). No raw hex, no legacy aliases.
- ✓ **State coverage.** All §4 states rendered: default, alert combination, loading, empty (chart / connections / sessions), disconnected, error. One steady state additionally in dark.
- ✓ **New tokens.** None introduced.
- ✓ **New patterns.** Declared (Trust line, identity summary block, tabbed grid card, comprehension info-popover) · see Patterns page.
- ✓ **Layout / density / scroll hints.** Inline on each surface and consolidated on the Layout page.
- ✓ **Copy strings.** Delivered inline with the surface that paints them (each state page) and consolidated on the Copy page.
- ✓ **Variant selection.** Q1–Q6 selections declared on the next page.

Variant decisions · §8.4

The open questions and the selected direction. Claude Code implements the selected column only.

QUESTION	SELECTED DIRECTION	NOTES / REJECTED ALTERNATIVES
Q1 Summary layout	Scannable identity block selected Publisher · Signature on a label/value row; large mono Up / Down totals on the right; full untruncated path on its own line.	Replaces the two pipe-separated paragraphs. Aggregation grain field dropped (inferable from chart). Rejected: 3-cell KPI strip (too heavy for metadata).
Q2 User-writable framing	Dedicated Trust line selected A verdict sentence that reads the signature + writable-path combination in plain words.	Amber status.caution band only in the alert combination; neutral surface.subtle "signed by a verified publisher" otherwise. Never cries wolf on signed-from-personal-folder.
Q3 Back affordance	Breadcrumb above the title selected < Per-App as a caption-weight link, page title (image name) below it.	Subordinate to the title; unambiguous hierarchy. Rejected: shoulder-to-shoulder inline row (the current conflation).
Q4 Appld placement	Labeled record chip by the title selected APP ID 2 eyebrow + mono value + copy button.	Visible and labeled; out of the title text and out of tooltips. Lives beside the title, not inside it.
Q5 Grids presentation	Tabbed card, comfortable density selected Connections / Recent sessions share one card with a tab switch.	Humanized headers + Port→service captions + per-card info popover for comprehension. WAN/Local pills via chart.wan / chart.local . Alternating row shading, no divider lines. Side-by-side / stacked explored and rejected.
Q6 Loading affordance	Per-surface rings selected One ring in the chart body, one in the grid card. Summary values render en-dash placeholders.	Ring + "Loading..." caption after ~1s. Rejected: single page-level overlay.

REF **Every region → canonical token**

The default state with the token-annotation overlay on. Each dotted name is the DynamicResource key Claude Code binds. No raw hex, no legacy aliases (--fgl / --fill-card / --series-up).

Dashboard

Per-app

History

Reports

Alerts

2

ui.Button · ChevronLeft20 + "Per-App" · GoBack()

text.eyebrow + text.mono · Labeled record id

surface.card · border.card · radius.card

Google LLC

Signed

Signed by a verified publisher

surface.subtle · border.subtle (neutral, not warning)

Runs from a personal folder (your %LOCALAPPDATA%), which is normal for apps that update themselves, like Chrome. The valid signature is what matters here.

text.mono · TextTrimming=None (never truncates)

C:\Users\mitch\AppData\Local\Google\Chrome\Application\chrome.exe

radius.control
Window 24htext.mono · chart.upSeries / downSeries
Up · this window Down · this window
43.0 MB 545 MB

surface.card

Traffic over time

per-minute detail · last 24 hours

chart.legend.text
Up Down

surface.card · radius.card

Connections 6

Recent sessions 4

①


Protocol	Remote endpoint	Port	Reach	Up	Down
TCP	142.250.80.110	443 HTTPS	WAN	31.8 MB	402 MB
UDP	2607:f8b0:4006:80a::200e	443 HTTPS	WAN	7.4 MB	96.5 MB
TCP	34.120.115.90	443 HTTPS	WAN	2.1 MB	33.0 MB
UDP	224.0.0.251	5353 mDNS	Local	15.4 KB	181 KB

Settings

Service: connected · 0.1.0+ce702604 · proto 1.0

42.9 KB/s 6.7 KB/s

state: default **Steady state · Chrome, tabbed grids**

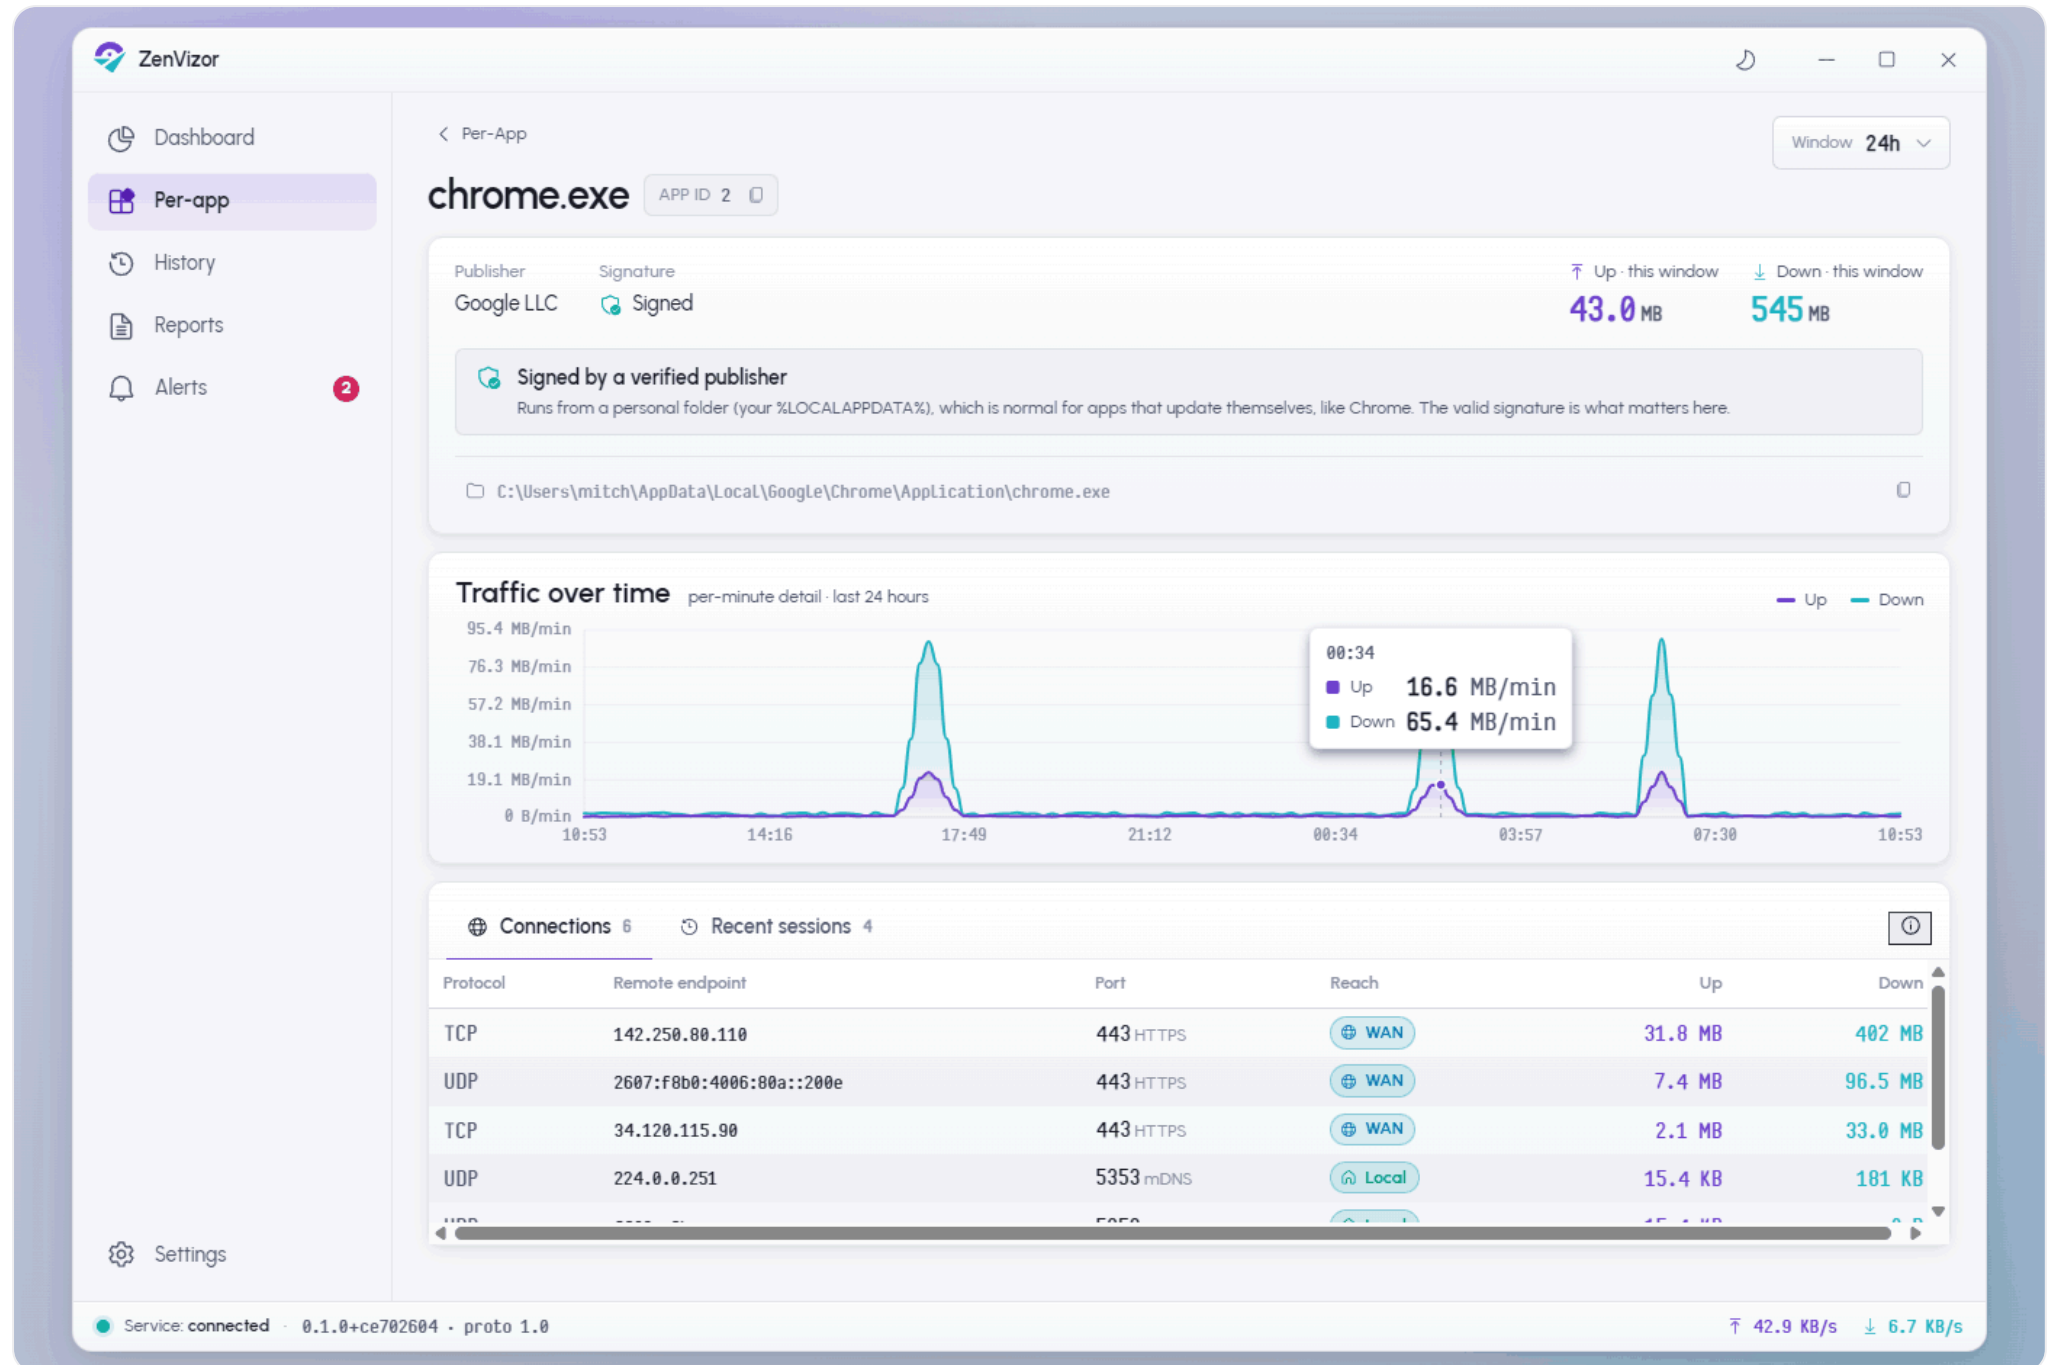

Signed app from a personal folder (benign user-writable). Samples grain → line series. Tooltip shown active so the opaque background + drop shadow + per-series rows are auditable.

```
surface.card  border.card  radius.card  text.mono  chart.upSeries
chart.downSeries  chart.gridline  chart.axis.label
```

Back · ui.Button · ChevronLeft20 + "Per-App" · GoBack()


AppId · labeled chip · text.eyebrow + text.mono + copy

Window · ComboBox · shorthand 24h · long-form ToolTip

Grids · tabbed · Protocol · Endpoint · Port · Reach · Up · Down

Trust · neutral · signed/personal folder

state: default · alert combination **Unsigned + user-writable + connections**

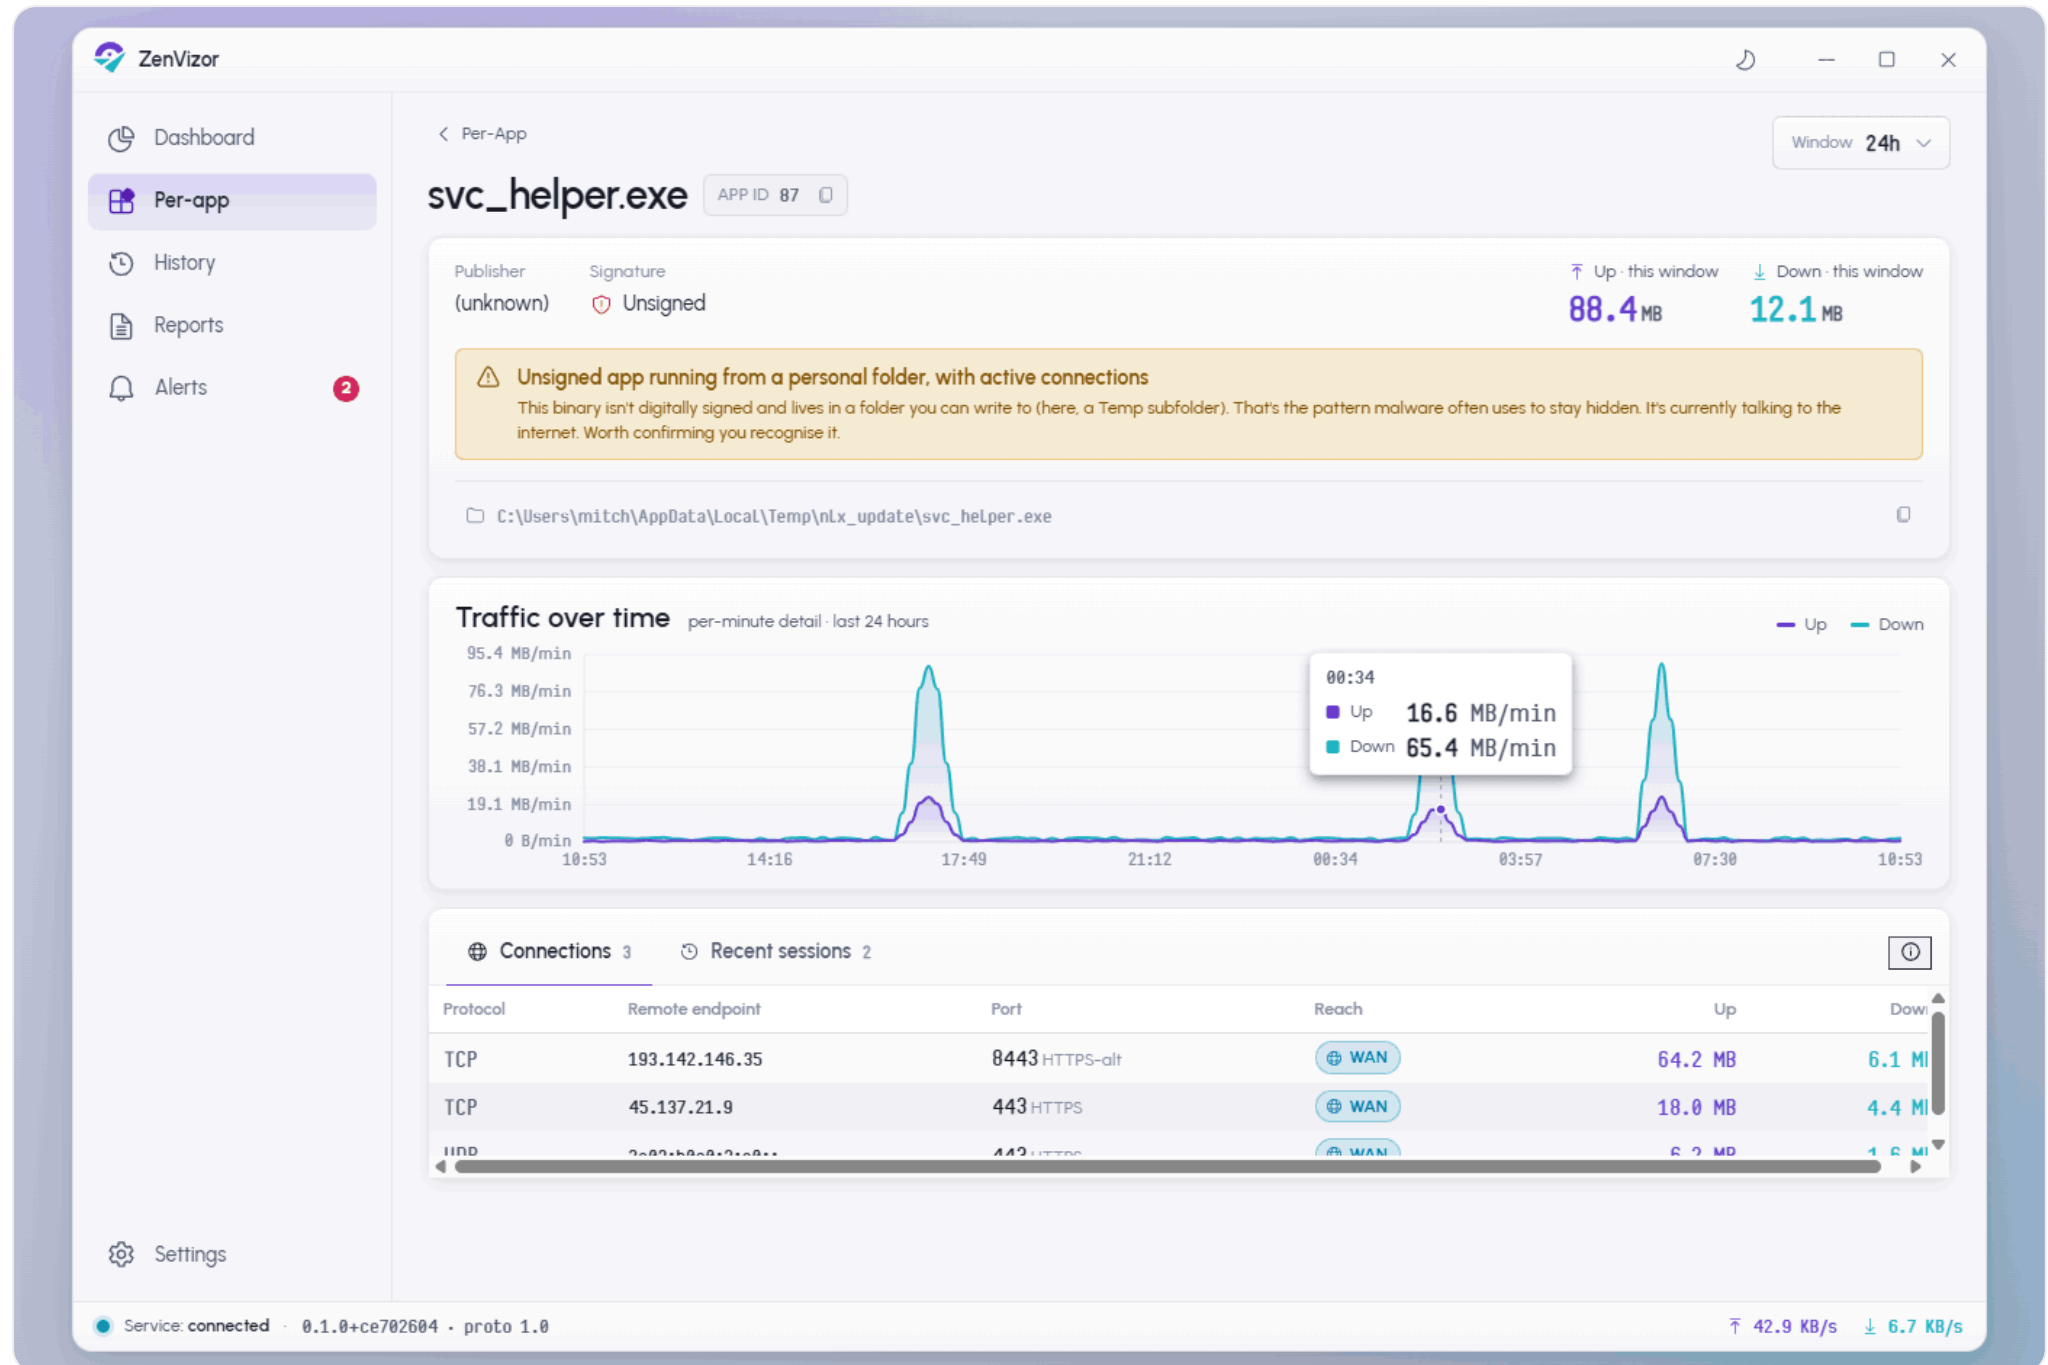


The high-importance combination. Trust line escalates to an amber caution band that states the verdict in plain words. Connections carries WAN rows (the "has connections" condition). Same chrome as default · proves the elevation reads as warning, not panic.

```
status.caution.background  status.caution.text  chart.wan  text.mono
```

Signature · Unsigned · shield_error · status.critical
Trust · ALERT band · status.caution.*
Path · %TEMP% subfolder · text.mono, untruncated
Condition · IsUserWritablePath && Signature ∈ {Unsigned,Invalid} && has WAN connection

state: default · Hourly grain **svchost · stacked columns + hosted services**

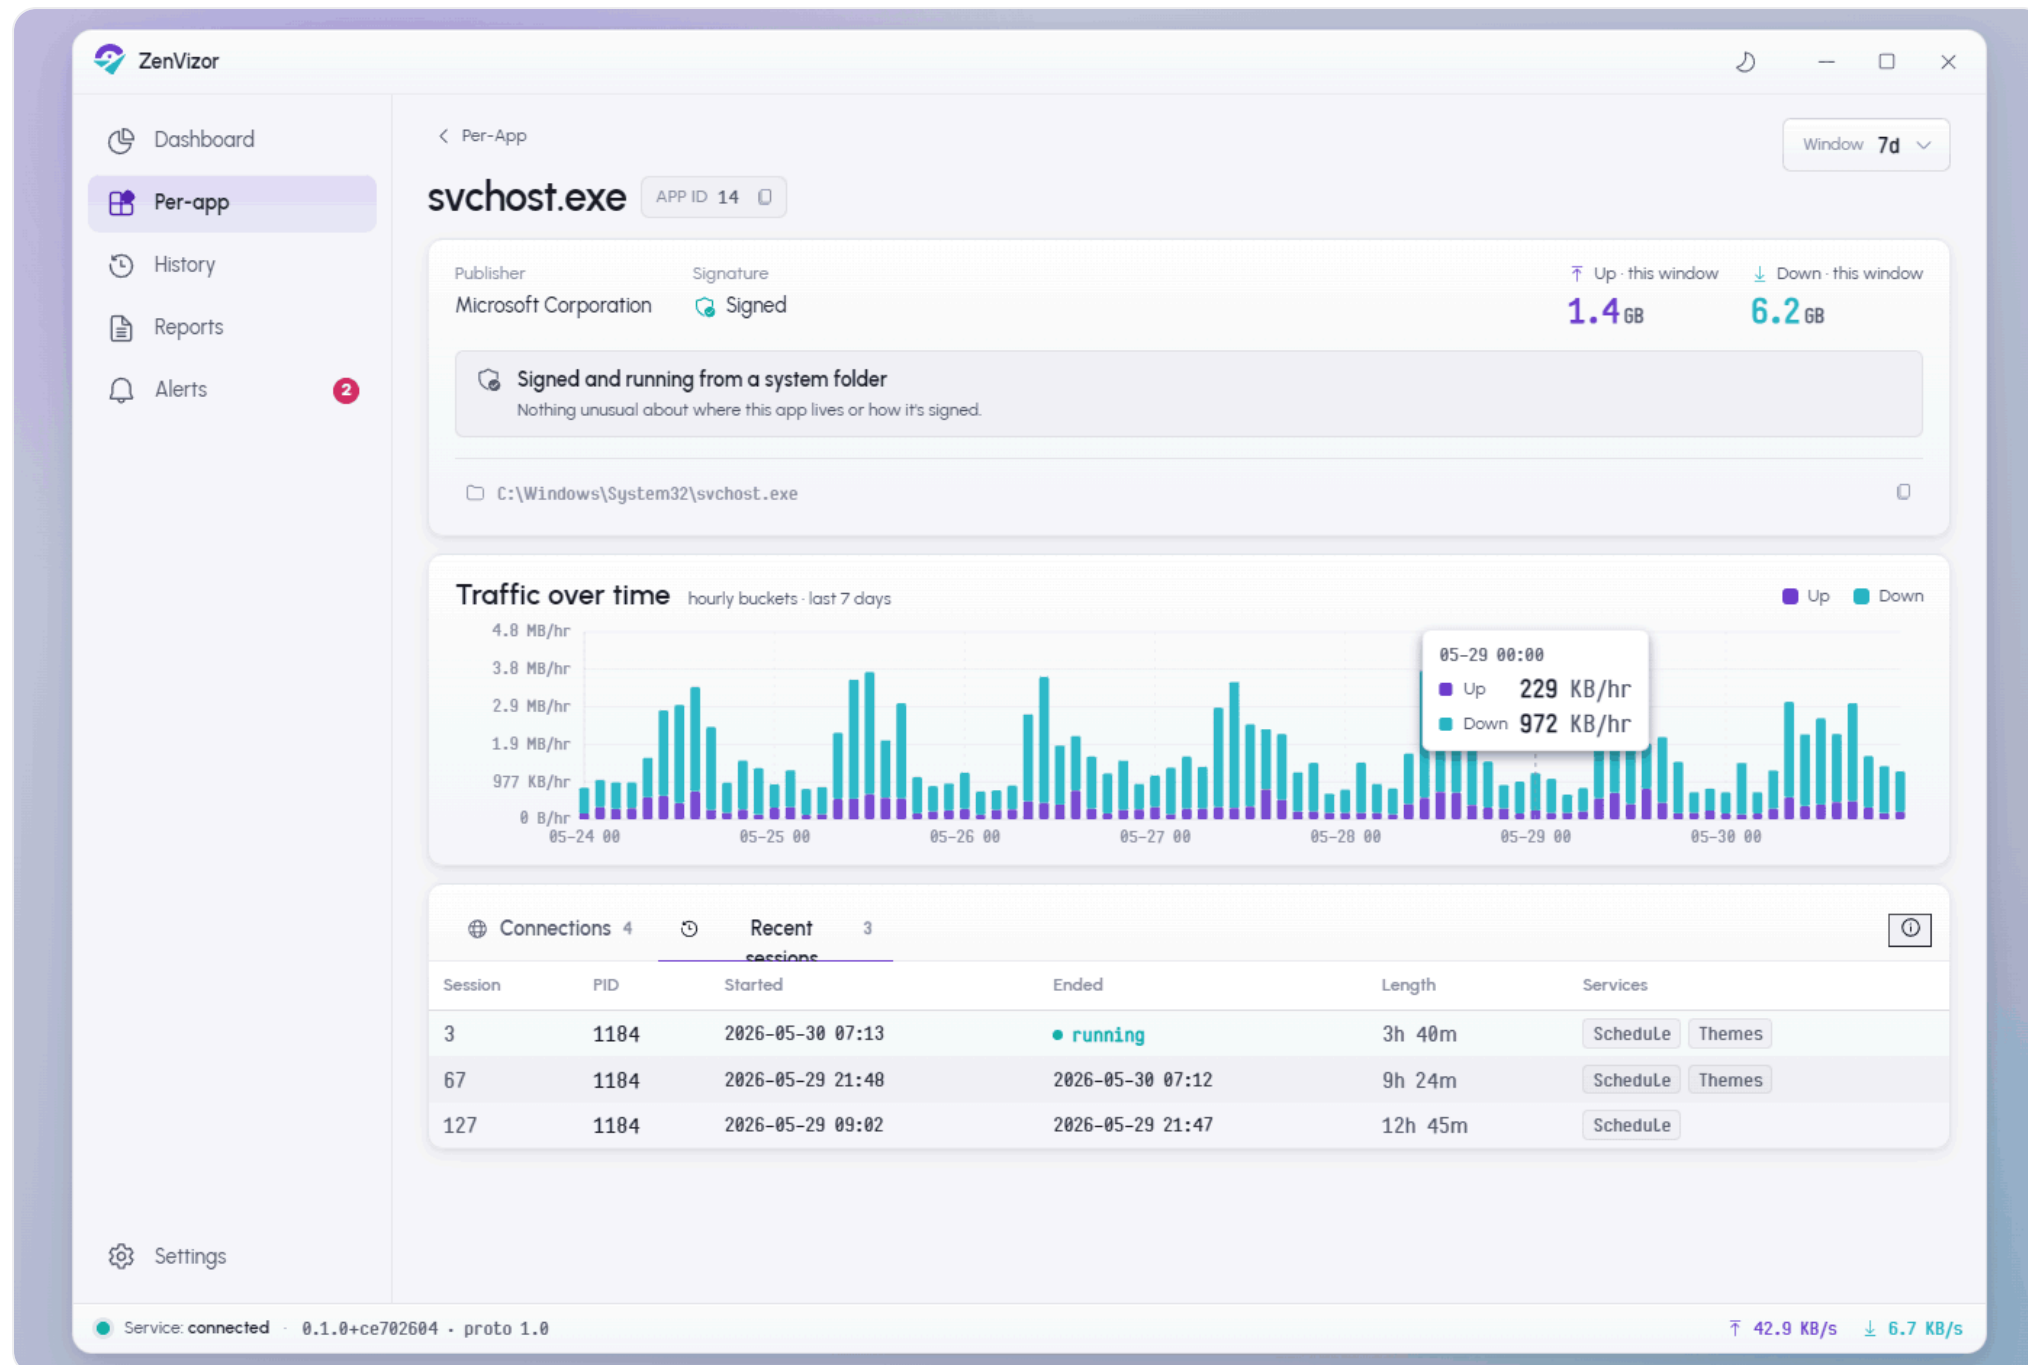

Multi-day window (7d) → Hourly grain → stacked column series (Up bottom, Down top). X axis uses the day-boundary format MM-dd HH. Sessions tab shows the Length column and HostedServices tags for an svchost PID.

`chart.upSeries` `chart.downSeries` `surface.subtle.alt` `text.mono`

Chart · StackedColumnSeries · Up bottom / Down top

X axis · MM-dd HH · dashed day-boundary cue

Y axis · /hr suffix (grain-adaptive)

Sessions · Length column · Services tags (Schedule, Themes)

state: loading **Loading · per-surface rings**

 ZenVizor

 Dashboard

 Per-app

 History

 Reports

 Alerts 2

 Settings

< Per-App

chrome.exe

APP ID - 

Window 24h

Publisher	Signature	Up · this window	Down · this window
-	-	-	-
-	-	-	-

Traffic over time


Loading...

 Connections 6

 Recent sessions 4




Loading...

Service: connected · 0.1.0+ce702604 · proto 1.0

Up 42.9 KB/s

Down 6.7 KB/s

Three independent surfaces refresh in parallel. Summary values render en-dash placeholders in text.mono / text.tertiary. Chart body and grid body each show a centered ProgressRing with a "Loading..." caption. No skeleton shimmer.

accent.default text.tertiary text.secondary


Summary · placeholder – in text.mono / text.tertiary

Chart · centered ProgressRing + Loading...

Grid · centered ProgressRing + Loading...

Lock · static ProgressRing only, no shimmer

state: empty · chart no traffic **Window has zero traffic**

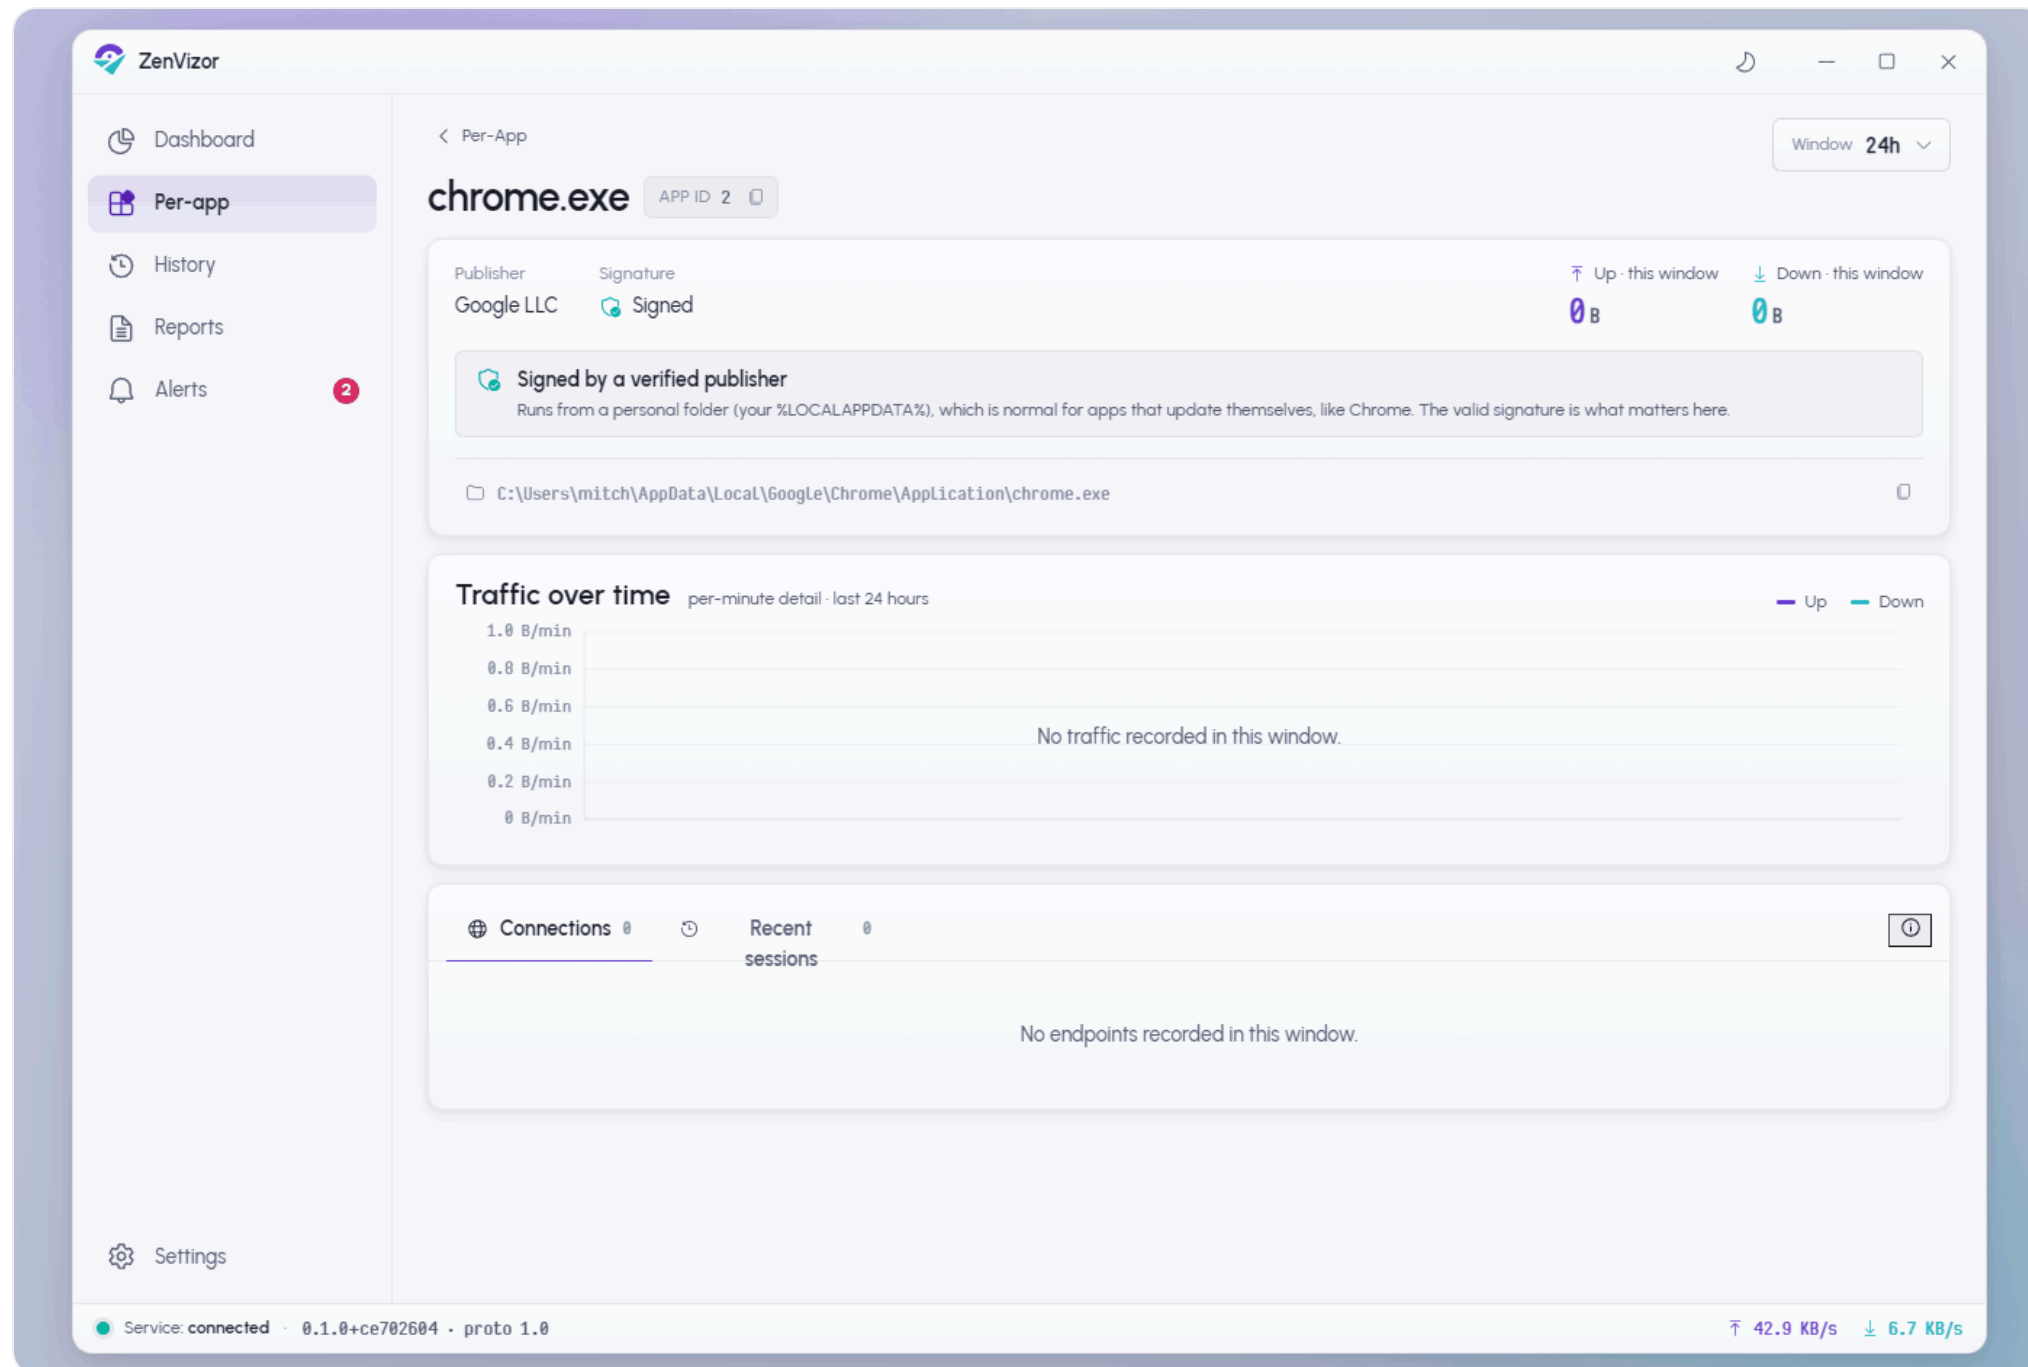

Query succeeded; the window simply has no traffic. Summary stays filled (app metadata is known); window totals render 0 B (genuinely zero, not a dash). Chart shows the centered no-data overlay. Grids commonly empty too in this state.


`text.secondary` `surface.card`

Totals · 0 B / 0 B (not a dash · genuinely zero)

Chart · No traffic recorded in this window.

Overlay · `text.body` · `text.secondary` · `IsHitTestVisible=False`

state: empty • connections grid **No endpoints this window**

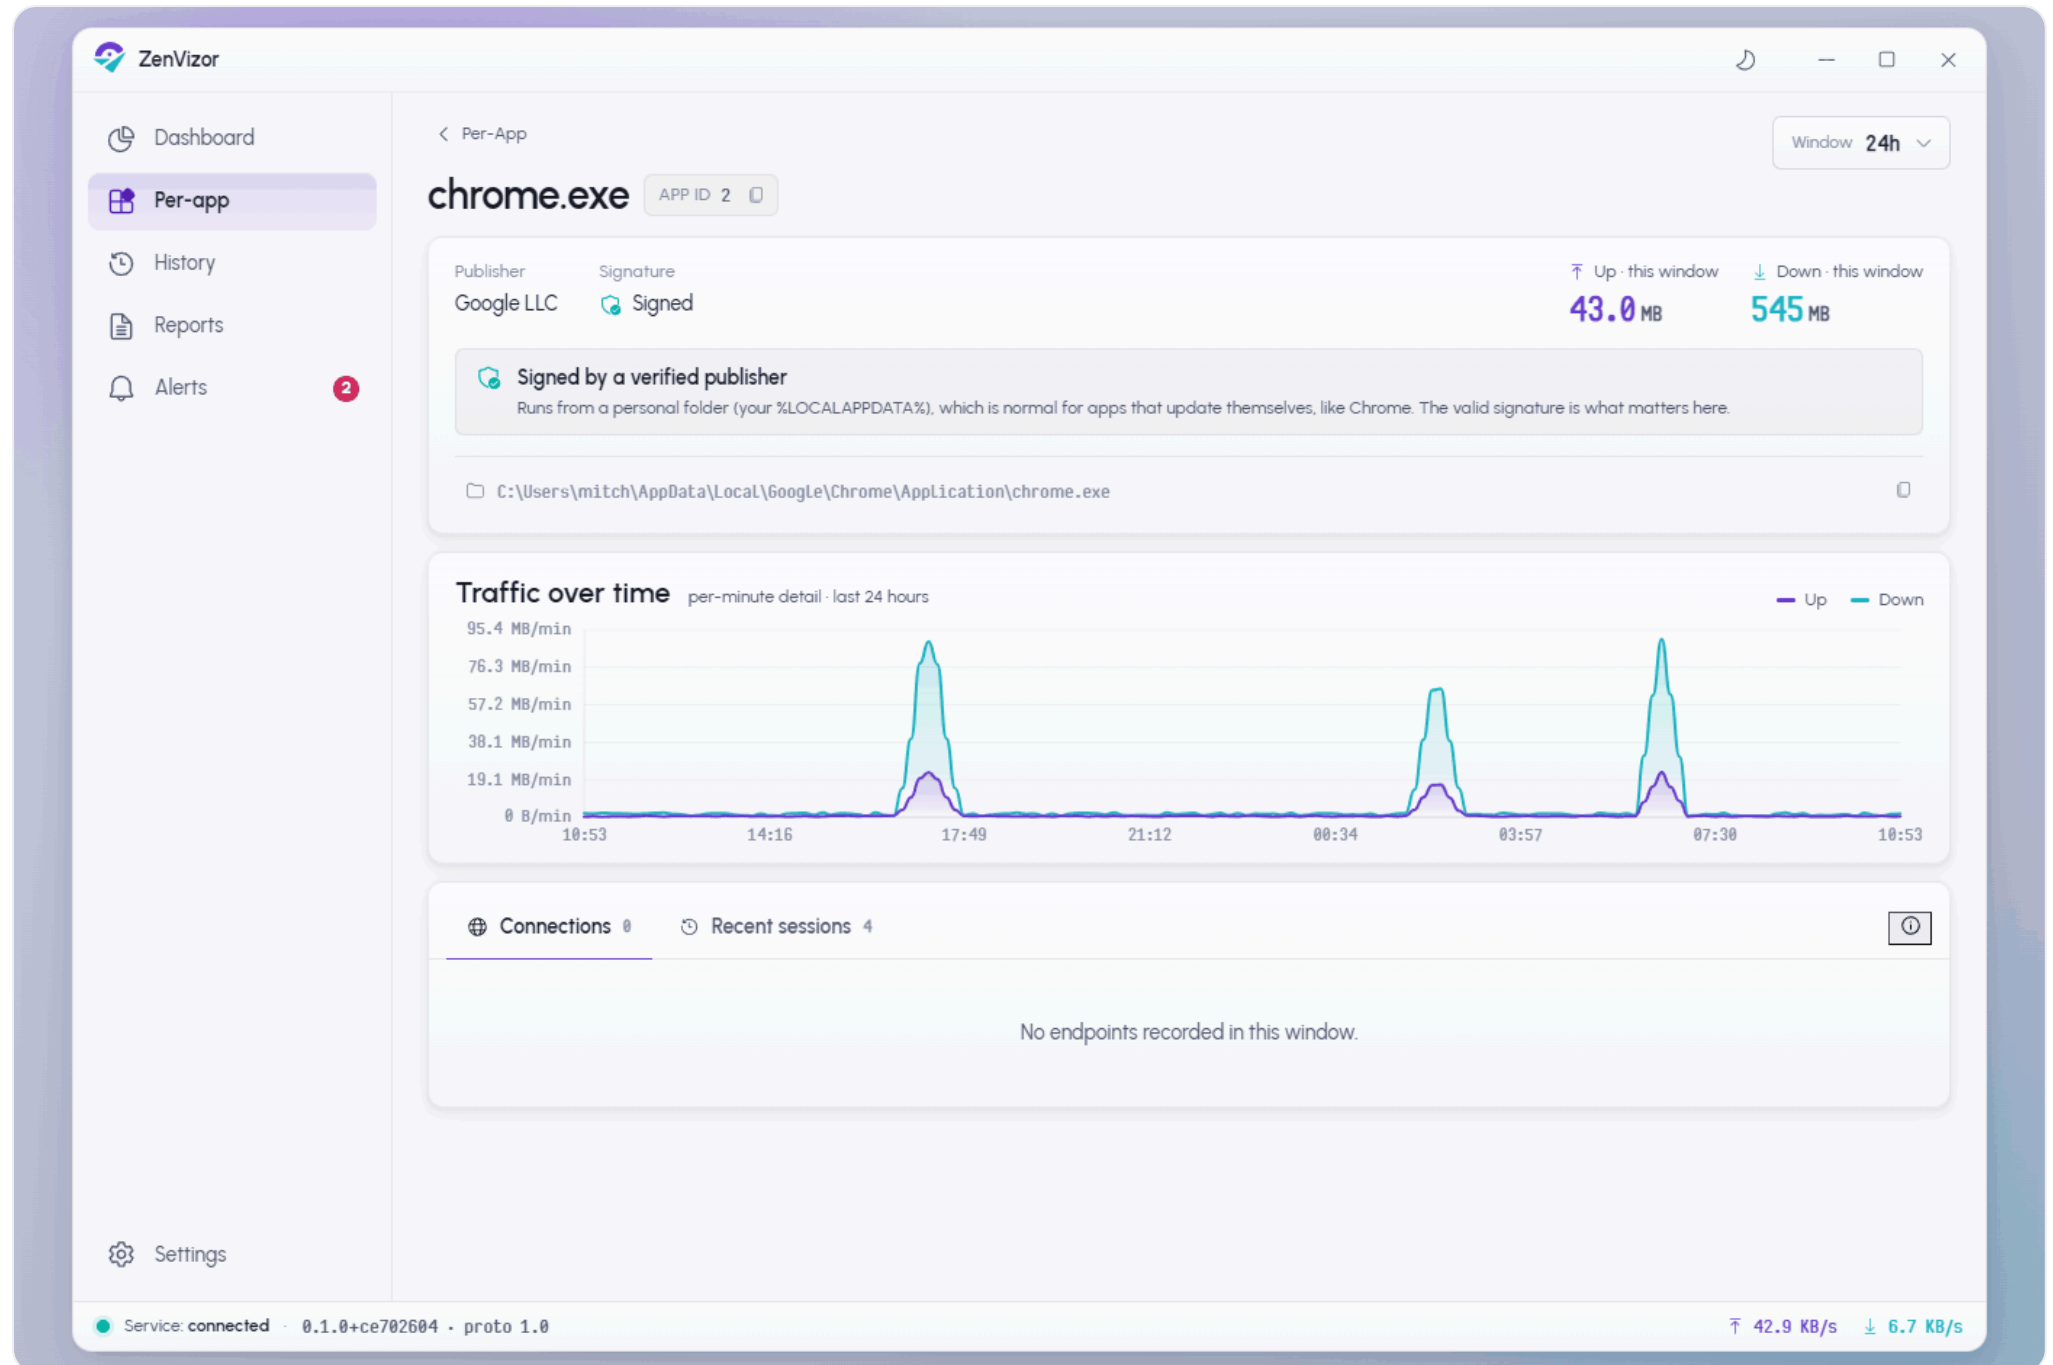


Sub-state. Connections tab body renders the centered empty copy; other surfaces unchanged. Connections and Sessions can independently be empty.

text.secondary

Copy · No endpoints recorded in this window.

Style · text.body · text.secondary, centered

state: empty • sessions grid **No sessions this window**

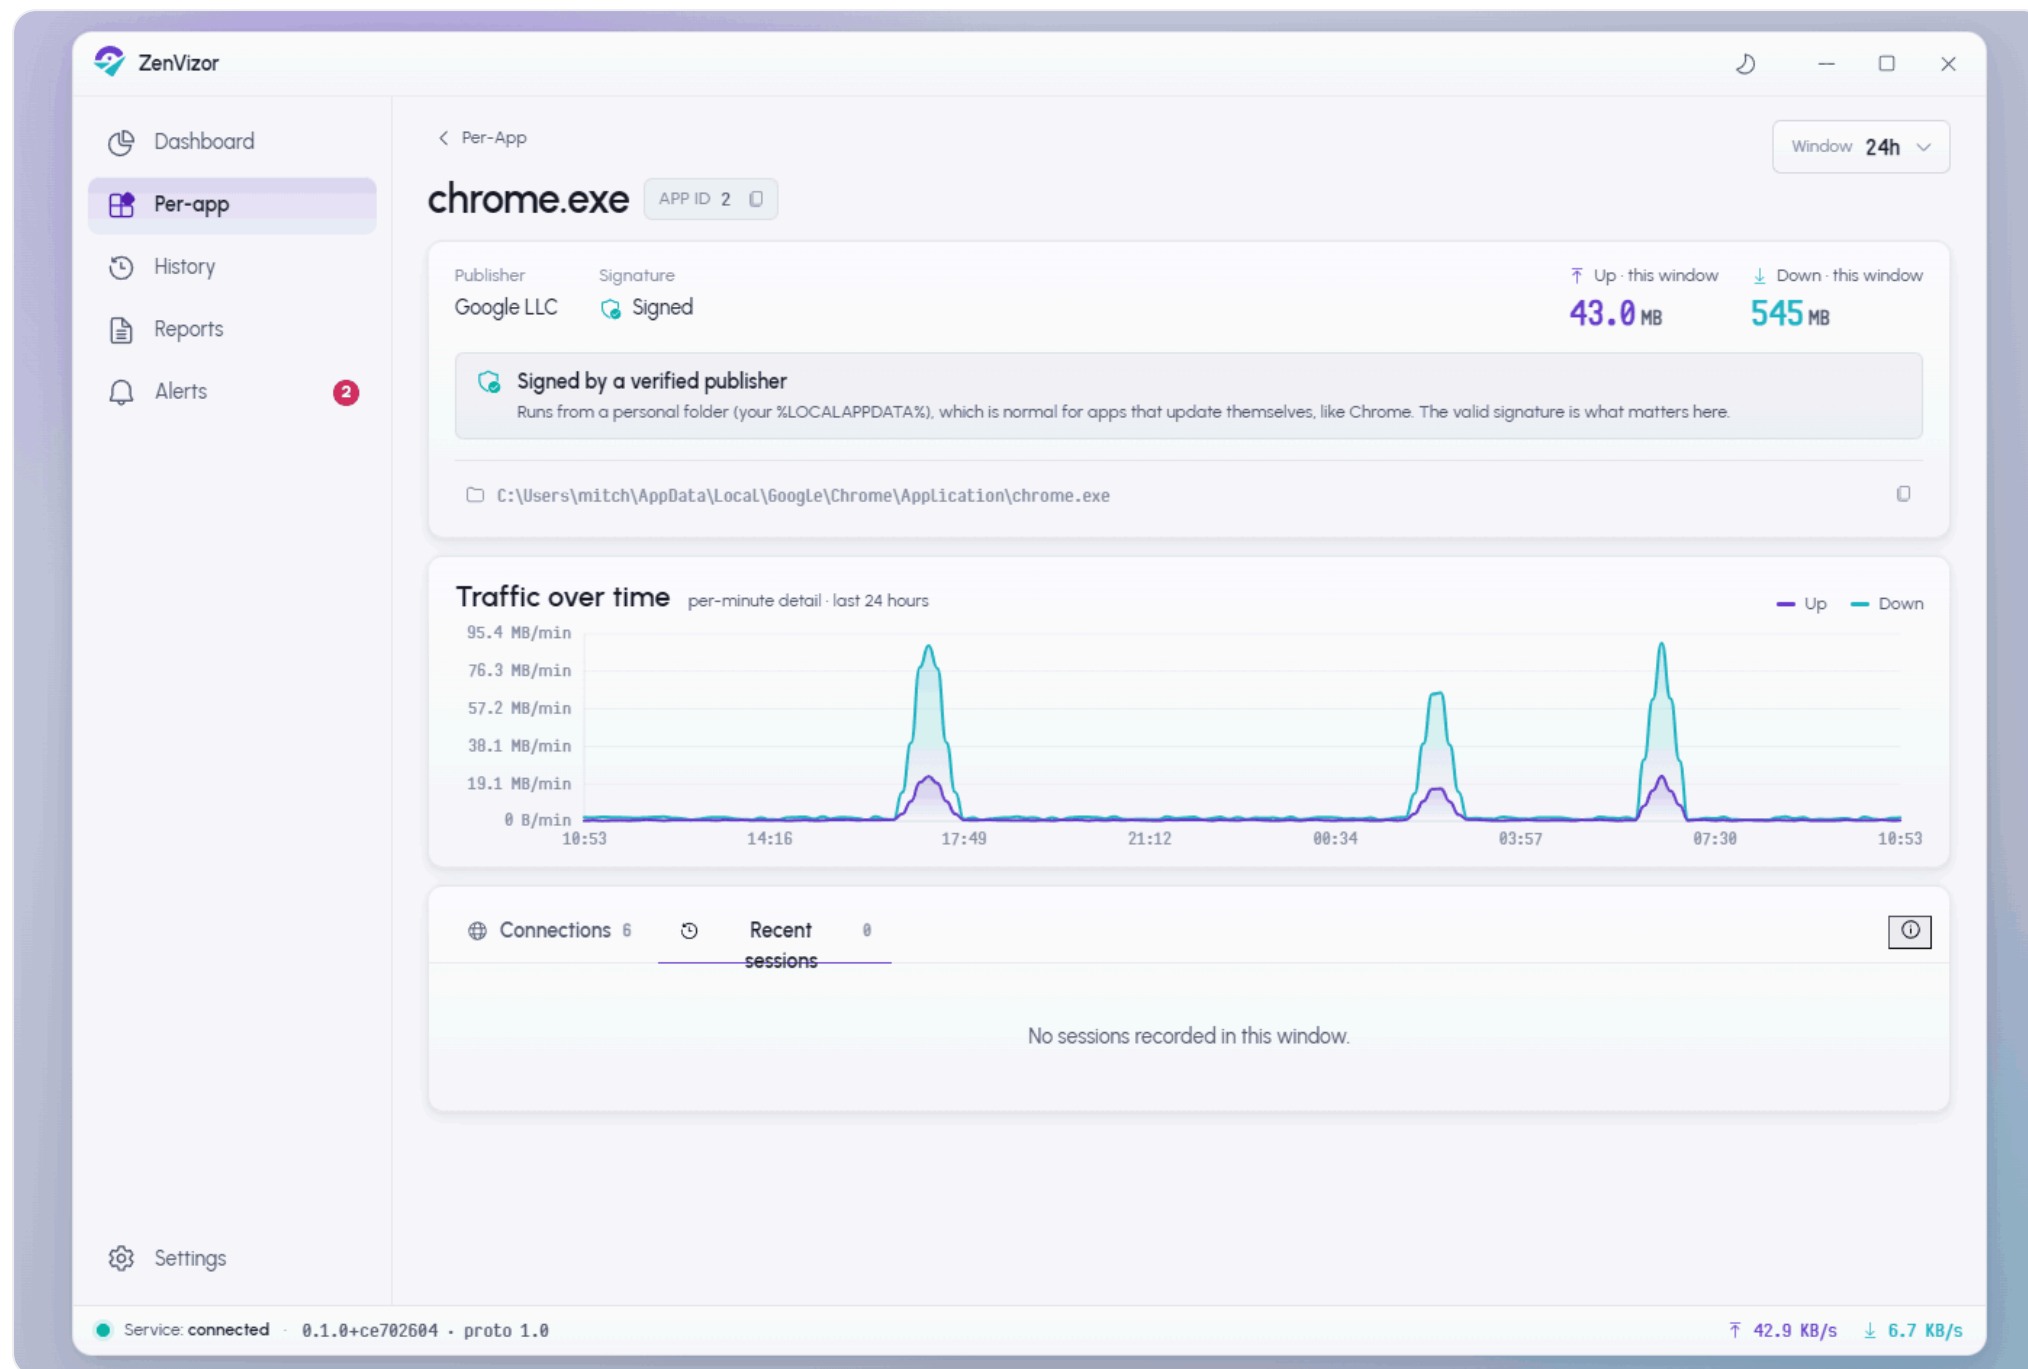


Sub-state. Recent sessions tab body renders the centered empty copy; other surfaces unchanged.

text.secondary

Copy · No sessions recorded in this window.

Style · text.body · text.secondary, centered

state: disconnected **Named-pipe down · last refresh stale**

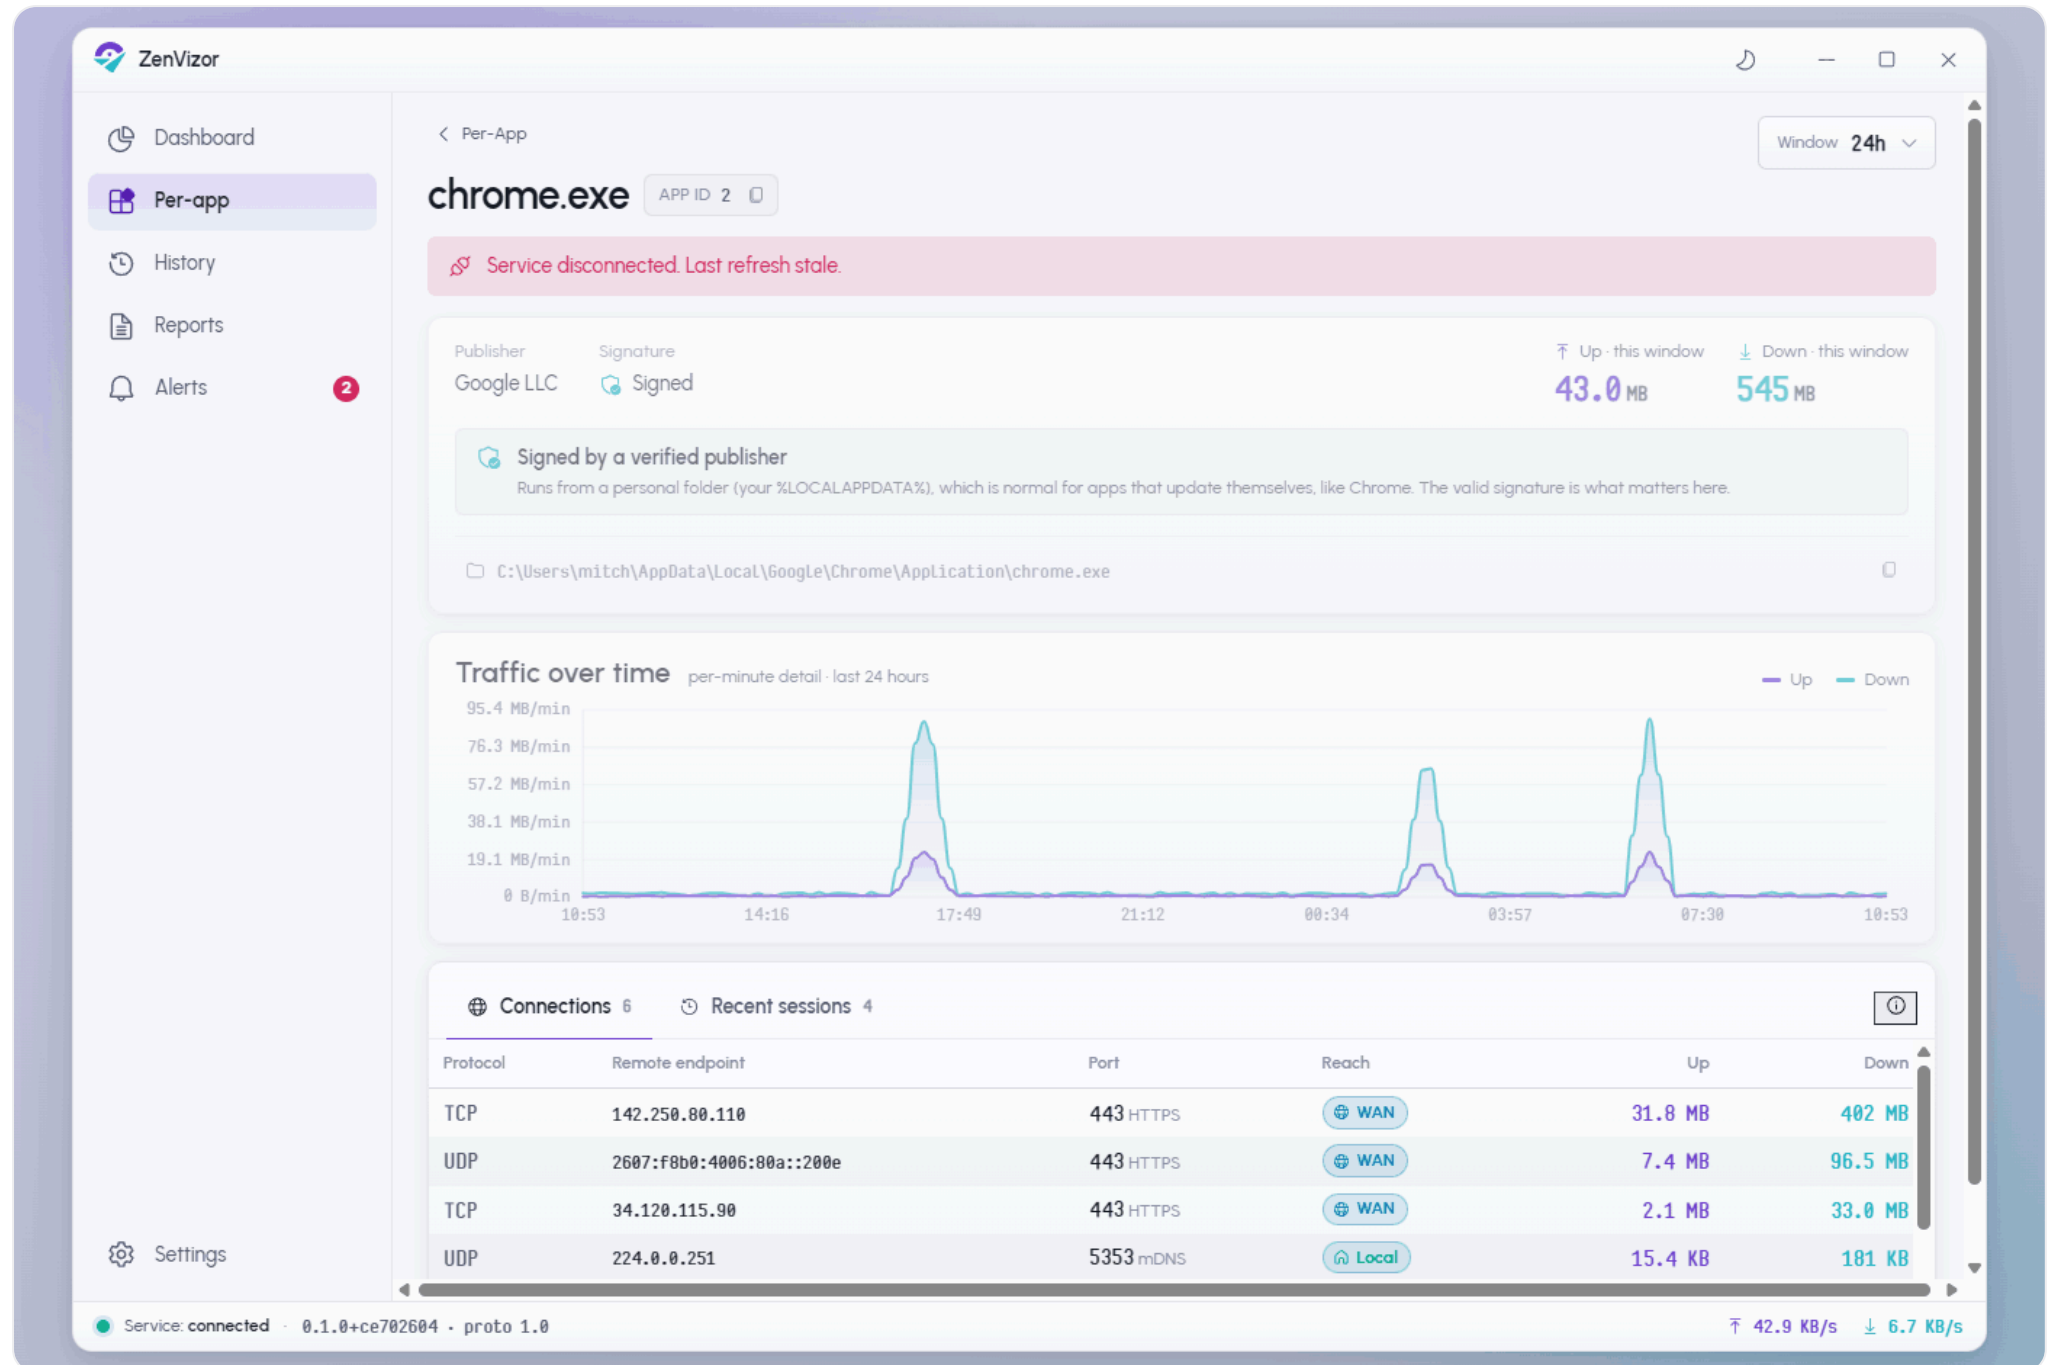

HistoryQueryClient.IsConnectionLost. Critical banner. Summary, chart, and grids retain their last-known values at Opacity 0.6 (preserve-last-known, not cleared).


status.critical.background status.critical

Banner · Service disconnected. Last refresh stale.

Tokens · status.critical.background / status.critical

Body · last-known data @ Opacity 0.6


state: error **Query failed (not pipe-down)**

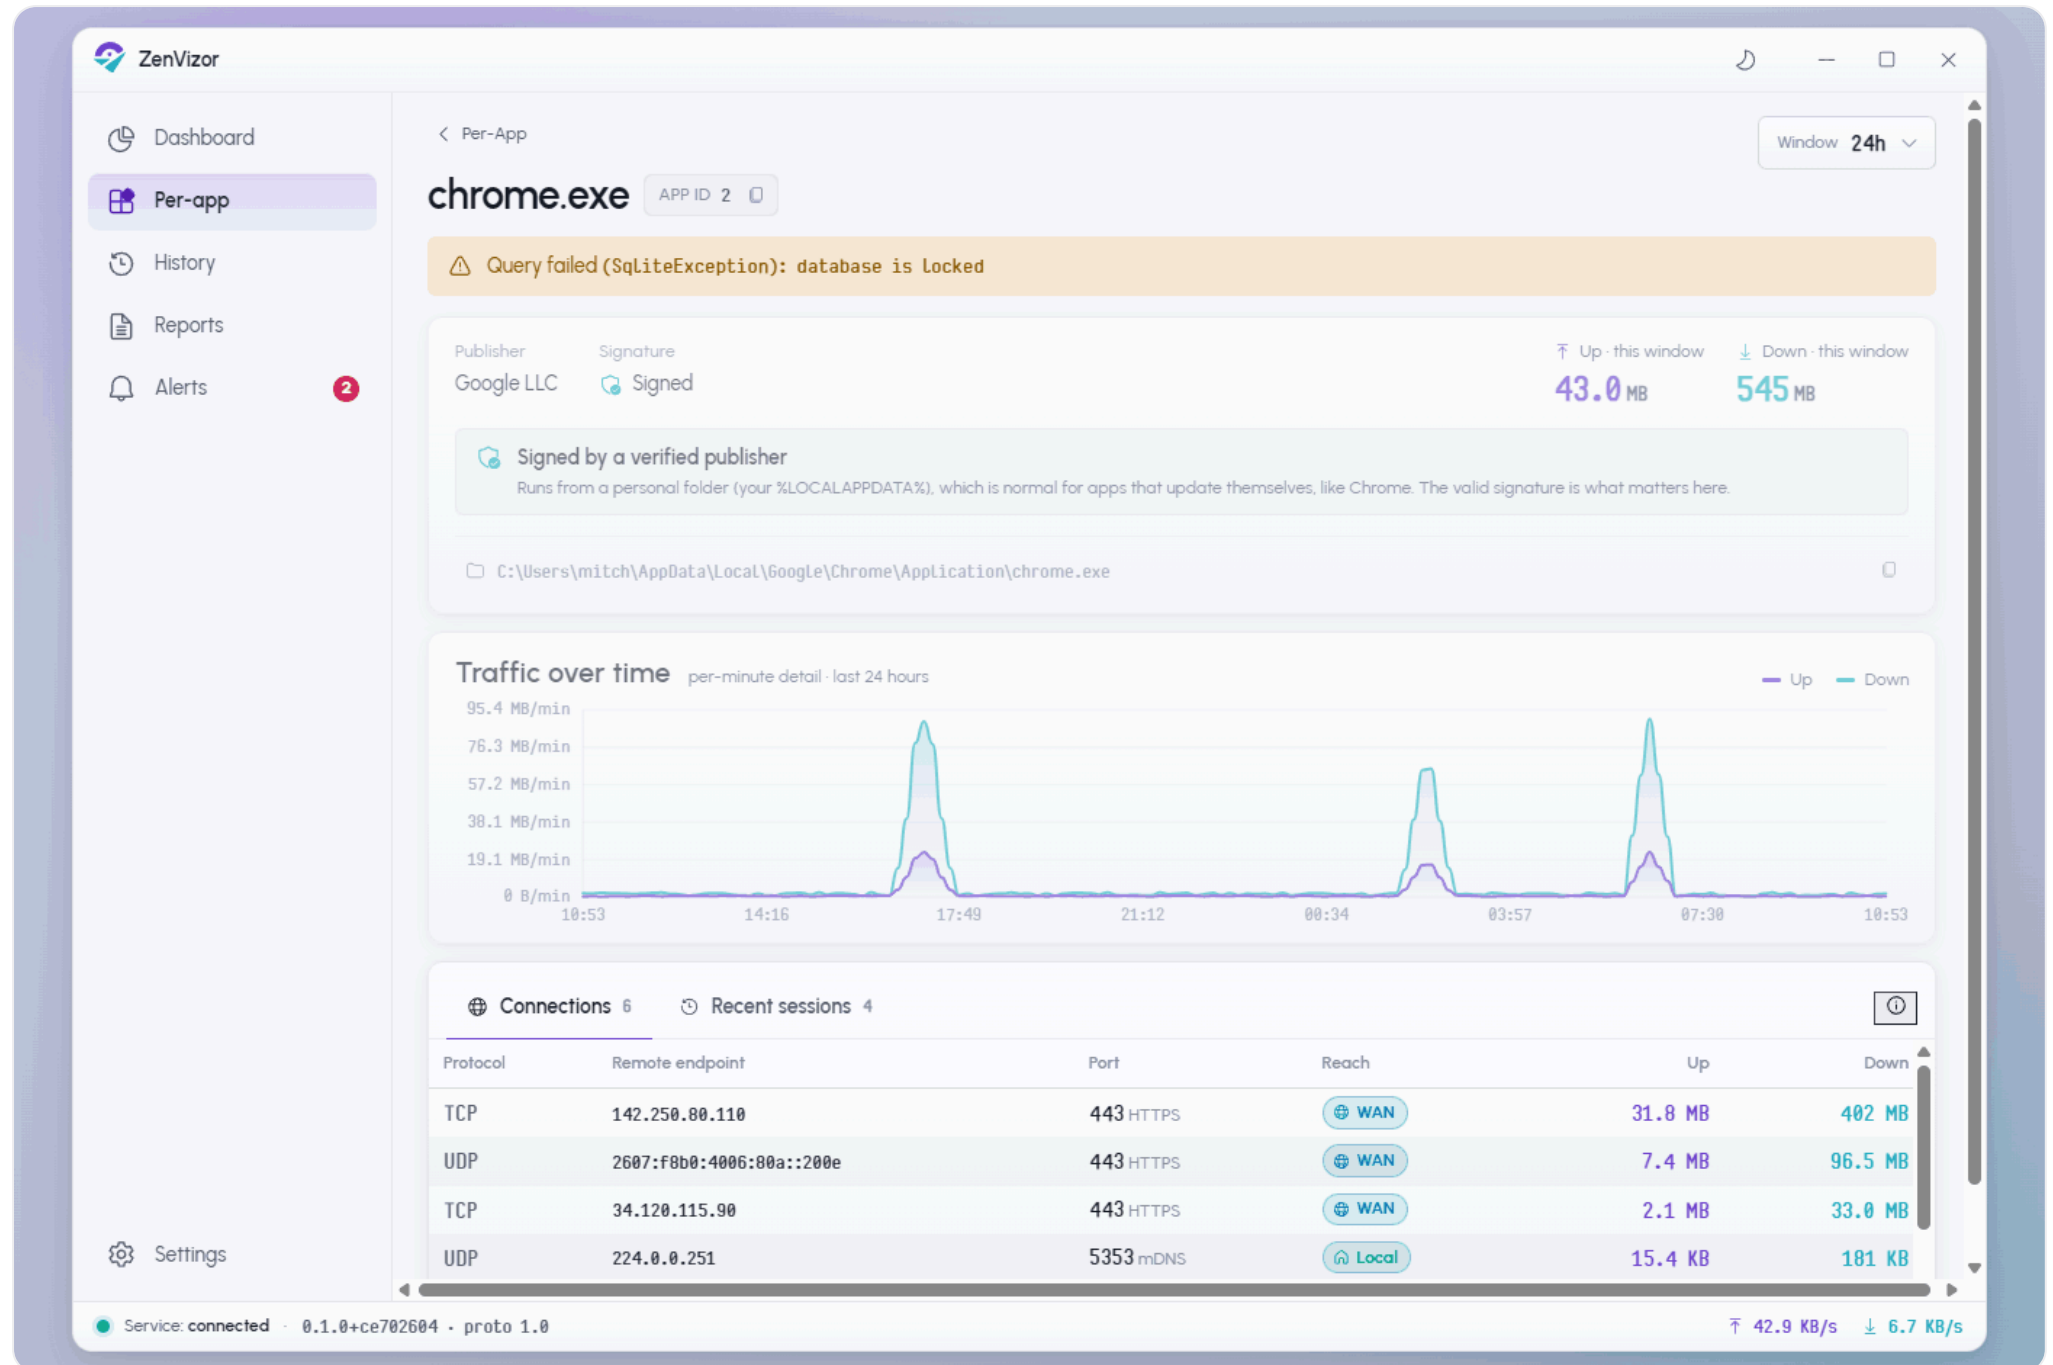

Any other query failure. Caution banner with the exception type and message. Body retains last-known data at Opacity 0.6. Split is disconnected-vs-error (same as Per-App / History; opposite of Dashboard).

```
status.caution.background    status.caution.text
```

Banner	Query failed ({ExceptionTypeName}): {ExceptionMessage}
Example	Query failed (SQLiteException): database is locked
Body	last-known data @ Opacity 0.6

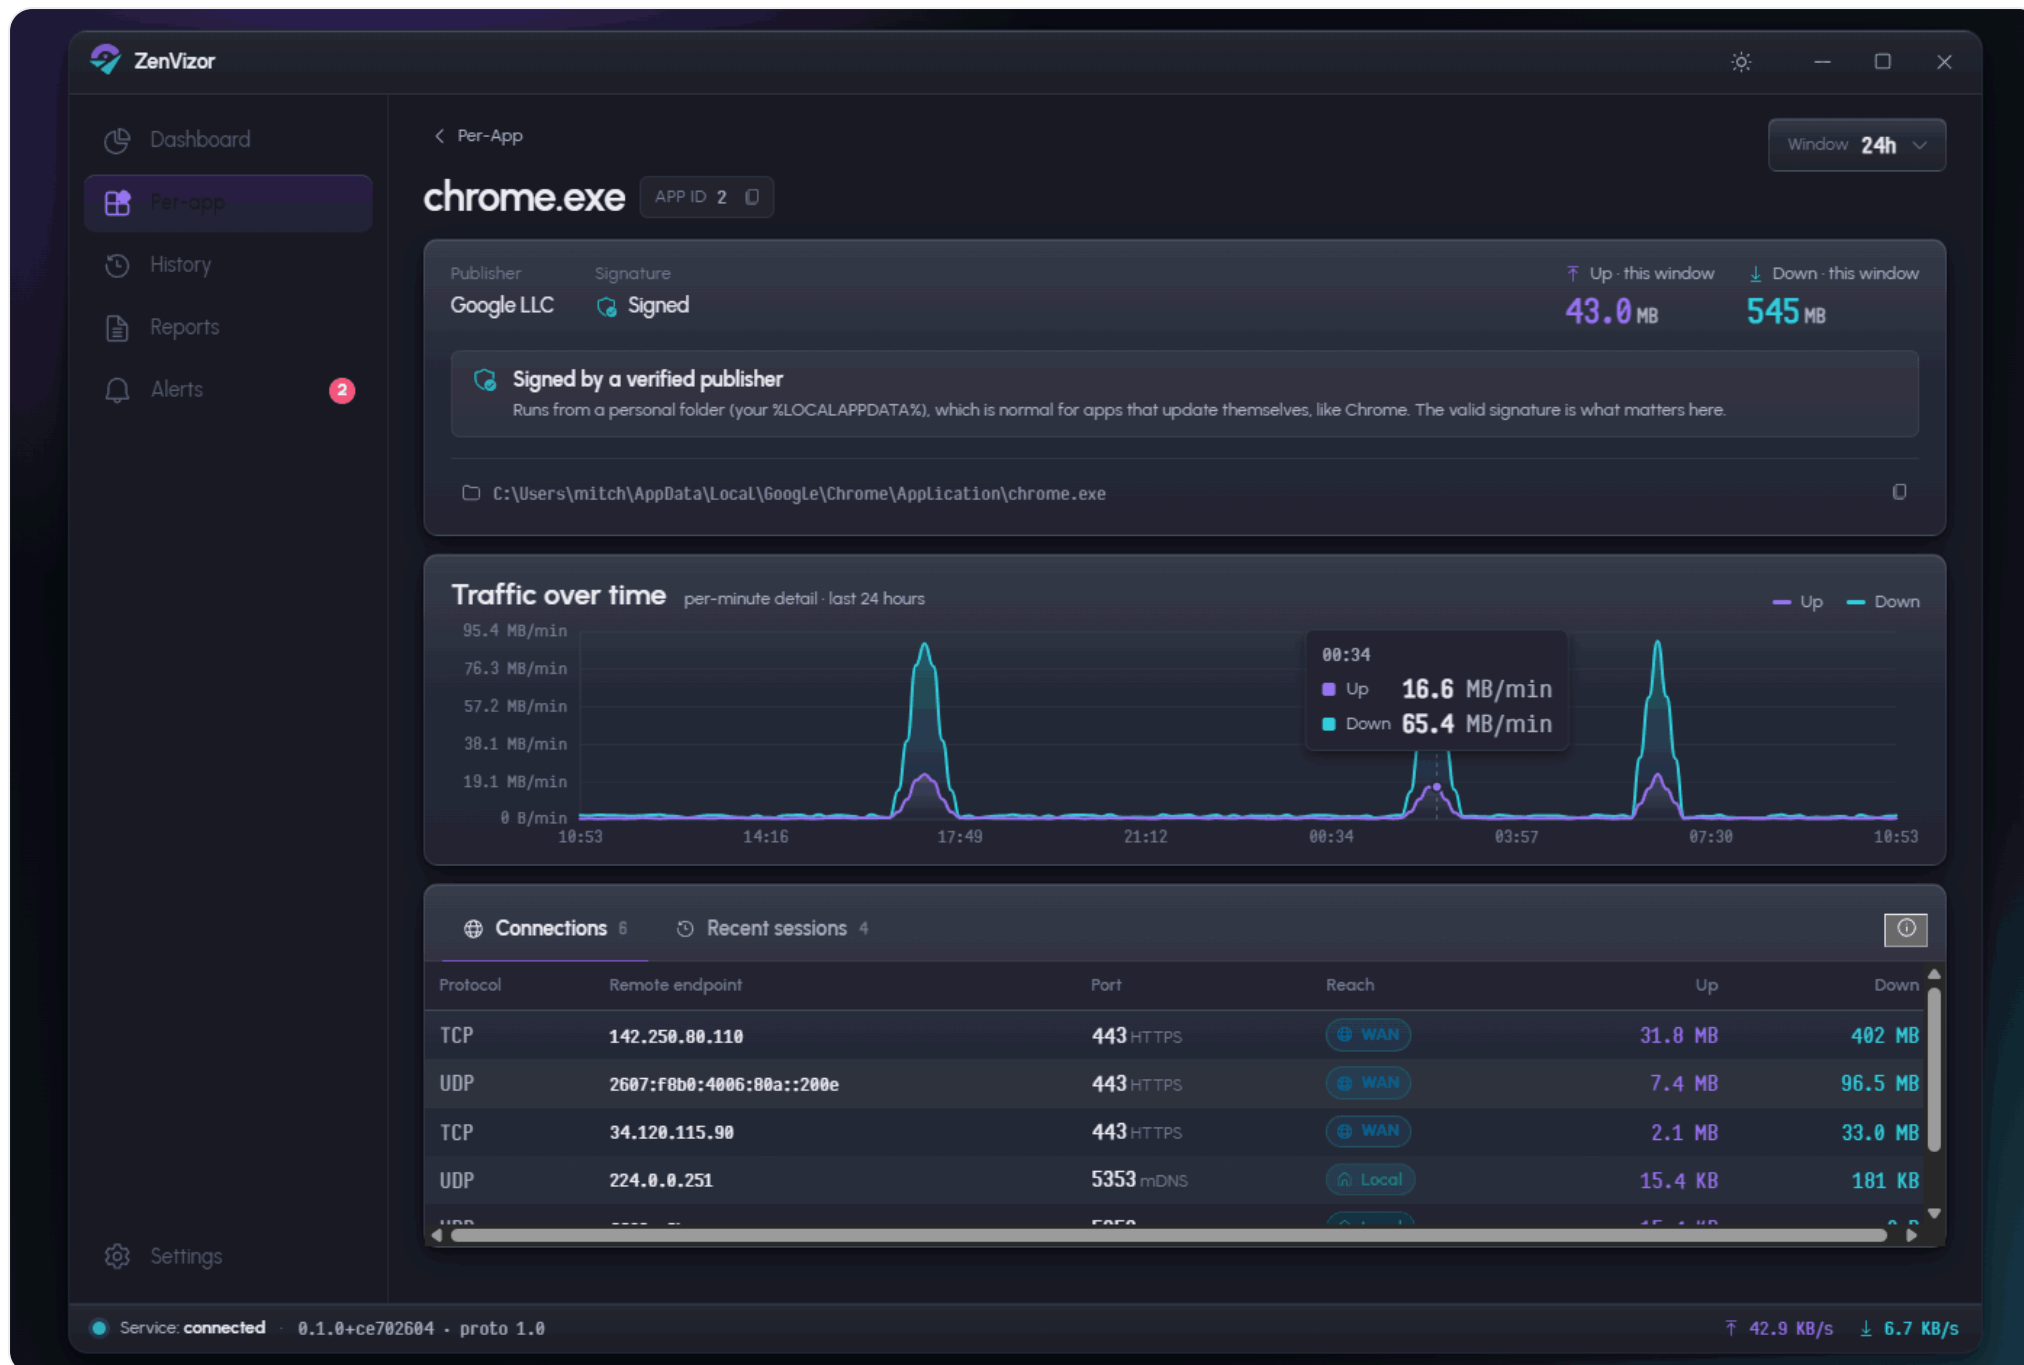

The canonical steady state in dark. Cards carry the cockpit metallic gradient; chart up/down series and all chart-chrome tokens theme-swap. Every brush that appears in both themes is a DynamicResource.

```
surface.card  chart.upSeries  chart.downSeries  text.primary
```

Cards · metal.card (dark) + edge.light

Series · chart.upSeries / downSeries swap

Chrome · chart.axis / gridline / label swap

New patterns

One-line definitions so other screens implement them consistently if they adopt the pattern.

PATTERN	DEFINITION
Identity summary block	Opaque <code>surface.card</code> : a label/value field row (caption label over body value) on the left, large mono Up/Down totals on the right, a full-width Trust line, and a borderless full-width <code>text.mono</code> path row beneath a <code>border.subtle</code> divider.
Trust line	Full-width verdict row inside the summary: leading status glyph + a bold plain-language verdict + a caption explainer. Neutral on <code>surface.subtle</code> ; escalates to <code>status.caution.background</code> / <code>status.caution.text</code> only in the alert combination.
Path copy row	Borderless full-width row that is itself the copy-to-clipboard target: leading folder glyph, <code>text.mono</code> path (wraps, never truncates), trailing copy glyph. Hover wash <code>surface.subtle</code> .
Tabbed data card	One <code>surface.card</code> hosting two grids behind a tab strip (accent underline on the active tab) with a shared info-popover trigger. Alternating row shading <code>surface.subtle.alt</code> , no row dividers.
Comprehension info-popover	An <code>info</code> button on a data card opens a plain-language "what these columns mean" popover keyed to the active tab. Pairs with humanized headers and inline service captions.

Layout · density · scroll

SURFACE	HINT
Page root	<code>scroll</code> : page (hosted in NavigationView's DynamicScrollViewer). Outer margin <code>space.24</code> .
Connections / Sessions grid	<code>density</code> : default (row ~28). <code>scroll</code> : pane inside the card. <code>MaxHeight</code> = $(\text{window.ActualHeight} - 220) / 2$ for side-by-side; tabbed uses one card so the residual-height formula applies to the single grid. Keep <code>EnforceDataGridBounds</code> wired on <code>Loaded</code> + <code>SizeChanged</code> · virtualization stays.
Cards	All four cards: <code>surface.card</code> + <code>border.card</code> 1px + <code>radius.card</code> , with the Dashboard metallic treatment (<code>metal.card</code> gradient + <code>edge.light</code>).

SURFACE

HINT

Status banner

`radius.control` , padding `space.8` , no border. Default Visibility=Collapsed.

Copy strings

Exact UI text. **No em dashes anywhere** · periods / commas / parentheses, the middle dot • for inline separators, an en dash – only for empty/placeholder data cells.

SURFACE	STRING
Chart subtitle (Samples)	per-minute detail • Last 24 hours
Chart subtitle (Hourly)	hourly buckets • Last 7 days
Chart no-data overlay	No traffic recorded in this window.
Connections empty	No endpoints recorded in this window.
Sessions empty	No sessions recorded in this window.
Loading caption	Loading... (after ~ls, <code>text.caption</code> / <code>text.secondary</code>)
Disconnected banner	Service disconnected. Last refresh stale.
Error banner	Query failed (SQLException): database is locked (pattern: Query failed ({ExceptionTypeName}): {ExceptionMessage})
Trust line · alert	Unsigned app running from a personal folder, with active connections + explainer.
Trust line · benign signed	Signed by a verified publisher + "runs from a personal folder..." explainer.
Trust line · signed/system	Signed and running from a system folder
Back affordance	Per-App with ChevronLeft20
Window picker items	1h / 24h / 7d / 30d / 90d shorthand; long form on the ToolTip (e.g. Last 24 hours). Default index 1.
Empty data cell	– (en dash, never em)

Hand-off notes

No new tokens. Two pointer renames, applied to all four cards on this page:

CardBackgroundFillColorDefaultBrush → `surface.card` (opaque card background)

ControlElevationBorderBrush → `border.card` (1px card stroke)

FOLLOW-UP (CLAUDE CODE)	DETAIL
Session length column	Derive from <code>StartTimeUnixMs / EndTimeUnixMs</code> (for a (running) session, elapsed-so-far against now). Format <code>Hh Mm / Dd Hh</code> . Low-effort, shown in the mock.
Grain-adaptive chart	Axis labelers <code>(/min · /hr · /day</code> and <code>HH:mm · MM-dd HH · MM-dd)</code> + subtitle shorthand + forgiving <code>GeometrySize=20</code> all live in shared <code>ChartBuilder</code> . History inherits.
Bottom rate mirror	<code>MainWindow</code> chrome, not <code>App Detail</code> . Drawn in the mock for context only.