

Alerts

Things ZenVizor noticed about your machine that might be worth a look. This is the Phase-6 Alerts screen worked up against the locked brief — full state coverage in the FluentWindow, the two-surface copy model, the dismiss contract, three filter axes, and the selected treatment for each of the eight resolved questions.

States 11 + dark audit

Decisions Q1–Q8 locked

Theme Light leads · dark audit

Type Catalog ×6 rendered

1

Composition system

Per-item metal-recipe cards (Q1-A); severity as a left bar + tinted tile *and* a labelled badge (Q2 A+B); “why this matters” as a full-width expand disclosure (Q3-A); a segmented State control with inline severity checkboxes and a type menu (Q4 A+C). These are your locked picks — every state frame renders them.

2

Tokens, patterns & hints

Every surface is annotated with canonical dotted-name tokens (`surface.card` , `status.caution.background` , `radius.md` ...) in the build-spec section; new tokens and patterns the screen introduces are declared there, and layout / scroll / density hints sit inline on each state frame.

3

Honest & passive

No kill/block/quarantine — Dismiss is UI-state with a checkmark, not a destructive action (§13). Paths, signers and counts use `text.mono` ; the feed is reverse-chronological, not ranked (§11).

DELIVERABLE · §4 + §17

State matrix

Every Alerts state rendered inside the full FluentWindow — title bar, nav rail with the live badge, and status strip — so the cross-page “look at Alerts” story is auditable alongside the page. Light theme leads; the steady state is also rendered in dark to audit theme-swap.

DEFAULT · ACTIVE

Steady state — filter: Active instances 1–4 active · 5–6 dismissed (hidden here)


scroll: pane

MaxHeight= 460

density: default

page scroll: page

The landing view. Summary strip answers “is there anything to look at right now” in one scan; the feed is reverse-chronological. Each item carries severity (left bar + tinted tile), headline, per-instance detail, a **Why this matters** disclosure, metadata with the user-facing source label, and a one-click **Dismiss**. `MaxHeight` on the feed `ListView` keeps virtualization alive (§10).

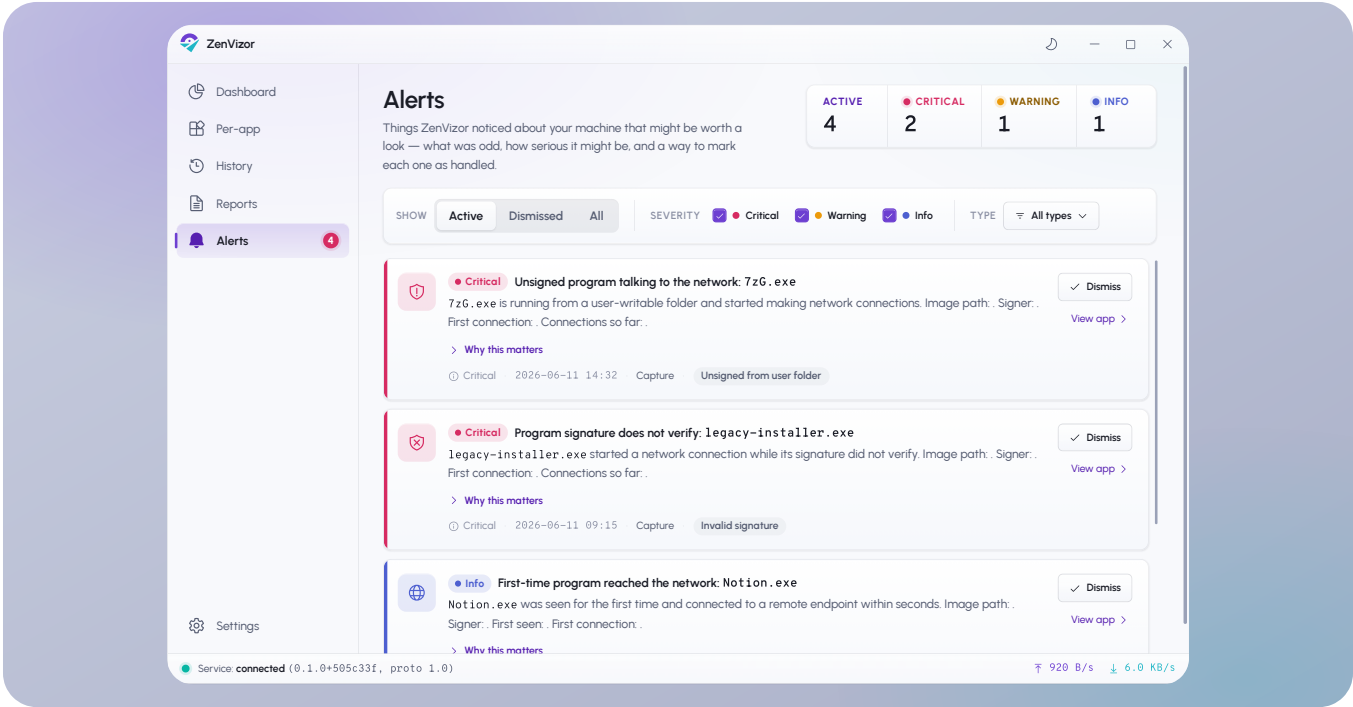

DEFAULT · ALL

Steady state — filter: All active + dismissed mixed; dismissed demoted


scroll: pane

MaxHeight= 460

density: default

page scroll: page

Same data, filter switched to All to exercise the active/dismissed visual distinction. Dismissed rows lose the severity tint, drop to `surface.card.alt` at reduced opacity, and swap the Dismiss button for a “Dismissed” state — visually distinct but still legible.

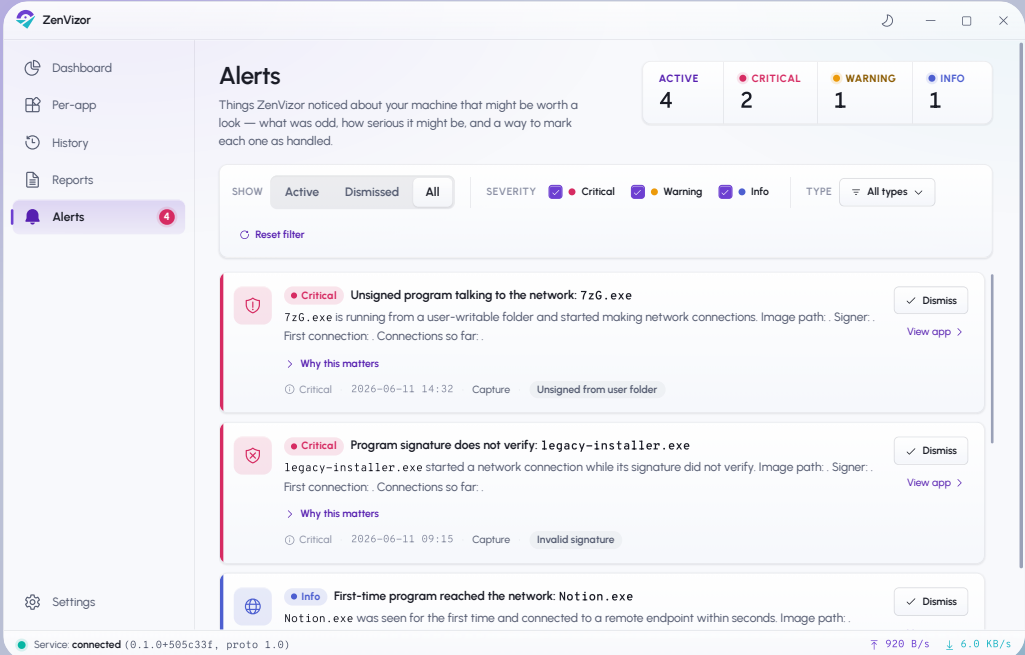

ALL ACTIVE

All active — no dismissed yet six active instances · the “you have work to do” state


scroll: pane

MaxHeight= 460

density: default

page scroll: page

Common right after first triage. Severity composition reads at a glance from the summary strip (2 Critical · 2 Warning · 2 Info) and the per-item bars. This is the heterogeneous feed exercising all six catalog types.

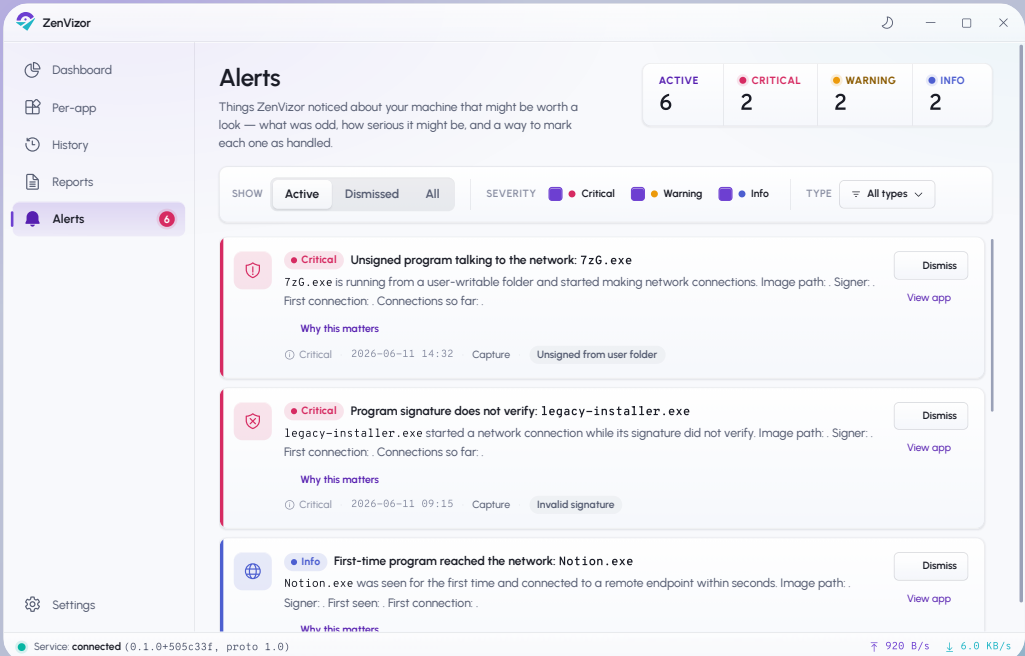

DARK · AUDIT

Steady state — dark theme filter: All · theme-swap audit


scroll: pane

MaxHeight= 460

density: default

page scroll: page

The required dark-theme audit frame (§4). Tokens flip via the semantic layer — surfaces, the metal recipe, status tints, and the violet accent all re-resolve. Banners and severity expressions theme-swap by token semantics.

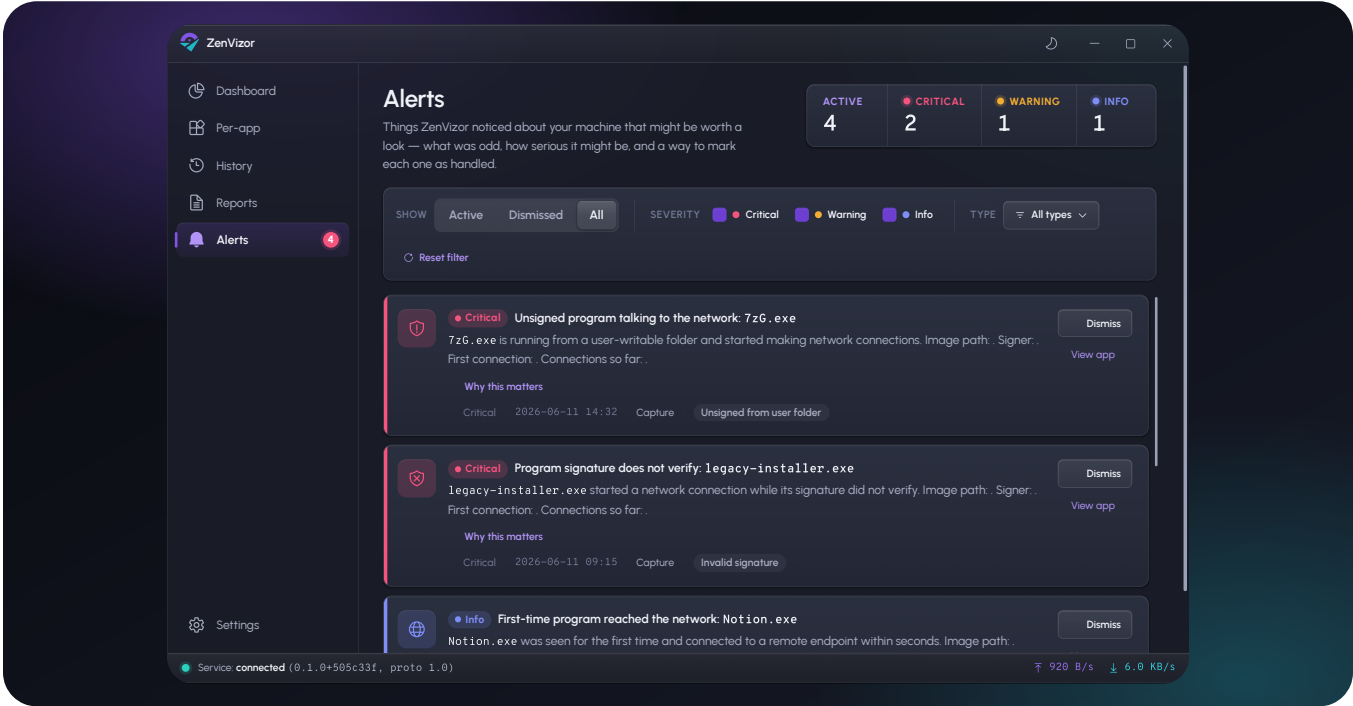

EMPTY · TRANSIENT


Empty & transient states

scroll: none MinHeight= 420 (center) density: n/a

Four low-density states, grouped. **No alerts** (cold start / post-retention) and **all dismissed** deliberately use distinct copy so they never read the same. **Filtered-empty** (Q6) names the filter as the cause and offers a reset CTA carrying the **hidden count** — the critical distinction from “no alerts”. **Loading** centers a Wpf.Ui **ProgressRing** (no skeleton shimmer, §8.1) with the summary strip in its em-dash placeholder form.


EMPTY

No alerts at all

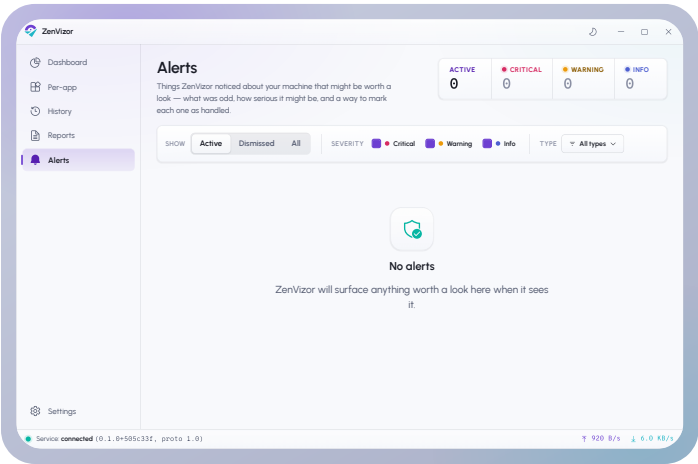


ALL DISMISSED

Everything triaged

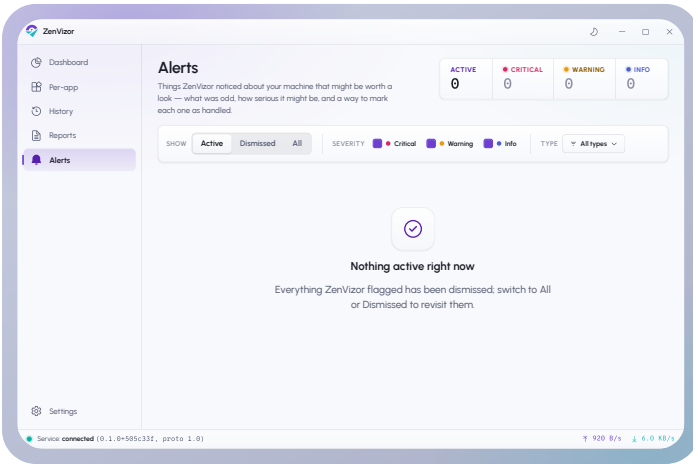


FILTERED EMPTY

Filter hides everything (Q6)

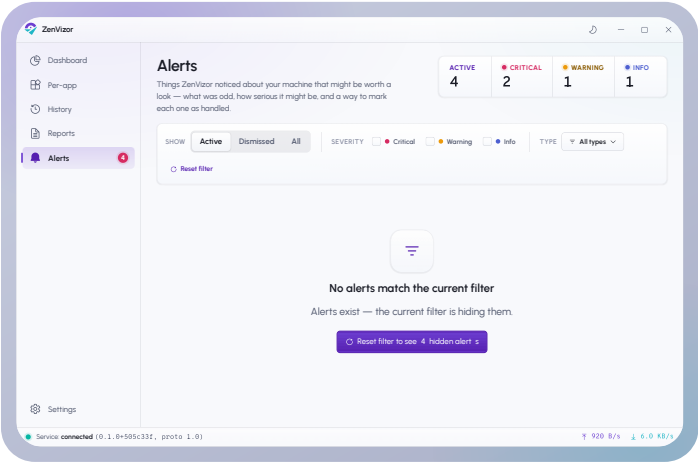

LOADING

Initial GetAlerts in flight

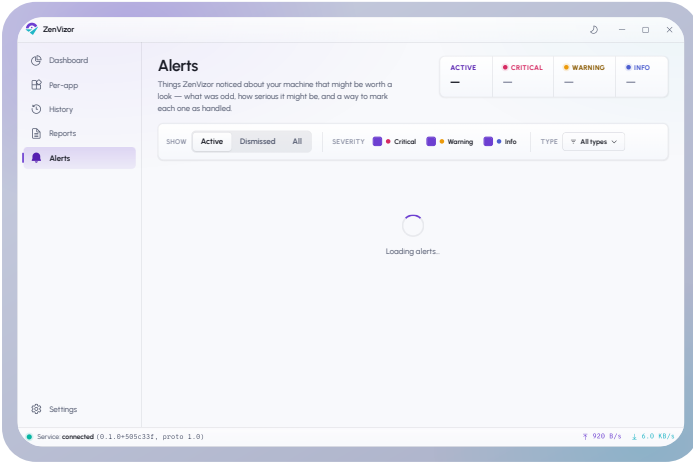


DISCONNECTED

Named-pipe down

scroll: pane MaxHeight= 460 density: default page scroll: page

Inline banner (`status.critical.background`) beneath the header. Filter affordance stays operable (UI-local); per-item **Dismiss** visually disables until the connection is restored. Status strip flips to “disconnected (pipe closed)”.

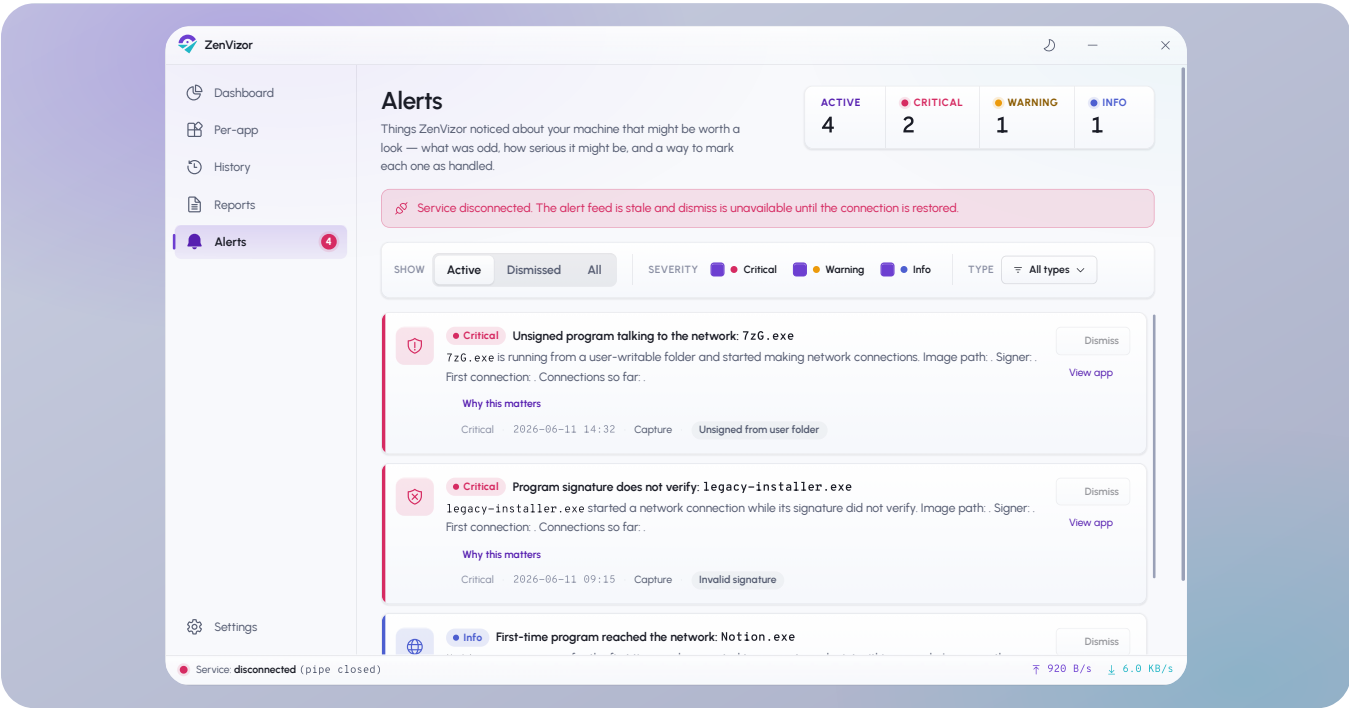


ERROR

Query failure (not pipe-down)

scroll: pane MaxHeight= 460 density: default page scroll: page

Inline banner (`status.caution.background` , `status.caution.text`) carrying the exception type. Standard disconnected/error split — no merge (§8.3).

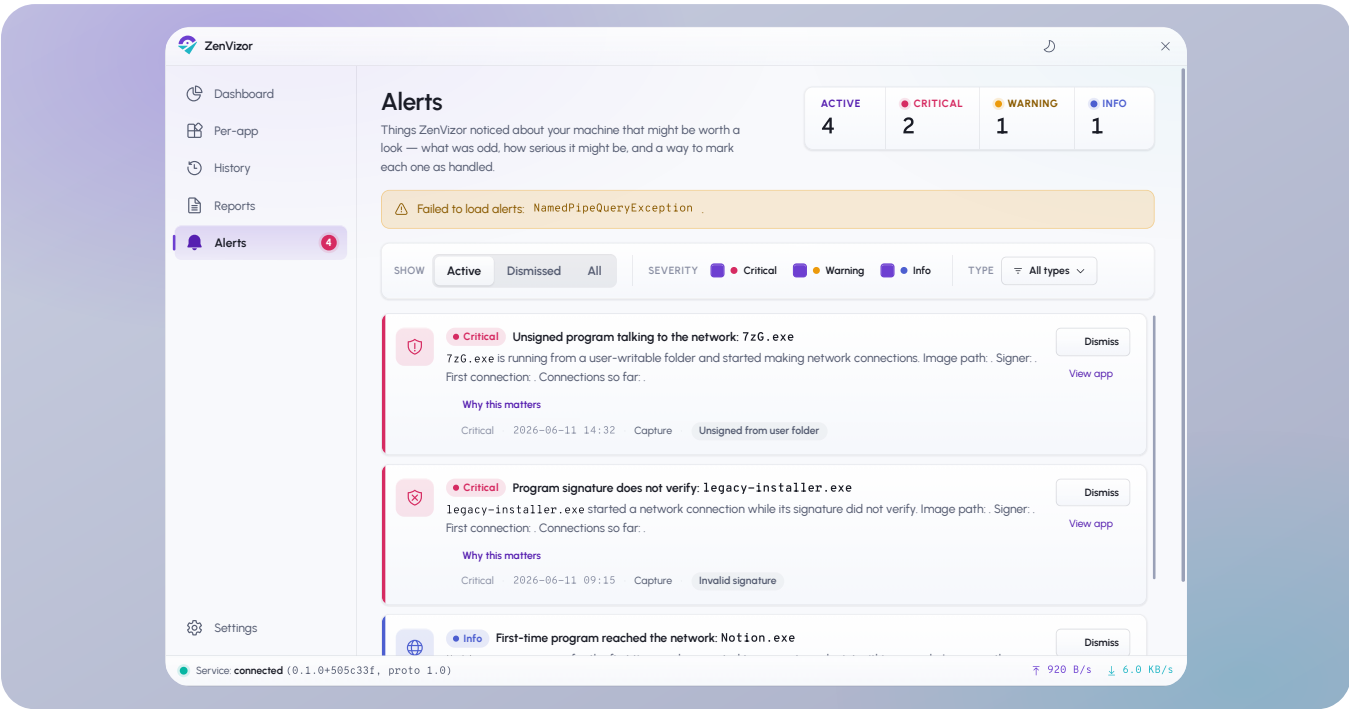

LIVE ARRIVAL · VISIBLE

Push arrival included by active filter

one-shot cue · feed body updates


scroll: pane

MaxHeight= 460

density: default

page scroll: page

An `AlertRaised` push the active filter includes. The new item inserts at the top with a one-shot ring glow + "Just arrived" tag (~200ms, not continuous — §8.2); the summary strip and nav badge increment.

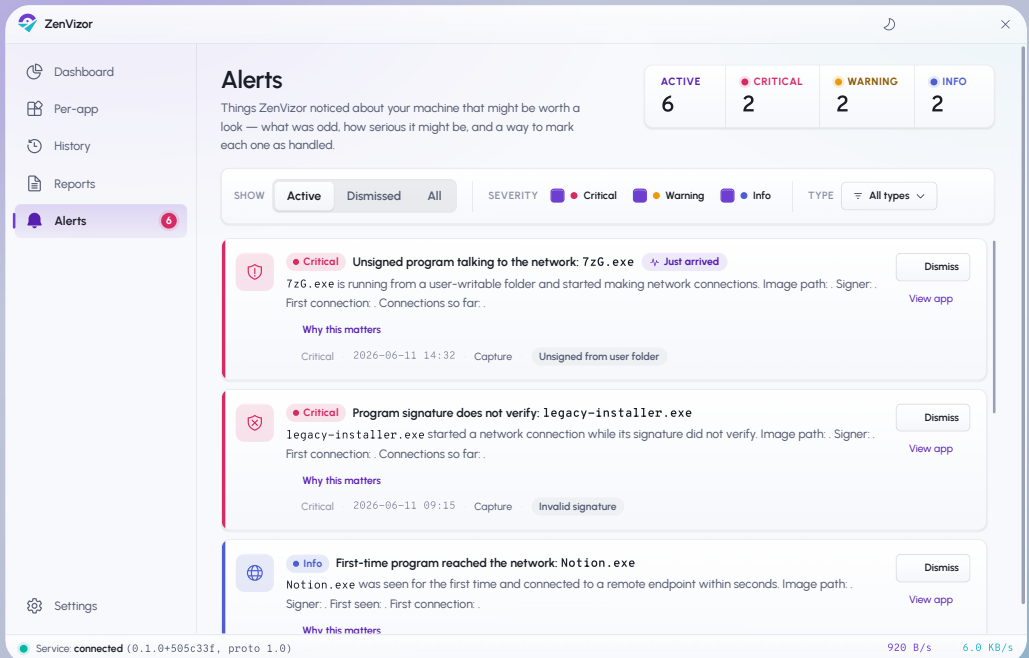

LIVE ARRIVAL · EXCLUDED

Push arrival excluded by active filter

feed body unchanged · summary + badge still register


scroll: pane

MaxHeight= 460

density: default

page scroll: page

Same push, but the user is on **Dismissed**, so the feed body does **not** change. The summary strip still increments (Critical +1) and the nav badge registers the arrival — so filtering never feels like the product is hiding alerts.

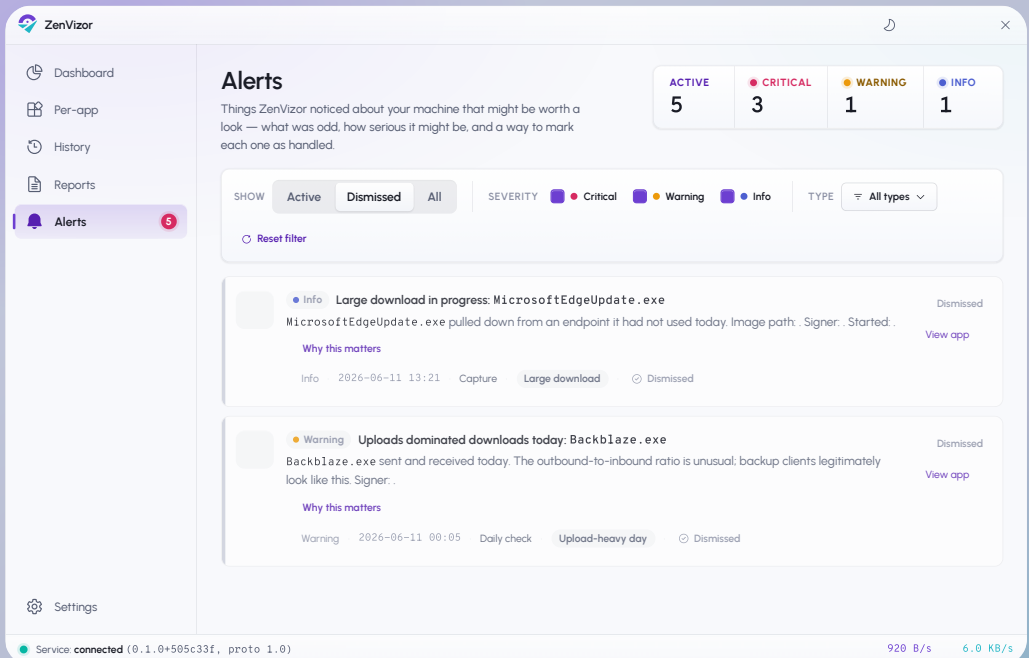

DELIVERABLE · §16.1 + §18

Chrome, badge & interim states

The Alerts nav-rail badge in its selected treatment (Q8-A) with the one-shot pulse-ring spec, and the interim placeholder that ships in the polish interlude before Phase 6.


NAV BADGE

Alerts nav-rail badge — selected treatment (Q8-A)

Count + highest-severity tint (Critical → `status.critical`). Zero active → no badge; one or more active → a tinted count. Reads from the same view-model state as the page summary, so it is the cross-page surface for the excluded-by-filter arrival. **Pulse-ring spec (one-shot — easy to miss):** on an `AlertRaised` push the count increments and re-tints to the new highest severity, and *simultaneously* a single violet (`accent.default`) ring expands outward and fades to transparent over one `motion.duration.arrival` (~600ms) `motion.ease.glide` step (scale ≈ 1 → 2.6, opacity ≈ 0.85 → 0). It plays **exactly once** per arrival — never loops, never on initial mount / page load / theme toggle, never on dismiss (count decrement is silent). The tint is persistent state; the ring is transient. Honors `prefers-reduced-motion` (count + tint still update, ring suppressed). Use `Replay arrival` to see the exact behavior.

0 Zero active — no badge


Clean nav item, no chrome added.

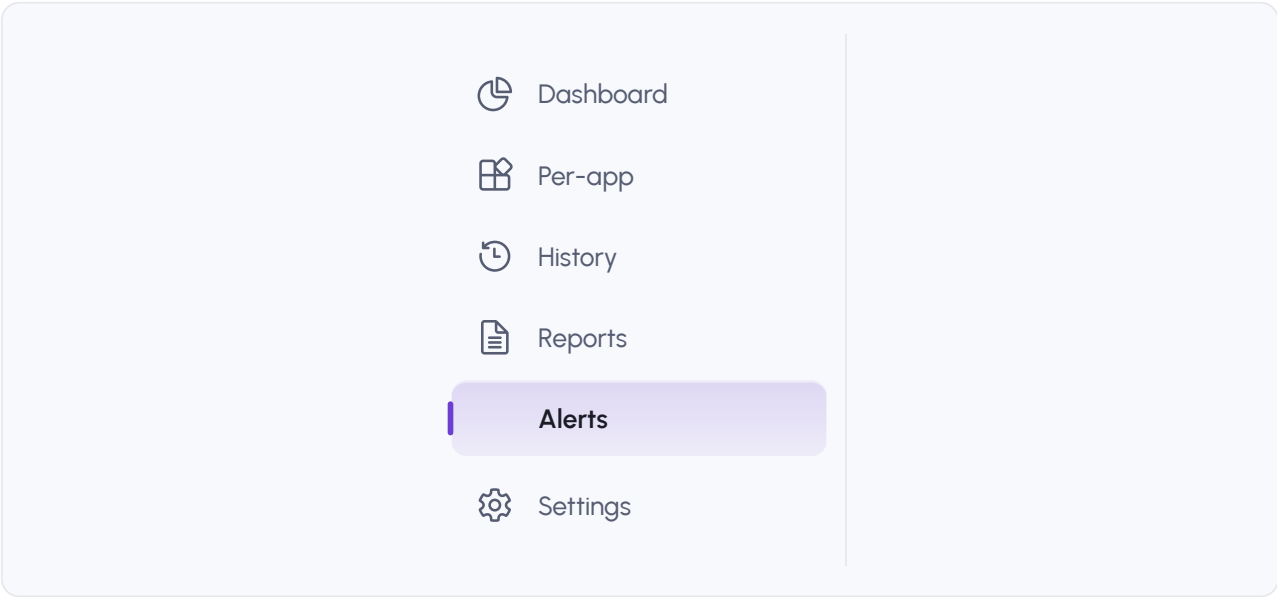

A Active — tinted count + one-shot pulse

Selected


The count answers “how many”, the tint answers “how bad”, and the ring announces a new arrival once without stealing focus.

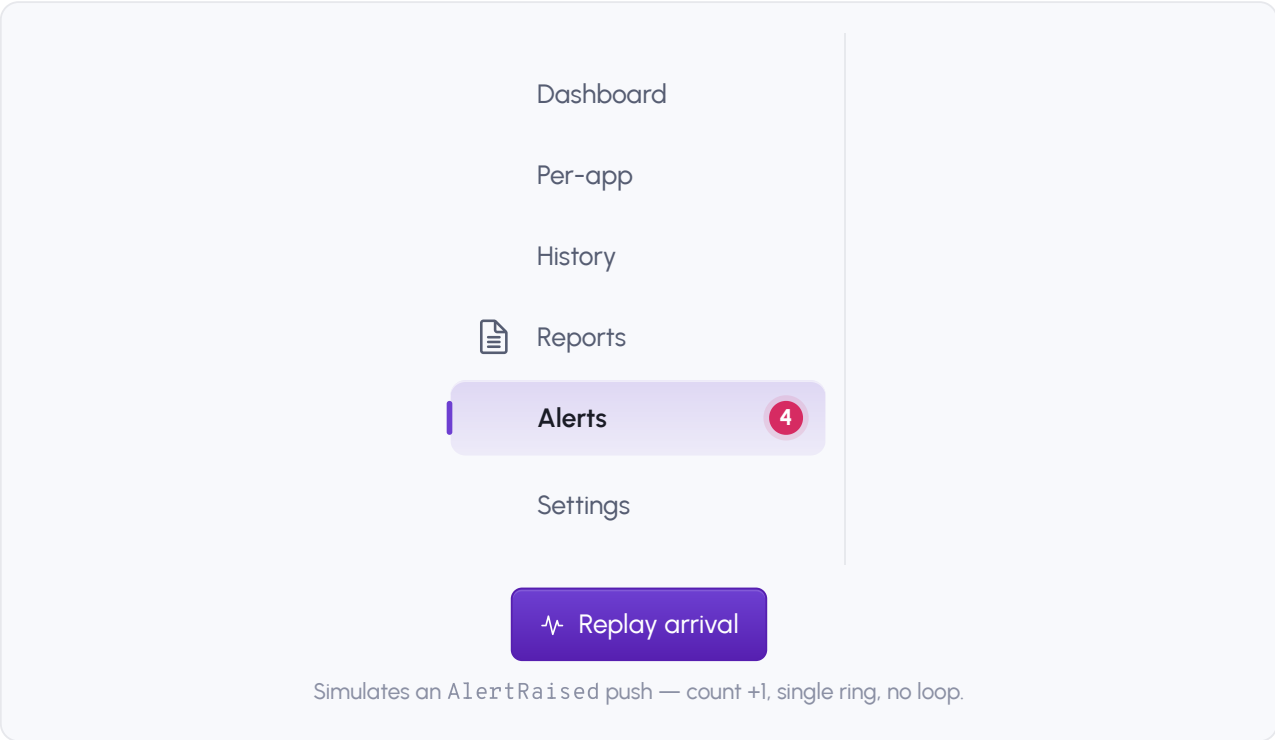

INTERIM

Polish-interlude placeholder (§18a) ships now, before Phase 6

Deliberate “this is coming” treatment so the screen doesn’t look unfinished next to the four polished screens — not the working layout with dummy data.

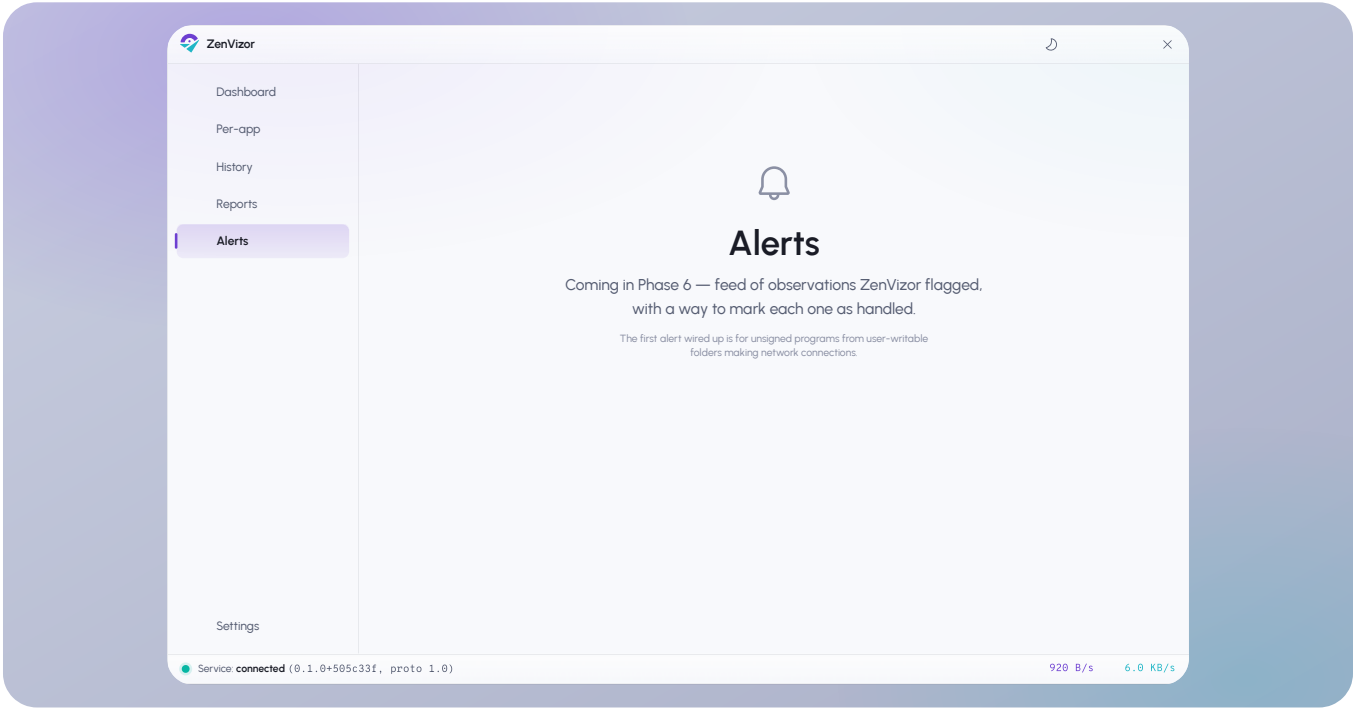

[HANDOFF](#) · [BUILD SPEC](#)

Tokens, patterns & build hints

Everything a native build needs without guessing: each surface mapped to canonical dotted-name tokens (no raw hex, no legacy aliases), the one new token and the new patterns this screen introduces

declared in full, and the variant selected for each open question. Layout / scroll / density hints sit inline on every state frame above.

§1 · §3

Token map

canonical dotted names · drop the dots → hyphens for the CSS handle

Page & window surface.*			Summary / KPI strip new pattern	
ELEMENT	TOKEN	ROLE	ELEMENT	TOKEN
Window backdrop	surface.window	Mica desktop tint	Card surface	metal.card
Content root	surface.background	page under Mica	Card border / radius	border.card · radius.md
Section grouping	surface.layer	raised panel / flyout	Top catch-light	material.edge-light
Page margins	space.24	24px outer	Shadow	shadow.sm
Card stack gap	space.16	between major cards	Cell divider	border.subtle
			Active eyebrow	accent.text
			Severity eyebrow	status.{critical caution neutral}
			Value	font.mono · text.primary
			Zero value	text.tertiary

Alert card (item) new pattern	
ELEMENT	TOKEN
Card surface / radius	metal.card · radius.md
Card border	border.card
Left severity bar (4px)	status.{critical caution neu
Icon tile bg / radius	status.*.background · radius
Icon glyph	status.*
Headline	type.body-strong · text.prim
Image / path / counts	font.mono · text.primary
Severity badge	status.*.background / .text
Detail prose	type.body · text.secondary
Why link	accent.text
Why panel	surface.subtle · border.subt
Meta / type tag	type.caption · text.tertiary
Dismiss button	metal.control · border.contr
Drill link	accent.text
Dismissed surface	surface.card.alt

Filter bar new pattern		
ELEMENT	TOKEN	ROLE
Bar surface	metal.card · border.card	radius.md, shadow.sm
Group label	text.tertiary · type.caption	tracking.wide
State segmented (sel)	accent.fill · text.on-accent	single-select
Severity checkbox	metal.control · border.control	box, radius.xs
Checkbox (checked)	accent.fill · text.on-accent	check glyph
Severity dot	status.*	colour cue beside label
Type menu	metal.control · border.control	dropdown, 6 entries
Reset link	accent.text	shown when ≠ default
Axis divider	border.subtle	vertical 1px

Banners · empty · loading		status.*
ELEMENT	TOKEN	
Disconnected banner	status.critical.background / status.critical	
Error banner	status.caution.background / status.caution.text	
Banner code	font.mono	
Empty medallion	metal.control · sheen · border.card	
Empty (ok) glyph	status.success	
Empty heading / body	type.subtitle · type.body-large	
Reset CTA	accent.grad · text.on-accent	
Loading ring	accent.default on surface.subtle-2	

Nav-rail badge			new pattern
ELEMENT	TOKEN	ROLE	
Count fill	status.{highest severity}	tinted b	worst active
Count text	text.on-accent	white o	tint
Plain count (alt B)	status.critical / accent.default	severity	blind
Pulse ring	accent.default	one-sh	border
Pulse timing	motion.duration.arrival · motion.ease.glide	scale→	opacity

§3 New tokens introduced

Only one token is new; everything else reuses the primer's table. Declared with canonical name, value, and rationale.

motion.duration.arrival
600ms

One-shot arrival cues (the alert-card ring glow and the nav-badge pulse ring) must read across the full nav rail and feed; dur.slow (320ms) is too quick to track at the badge's small size. Theme-invariant → StaticResource.

§4

New patterns introduced

Each pattern carries a one-line definition so other screens adopt it consistently.

Summary / KPI strip

One `metal.card` with internal `border.subtle` dividers; per cell an uppercase `type.caption` eyebrow (severity-tinted) above a `font.mono` tabular value. Mirrors the Per-App APPS/UP/DOWN strip exactly.

Alert card

Per-item `metal.card` with a 44px `status.*`-tinted icon tile and a 4px left severity bar; headline → detail → disclosure → meta stack on the left, action column (Dismiss + drill) on the right.

Severity expression

Left bar + tinted tile + labelled badge together — severity is never carried by colour alone (HC / colorblind safe). Resolved through the locked map to `status.{critical|caution|neutral}`.

Why-this-matters disclosure

A quiet `accent.text` toggle expands a full-width `surface.subtle` panel with the static type-level framing; no left accent bar (the card's severity bar already carries it). Variable height → pixel-unit virtualization.

Severity checkboxes

Inline checkbox (`metal.control` box, `accent.fill` when checked) + `status.*` dot + label, kept in a single row — reads as "show this" more clearly than a toggle chip.

Inline status banner

Full-width `status.*.background` strip with a leading glyph, pinned beneath the page header; disconnected = critical, error = caution. Shares the slot with the live-arrival case (count, not a second banner).

Empty / loading

Centered `metal.control` + `sheen` medallion, `type.subtitle` heading, `type.body-large` body; the filtered-empty variant adds a counted reset CTA naming the hidden count.

Nav-badge pulse

Count + highest-severity tint, with a one-shot `accent.default` ring (`motion.duration.arrival`) fired only on arrival — never on mount, dismiss, or theme toggle, never looping.

§7

Variant selection — §8.4

The locked choice for each open question, declared so the build does not have to infer it from the frames.

Q	SELECTED	WHY
Q1	Per-item cards (A)	Best scan-rhythm; trivial active/dismissed swap.
Q2	Left bar + tinted tile + severity badge (A+B)	Fast scan AND a text label — never colour-only.
Q3	Expand-on-click disclosure (A)	Keeps the default feed scannable.
Q4	Segmented State + severity checkboxes + type menu (A+C)	Checkbox reads clearer than a toggle chip for "show this".
Q5	Top-insert + one-shot ring glow (A)	Quiet, in-place; summary/badge carry the excluded case.
Q6	Cause + counted reset CTA (A)	Distinct from "no alerts"; names the filter.
Q7	Unsigned from user folder	Names the observation, not a verdict; scales to the roadmap types.
Q8	Count + highest-severity tint + one-shot pulse ring (A)	Answers "how many" and "how bad"; pulse spec called out explicitly.