EXPERIMENT-3

NAME : MITHULESH J ROLL NO : 240701313

1.COMMAND LINE INTERFACE:

PYTHON CODE:

```
# cli_delete.py
import os
import sys
if len(sys.argv) != 2:
    print("Usage: python cli_delete.py <filename>")
    sys.exit(1)
filename = sys.argv[1]
if os.path.exists(filename):
    os.remove(filename)
    print(f"File '{filename}' deleted successfully.")
else:
    print("File not found.")
```

OUTPUT:

```
(.venv) PS C:\Users\mithu\OneDrive\Desktop\user interface> python cli_delete.py sample.txt
>>
File 'sample.txt' deleted successfully.
(.venv) PS C:\Users\mithu\OneDrive\Desktop\user interface>
```

2.GRAPHICAL USER INTERFACE:

PYTHON CODE:

```
import os
import tkinter as tk
from tkinter import
filedialog, messagebox
def delete_file():
    file_path =
filedialog.askopenfilena
me()
    if file_path:
```

```
    try:
        os.remove(file_path)
        messagebox.showinfo("Success", "File deleted successfully.")
    except Exception as e:
        messagebox.showerror("Error", str(e))
root = tk.Tk()
root.title("File Deleter")
root.geometry("300x150")
btn = tk.Button(root, text="Select File to Delete", command=delete_file)
btn.pack(expand=True)
root.mainloop()
```

OUTPUT:

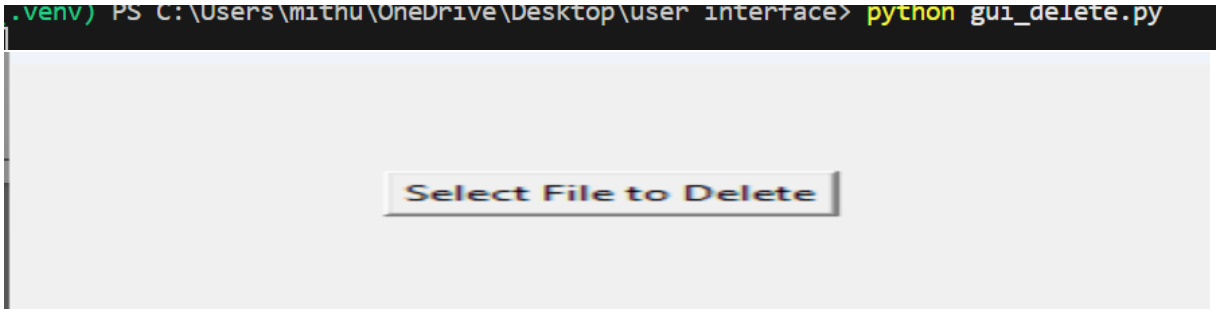

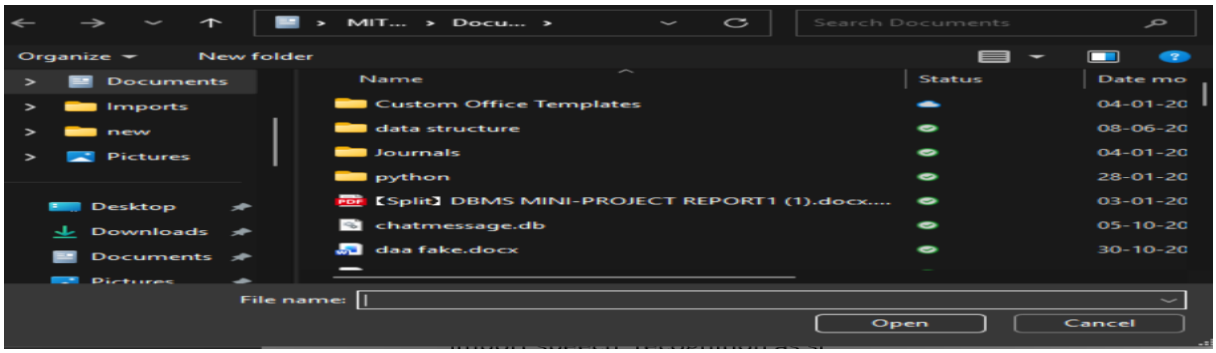

3.VOICE USER INTERFACE:

PYTHON CODE:

```
import os

import pyttsx3


engine = pyttsx3.init()


def speak(text):

    engine.say(text)

    engine.runAndWait()


speak("Voice interface activated")

speak("Please enter the file name to delete")


filename = input("Say (type) the file name to delete: ")


if os.path.isfile(filename):

    os.remove(filename)

    speak("File deleted successfully")

    print("File deleted successfully")

else:

    speak("File not found")

    print("File not found")
```

output

```
(.venv) PS C:\Users\mithu\OneDrive\Desktop\user interface> python voice_delete.py
>>
Say (type) the file name to delete: sample.txt
File deleted successfully
(.venv) PS C:\Users\mithu\OneDrive\Desktop\user interface>
```

4.USER SATISFACTION COMPARISON:

PYTHON CODE:

```
import matplotlib.pyplot as plt
cli_scores = []
gui_scores = []
voice_scores = []
n = int(input("Enter number of users: "))
for i in range(n):
    print(f"\nUser {i+1} Ratings (1 to 5)")
    cli = int(input("CLI Satisfaction: "))
    gui = int(input("GUI Satisfaction: "))
    voice = int(input("Voice UI Satisfaction: "))
    cli_scores.append(cli)
    gui_scores.append(gui)
    voice_scores.append(voice)
cli_avg = sum(cli_scores) / n
gui_avg = sum(gui_scores) / n
voice_avg = sum(voice_scores) / n
print("\nAverage Satisfaction Scores")
print("CLI:", cli_avg)
print("GUI:", gui_avg)
print("Voice UI:", voice_avg)
interfaces = ["CLI", "GUI", "Voice UI"]
scores = [cli_avg, gui_avg, voice_avg]
plt.bar(interfaces, scores)
plt.xlabel("User Interface Type")
plt.ylabel("Average Satisfaction Score")
plt.title("User Satisfaction Comparison")
plt.ylim(0, 5)
plt.show()
```

output

```
PS C:\Users\mithu\OneDrive\Desktop\user interface> python user_satisfaction.py
>>
Enter number of users: 4

User 1 Ratings (1 to 5)
CLI Satisfaction: 5
GUI Satisfaction: 5
Voice UI Satisfaction: 5
```