(a) Protocol A - realistic temporal split (ours)


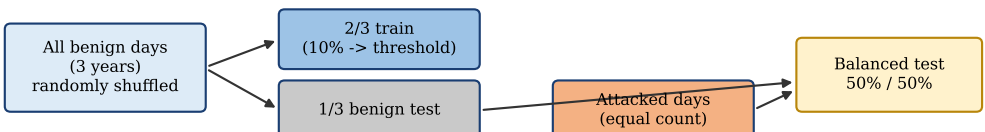
(b) Protocol B - benchmark-matched (B1: shuffled 2:1 split, balanced test)