Experiment No. 5

Execution of uptime, date and mv Commands in Kali Linux

1. Aim

To execute and study the uptime, date, and mv commands in the Kali Linux operating system and observe their outputs.

2. Requirements

Kali Linux operating system and its Terminal application.

3. Algorithm

1. Start Kali Linux and open the Terminal.
2. Type uptime and press Enter to display how long the system has been running, the number of logged-in users, and system load averages.
3. Type date and press Enter to display the system date and time.
4. Create or identify a test file in a practice directory.
5. Type mv old.txt new.txt and press Enter to rename old.txt to new.txt. Use filenames that exist in your practice directory.
6. Type ls to verify the renamed file.
7. Observe and record the output of each command.
8. Stop the experiment.

4. Commands and Explanation

`uptime`

Displays the current time, system uptime, number of logged-in users, and load averages.

`date`

Displays the current system date and time. The exact output depends on the system clock and time zone.


`mv old.txt new.txt`

Moves or renames a file. In this example, old.txt is renamed to new.txt. Run this only with test files in your practice directory.


5. Output Screenshots

The following are illustrative terminal-style sample outputs. The date and uptime values are examples; replace these images with screenshots captured from your own Kali Linux terminal if actual execution evidence is required.


A. uptime command

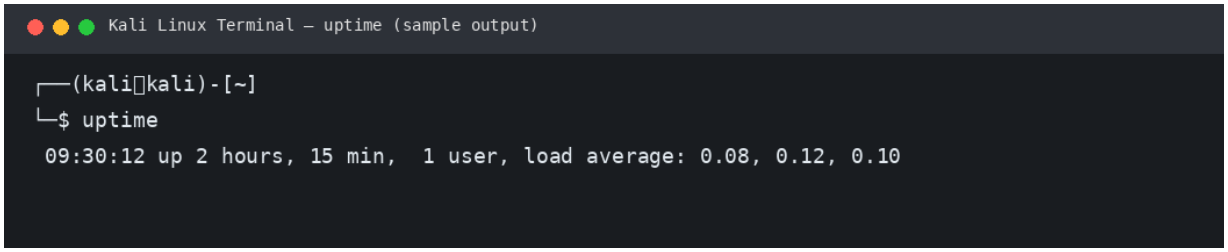

B. date command

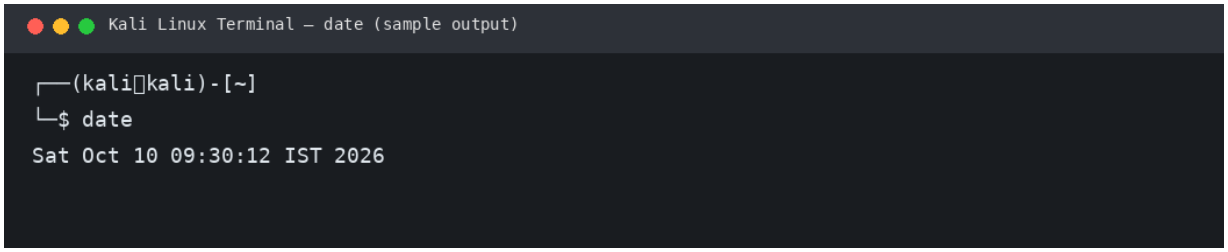

C. mv command

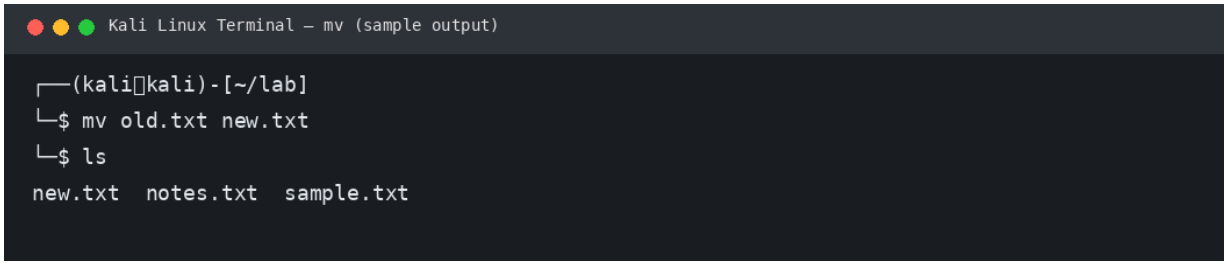

6. Result

Thus, the uptime, date, and mv commands were studied successfully. The uptime command displays system running time and load information, the date command displays the current date and time, and the mv command moves or renames files.