

How to Use the App Launcher

Step 1: Download and Unzip

1. Download the `app.zip` file.
2. Move it to your Desktop.
3. Right-click on the file and select **Extract All** (Windows) or **Open with > Archive Utility** (Mac) to unzip it.

Step 2: Open the App Folder

1. Move the extracted `app` folder to your Desktop.

▲ Important: Do not use the zip file directly. Always extract the folder and move it to your Desktop before proceeding.

2. Open the `app` folder.

You will see several files and folders, including

`app.py`, `requirements.txt`, and two launchers:

- `launcher_windows.bat` (for Windows)
- `launcher_mac.command` (for Mac)

Step 3: Add Your API Key

1. Open the `API.txt` file located in the `app` folder.
2. If you don't have an API key, go to [Groq Console](#) and create an account (or log in if you already have one).
3. Once logged in, click **"Create API Key"** to generate your key. Add any name to it and click the **Submit** button.
4. Copy the generated API key and paste it directly into the `API.txt` file. Save and close the file.


Step 4: Launch the App

For Windows:

1. Double-click `launcher_windows.bat` (a batch file that automates running the app and setting up its environment).
2. Follow the on-screen instructions to install dependencies and run the app.
 **Note:** The first time you run the launcher, it will download Python and all necessary packages, and create a virtual environment. This process may take a few minutes. From the second time onwards, the app will start much faster since the environment is already set up.

For Mac:

1. Right-click `launcher_mac.command` (a script file that automates running the app and setting up its environment on macOS) and select **Open**.
2. Confirm any security prompts if necessary. If an alert like the one below appears, right-click the file and select "Open," or check the instructions on this page: <https://support.apple.com/en-us/102445>

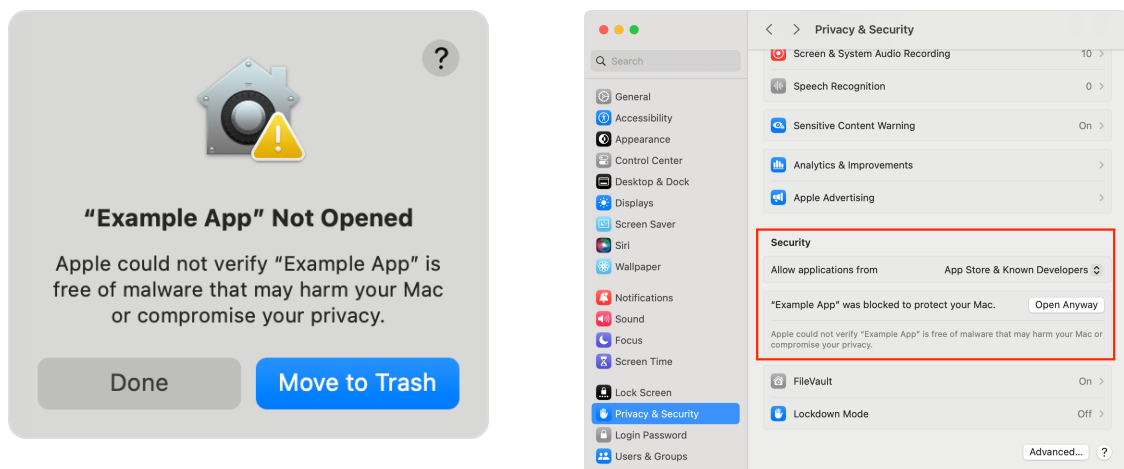

3. Follow the on-screen instructions to install dependencies and run the app.
 **Note:** The first time you run the launcher, it will download Python and all necessary packages, and create a virtual environment. This process may take a few minutes. From the second time onwards, the app will start much faster since the environment is already set up.

Step 5: Close the Terminal / Command Prompt

After closing the web app opened in the browser by the App Launcher, the **Terminal (Mac)** or **Command Prompt (Windows)** will remain open.

To close it, press **Ctrl + C** (the "Control" key and the letter "C") on your keyboard. This will stop the running process and close the app in the terminal / command prompt.

```
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
```

For subsequent launches, you can restart the app by:

- Double-clicking `launcher_Mac.command` (for Mac) or `launcher_Windows.bat` (for Windows).
- Alternatively, right-click the launcher file and select **Open** to start it.

Alternative: Launching the App Manually

For Windows:

1. Open **Command Prompt**:

- Press `Win + R`, type `cmd`, and press Enter.

2. Navigate to the `app` folder:

```
cd Desktop\app
```

3. Create a virtual environment (if not already created):

```
python -m venv venv
```

4. Activate the virtual environment:

```
venv\Scripts\activate
```

5. Install required packages:

```
pip install -r requirements.txt
```

6. Run the app:

```
python app.py
```

For Mac:

1. Open **Terminal**:

- Press `Command + Space`, type `Terminal`, and press Enter.

2. Navigate to the `app` folder:

```
cd ~/Desktop/app
```

3. Create a virtual environment (if not already created):

```
python3 -m venv venv
```

4. Activate the virtual environment:

```
source venv/bin/activate
```

5. Install required packages:

```
pip3 install -r requirements.txt
```

6. Run the Flask app:

```
python3 app.py
```

Notes:

- Ensure you have Python installed on your system.
 - **Windows:** Download from python.org.
 - **Mac:** Python 3 is pre-installed, but ensure it's up to date by running `python3 --version` in Terminal.

- The app should now be running on your local server. If not, open your browser and go to `http://127.0.0.1:5000/` to view it.