




(a) Both quantities rise, monotonically, on the SAME three runs
rank statistic R3 — the column these logs' own `final\_eff\_rank=` line reports

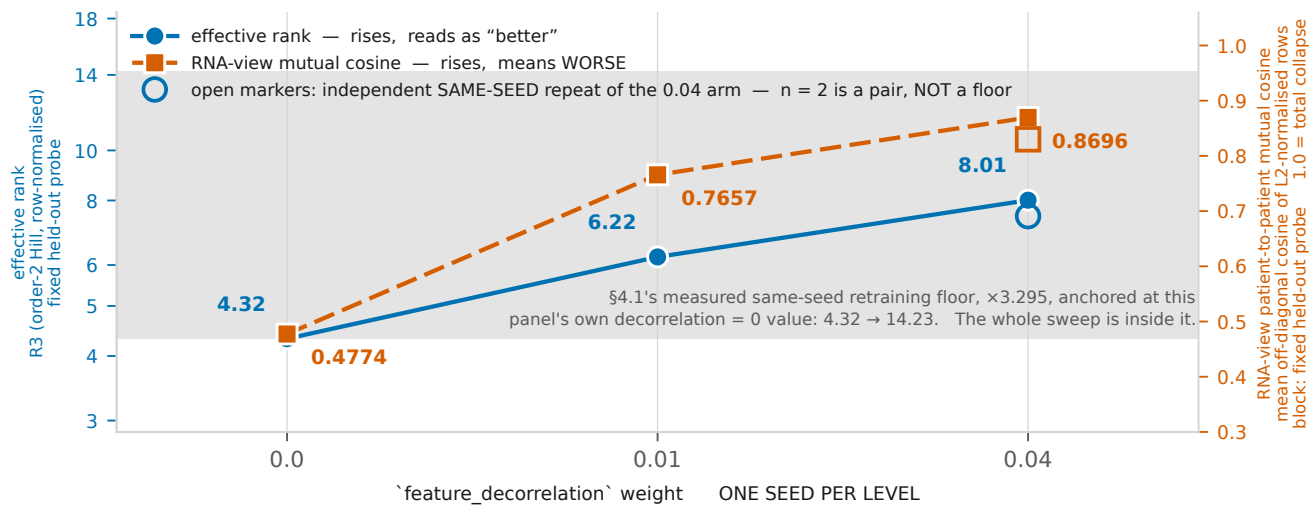


(b) The direction survives the choice of rank statistic
canonical R1 — the statistic §4.1's floor is measured in

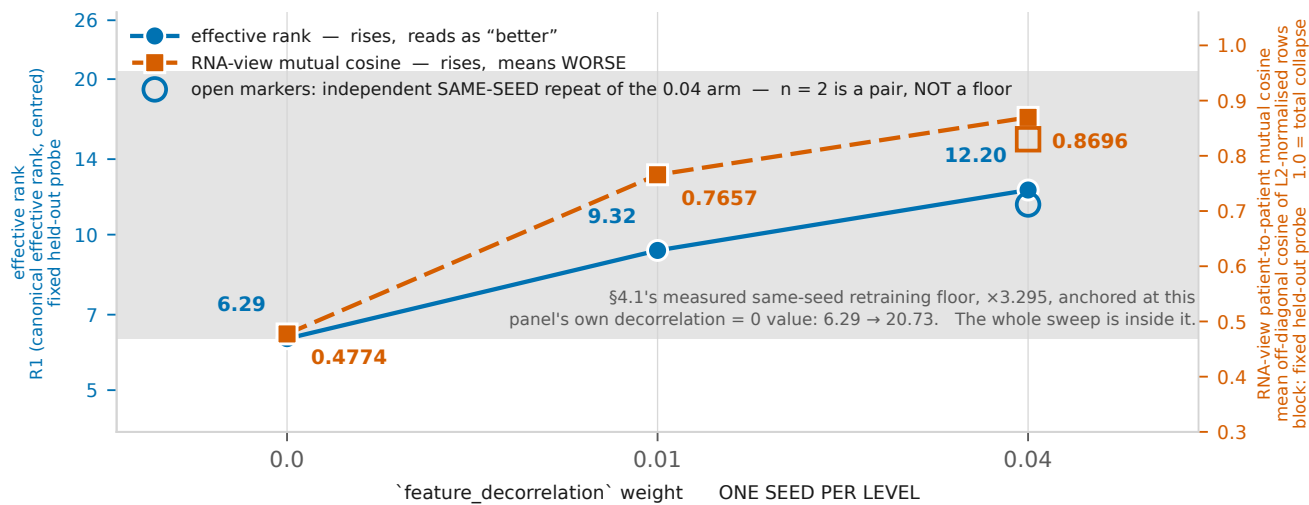

(c) the rank track

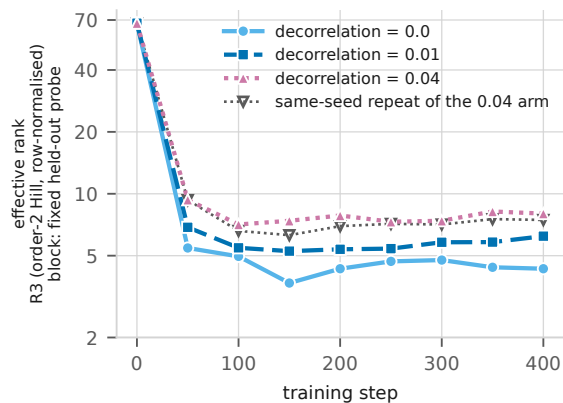

(d) the collapse measure

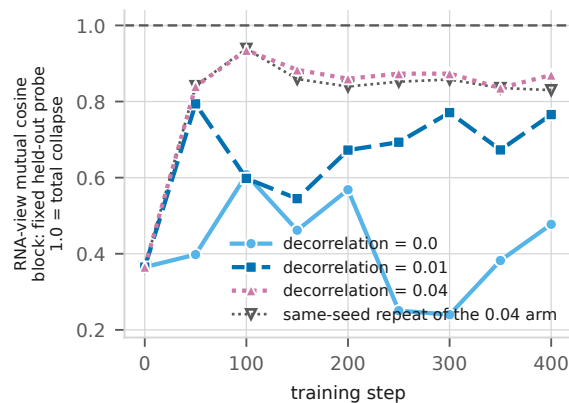

ONE SEED PER LEVEL. The rank change is $\times 1.854$ under R3 and $\times 1.940$ under the canonical statistic — BOTH INSIDE §4.1's $\times 3.295$ same-seed retraining floor, the grey band in (a) and (b). THE MONOTONICITY AND THE CO-MEASURED COSINE CARRY THIS RESULT, NOT THE MAGNITUDE OF THE RANK CHANGE, and no sentence about it may be quoted as though they did.

F9. Draft section 4.9a. Raising the covariance-decorrelation weight raises effective rank monotonically across three levels while the RNA-view patient-to-patient mutual cosine - a direct measurement of the condition rank exists to detect - rises monotonically WITH it, co-measured on the identical runs and printed on the same log lines. At 0.8696 the RNA-view states of different patients are nearly the same vector, and rank moves the wrong way as that worsens. This is a stronger dissociation than draft section 4.9's instances for two reasons about the SHAPE of the evidence rather than its size: it is monotone across three levels rather than a single contrast, and the contradicting quantity is co-measured rather than inferred from a downstream readout in another table. The floor drawn in (a) and (b) is measured on a different arm, a different duration and a different block - canonical R1 on the residualised exported wsi_biology block, programme_only, 40 epochs - and NO floor has been measured on this held-out probe, so the band is indicative; draft section 4.1a rows 48-50. It also carries a correction: "feature_decorrelation is defective" was CONDITIONAL ON A QUERY-WRITTEN QUEUE. Without a momentum key encoder the same term aggravated the collapse (1.59 against 2.17 at step 250, draft section 5.1 instance 3); with one it raises rank. Every claim this project makes about that term needs "in the absence of a momentum key encoder" attached. Statistic and block are named on every axis, and R3 and the canonical statistic occupy separate panels because binding constraint 1 forbids two rank statistics on one axis.