


Removing the node τ_k : the segment launched from τ_k^- must now cover $[\tau_k^-, \tau_k^+]$

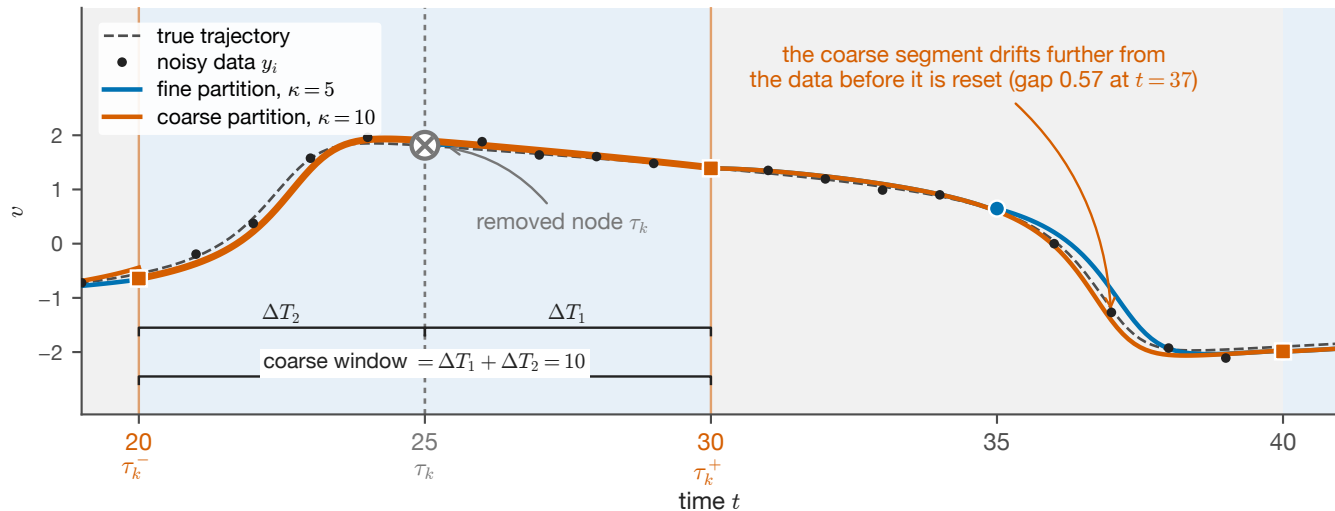

$$\|\hat{\mathcal{J}}_K(p) - \mathcal{J}_K(p)\| \leq 2 |\mathcal{I}_R| C_{\max} \left(e^{L(\Delta T_1 + \Delta T_2)} \|\eta\|_{\max} + e^{L\Delta T_1} \left[\frac{\tilde{L}}{L} (e^{L\Delta T_2} - 1) \|p - p^*\| + \|\eta\|_{\max} \right] \right)$$

$\Delta T_1 = \max_k (\tau_k - \tau_{k-1})$ = fine window length; $\Delta T_2 = \max_k (\tau_k - \tau_k^-)$ = distance from the removed node to its left neighbour (both = 5 here); $|\mathcal{I}_R|$ = number of removed nodes; $C_{\max}$ = largest segment/data magnitude over the affected windows

$L = 3.05$, $\tilde{L} = 10.56$ (Lipschitz in x , in p); $\|\eta\|_{\max} = 0.159$. Background shading: the coarse ($\kappa = 10$) windows.