



Guess propagation: 1-D cost slices along random unit direction u (direction 11 of 12), p^* at $s = 0$


a

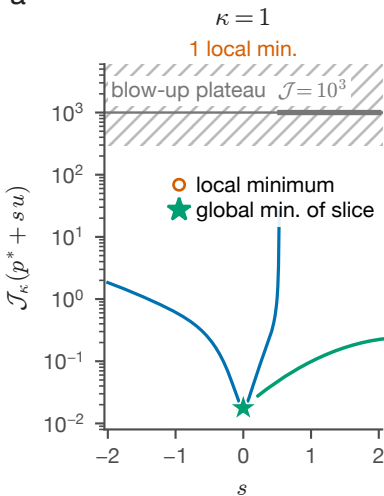


b

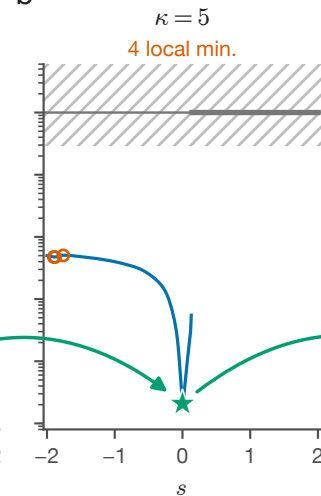

c

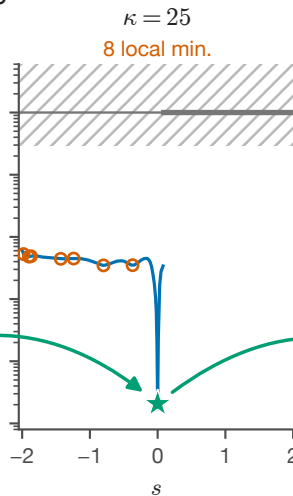

d

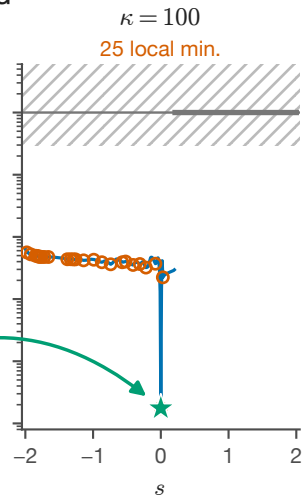

p_{guess} carried forward: each minimiser becomes the next initial guess

$p_{\text{guess}} \leftarrow \text{random}$

for $\kappa = 1, 2, \dots, N$ (a few nodes removed per step)

$p^{(\kappa)} \leftarrow \arg \min \mathcal{J}_\kappa(p)$ starting from p_{guess}

$p_{\text{guess}} \leftarrow p^{(\kappa)}$

end; polish with single shooting ($\kappa = N$) from p_{guess}

Small windows $\Rightarrow$ smooth, nearly convex landscape (1 minimum at $\kappa = 1$).

Large windows $\Rightarrow$ rugged (25 minima at $\kappa = 100$).

The minimiser is carried into each rougher landscape instead of restarting.