


Tibbles - an enhanced data frame



The **tibble** package provides a new S3 class for storing tabular data, the tibble. Tibbles inherit the data frame class, but improve three behaviors:

- **Subsetting** - `[` always returns a new tibble, `[[` and `$` always return a vector.
- **No partial matching** - You must use full column names when subsetting
- **Display** - When you print a tibble, R provides a concise view of the data that fits on one screen

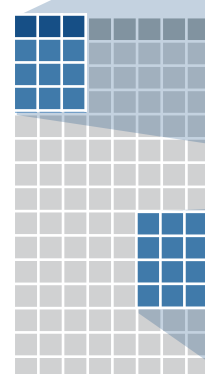

A large table to display

```
# A tibble: 234 x 6
  manufacturer <chr> model <chr> displ <dbl>
1 audi a4 1.8 1.8
2 audi a4 2.0 2.0
3 audi a4 2.0 2.0
4 audi a4 2.0 2.0
5 audi a4 2.0 2.0
6 audi a4 2.0 2.0
7 audi a4 2.0 2.0
8 audi a4 2.0 2.0
9 audi a4 2.0 2.0
10 audi a4 2.0 2.0
... with 224 more rows, and 3
more variables: year <int>,
cyl <int>, trans <chr>
```

tibble display

```
156 1999 6 auto(l4)
157 1999 6 auto(l4)
158 2008 6 auto(l4)
159 2008 8 auto(s4)
160 1999 4 manual(m5)
161 1999 4 auto(l4)
162 2008 4 manual(m5)
163 2008 4 manual(m5)
164 2008 4 auto(l4)
165 2008 4 auto(l4)
166 1999 4 auto(l4)
[ reached getOption("max.print")
-- omitted 68 rows --]
```

data frame display

- Control the default appearance with options:
`options(tibble.print_max = n, tibble.print_min = m, tibble.width = Inf)`
- View full data set with **View()** or **glimpse()**
- Revert to data frame with **as.data.frame()**

CONSTRUCT A TIBBLE IN TWO WAYS

tibble(...)
Construct by columns.
`tibble(x = 1:3, y = c("a", "b", "c"))`

tribble(...)
Construct by rows.
`tribble(~x, ~y, 1, "a", 2, "b", 3, "c")`

```
A tibble: 3 x 2
  x     y
<int> <chr>
1     1 a
2     2 b
3     3 c
```

Both make this tibble

as_tibble(x, ...) Convert data frame to tibble.


enframe(x, name = "name", value = "value")
Convert named vector to a tibble

is_tibble(x) Test whether x is a tibble.


Tidy Data with tidyr

Tidy data is a way to organize tabular data. It provides a consistent data structure across packages.

A table is tidy if:




Each **variable** is in its own **column**




Each **observation**, or **case**, is in its own **row**

Tidy data:



Makes variables easy to access as vectors



Preserves cases during vectorized operations

Reshape Data - change the layout of values in a table

Use **gather()** and **spread()** to reorganize the values of a table into a new layout.

gather(data, key, value, ..., na.rm = FALSE, convert = FALSE, factor_key = FALSE)

gather() moves column names into a **key** column, gathering the column values into a single **value** column.

table4a

country	1999	2000
A	0.7K	2K
B	37K	80K
C	212K	213K

country	year	cases
A	1999	0.7K
B	1999	37K
C	1999	212K
A	2000	2K
B	2000	80K
C	2000	213K

key value

`gather(table4a, `1999`, `2000`, key = "year", value = "cases")`

spread(data, key, value, fill = NA, convert = FALSE, drop = TRUE, sep = NULL)

spread() moves the unique values of a **key** column into the column names, spreading the values of a **value** column across the new columns.

table2

country	year	type	count
A	1999	cases	0.7K
A	1999	pop	19M
A	2000	cases	2K
A	2000	pop	20M
B	1999	cases	37K
B	1999	pop	172M
B	2000	cases	80K
B	2000	pop	174M
C	1999	cases	212K
C	1999	pop	1T
C	2000	cases	213K
C	2000	pop	1T

key value

`spread(table2, type, count)`

country	year	cases	pop
A	1999	0.7K	19M
A	2000	2K	20M
B	1999	37K	172M
B	2000	80K	174M
C	1999	212K	1T
C	2000	213K	1T

Handle Missing Values

drop_na(data, ...)

Drop rows containing NA's in ... columns.

x1	x2
A	1
B	NA
C	NA
D	3
E	NA

`drop_na(x, x2)`

fill(data, ..., .direction = c("down", "up"))

Fill in NA's in ... columns with most recent non-NA values.

x1	x2
A	1
B	NA
C	NA
D	3
E	NA

`fill(x, x2)`

replace_na(data, replace = list(), ...)

Replace NA's by column.

x1	x2
A	1
B	NA
C	NA
D	3
E	NA

`replace_na(x, list(x2 = 2))`

Expand Tables - quickly create tables with combinations of values

complete(data, ..., fill = list())

Adds to the data missing combinations of the values of the variables listed in ...

`complete(mtcars, cyl, gear, carb)`


expand(data, ...)

Create new tibble with all possible combinations of the values of the variables listed in ...

`expand(mtcars, cyl, gear, carb)`

Split Cells

Use these functions to split or combine cells into individual, isolated values.



separate(data, col, into, sep = "[^:alnum:]", remove = TRUE, convert = FALSE, extra = "warn", fill = "warn", ...)

Separate each cell in a column to make several columns.

table3

country	year	rate
A	1999	0.7K/19M
A	2000	2K/20M
B	1999	37K/172M
B	2000	80K/174M
C	1999	212K/1T
C	2000	213K/1T

country	year	cases	pop
A	1999	0.7K	19M
A	2000	2K	20M
B	1999	37K	172
B	2000	80K	174
C	1999	212K	1T
C	2000	213K	1T

`separate(table3, rate, sep = "/", into = c("cases", "pop"))`

separate_rows(data, ..., sep = "[^:alnum:]."]
+, convert = FALSE)

Separate each cell in a column to make several rows.

table3

country	year	rate
A	1999	0.7K/19M
A	2000	2K/20M
B	1999	37K/172M
C	1999	212K/1T
C	2000	213K/1T

country	year	rate
A	1999	0.7K
A	1999	19M
A	2000	2K
A	2000	20M
B	1999	37K
B	1999	172M
B	2000	80K
B	2000	174M
C	1999	212K
C	1999	1T
C	2000	213K
C	2000	1T

`separate_rows(table3, rate, sep = "/")`

unite(data, col, ..., sep = "_", remove = TRUE)

Collapse cells across several columns to make a single column.

table5

country	century	year
Afghan	19	99
Afghan	20	00
Brazil	19	99
Brazil	20	00
China	19	99
China	20	00

country	year
Afghan	1999
Afghan	2000
Brazil	1999
Brazil	2000
China	1999
China	2000

`unite(table5, century, year, col = "year", sep = "")`