



CREAR UN REPOSITORIO EN GITHUB

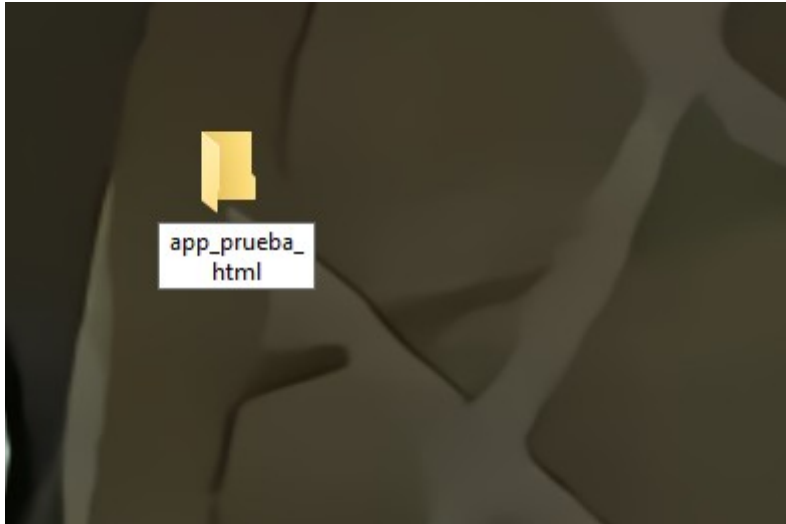

2. Iniciamos la creación de la carpeta .init

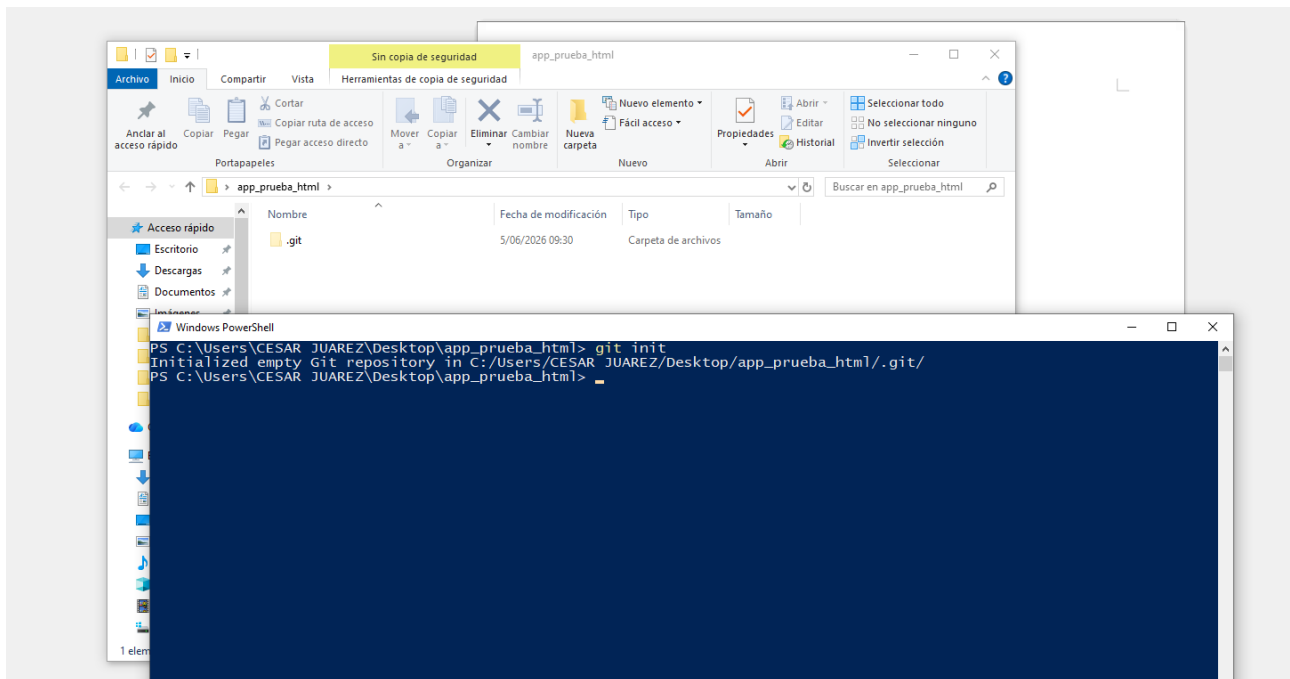

Windows PowerShell


```
PS C:\Users\CESAR JUAREZ\Desktop\app_prueba_html> git init
Initialized empty Git repository in C:/Users/CESAR JUAREZ/Desktop/app_prueba_html/.git/
PS C:\Users\CESAR JUAREZ\Desktop\app_prueba_html> git add .
PS C:\Users\CESAR JUAREZ\Desktop\app_prueba_html>
```



Windows PowerShell

```
PS C:\Users\CESAR JUAREZ\Desktop\app_prueba_html> git init
Initialized empty Git repository in C:/Users/CESAR JUAREZ/Desktop/app_prueba_html/.git/
PS C:\Users\CESAR JUAREZ\Desktop\app_prueba_html> git add .
PS C:\Users\CESAR JUAREZ\Desktop\app_prueba_html> git commit -m "Iniciando el repositorio"
On branch master

Initial commit

nothing to commit (create/copy files and use "git add" to track)
PS C:\Users\CESAR JUAREZ\Desktop\app_prueba_html>
```

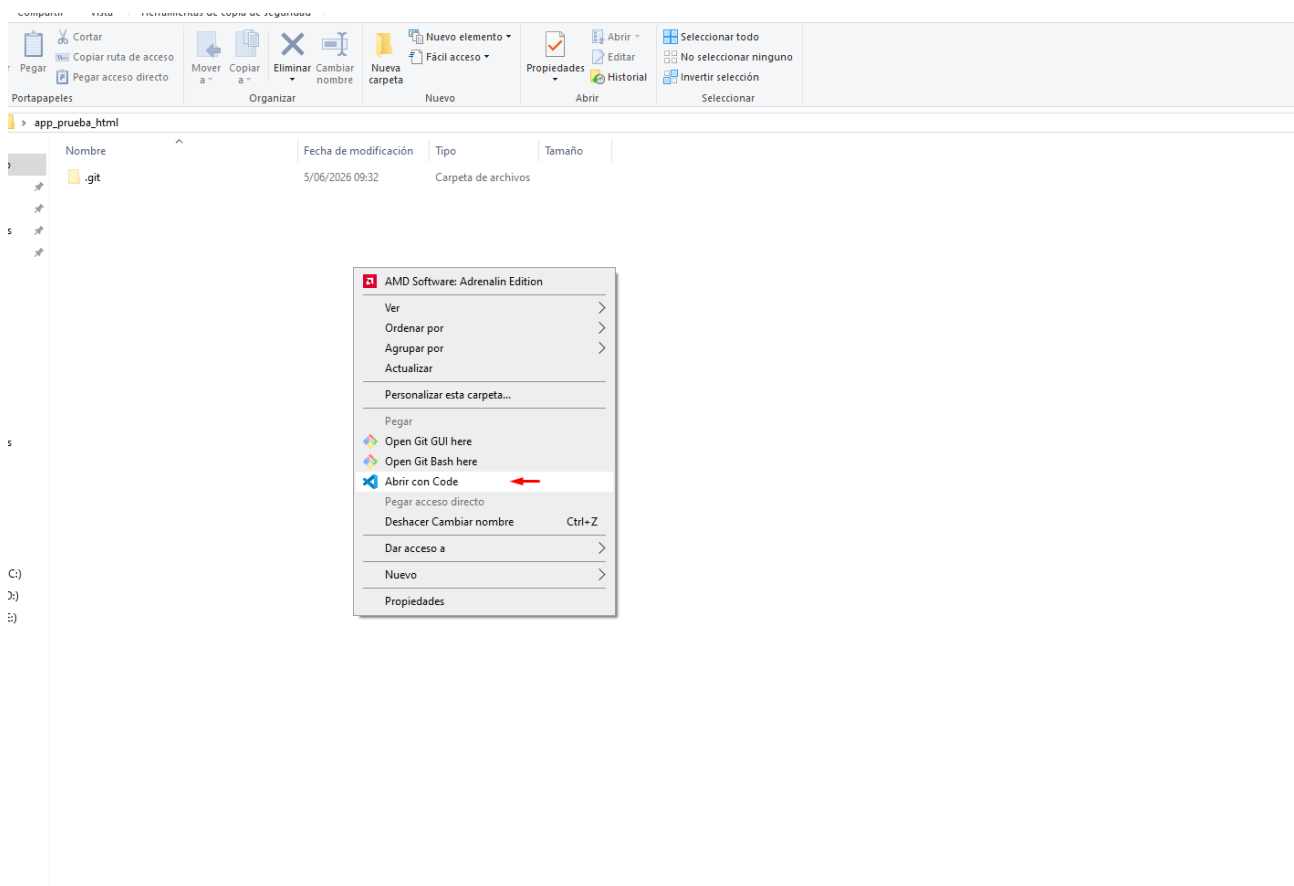

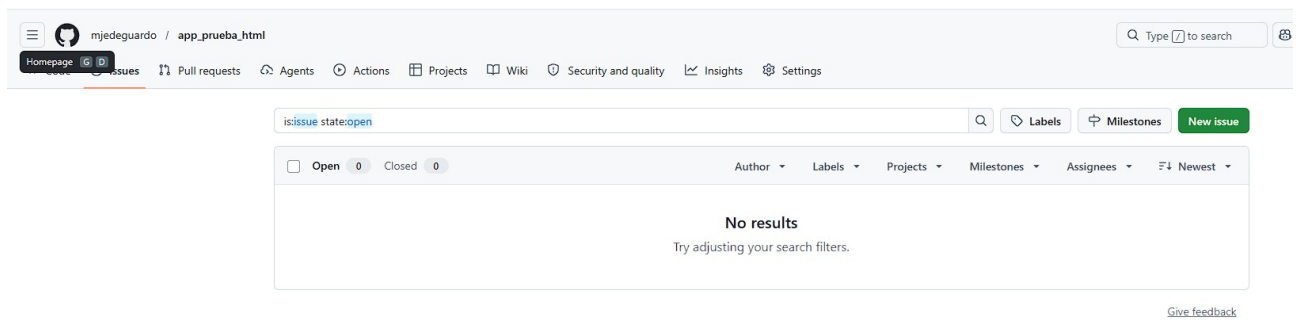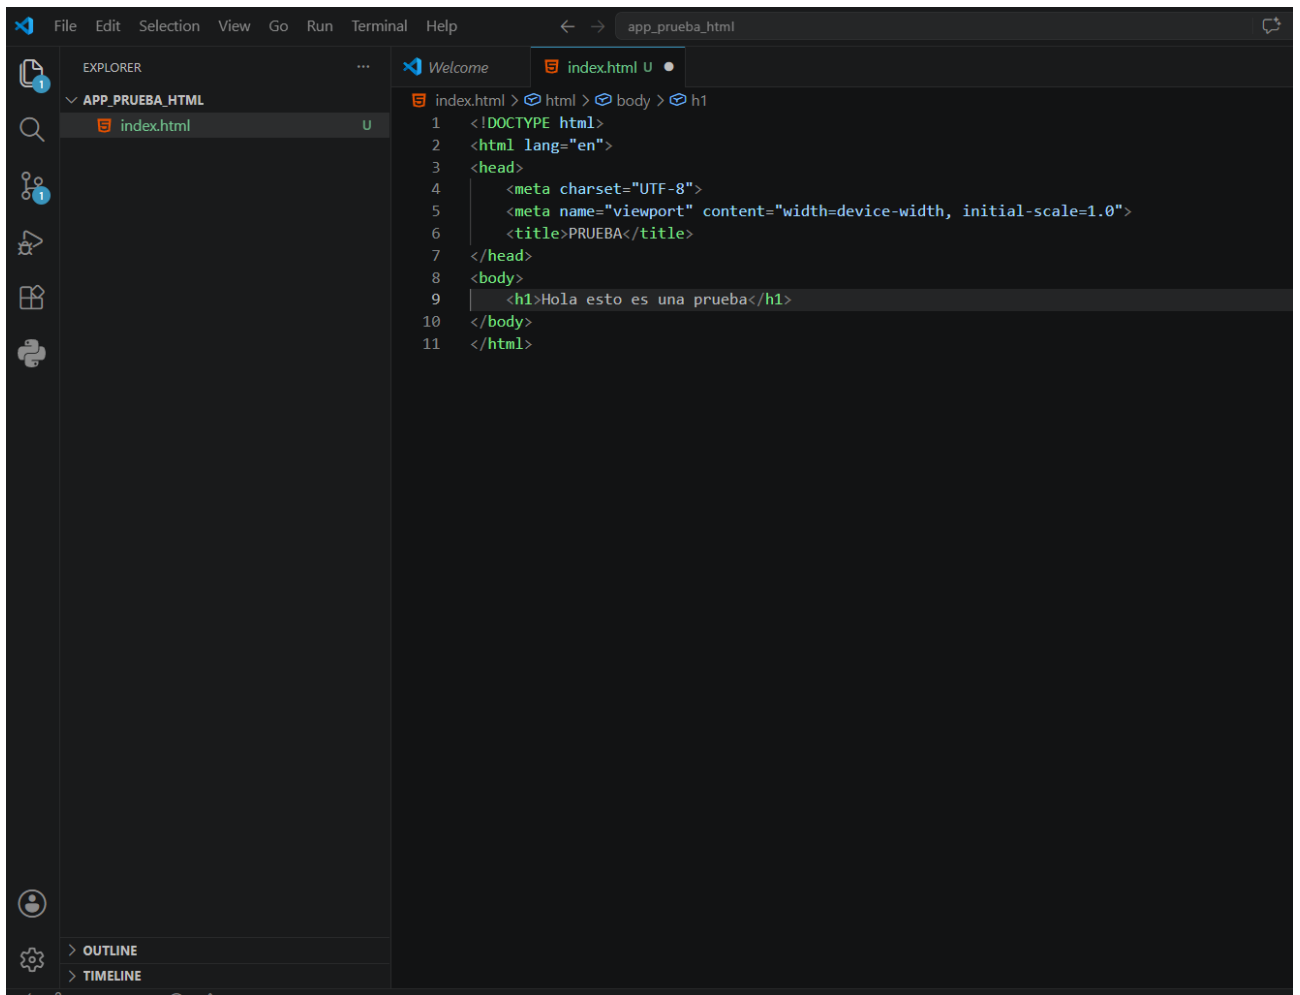

```
Enumerating objects: 3, done.  
Counting objects: 100% (3/3), done.  
Delta compression using up to 8 threads  
Compressing objects: 100% (2/2), done.  
Writing objects: 100% (3/3), 377 bytes | 62.00 KiB/s, done.  
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)  
To https://github.com/mjedeguardo/app_prueba_html.git  
* [new branch]      main -> main  
branch 'main' set up to track 'origin/main'.  
PS C:\Users\CESAR JUAREZ\Desktop\app_prueba_html> █
```

```
PS C:\Users\CESAR JUAREZ\Desktop\app_prueba_html> git push -u origin main  
Enumerating objects: 3, done.  
Counting objects: 100% (3/3), done.  
Delta compression using up to 8 threads  
Compressing objects: 100% (2/2), done.  
Writing objects: 100% (3/3), 377 bytes | 62.00 KiB/s, done.  
Total 3 (delta 0), reused 0 (delta 0), pack-reused 0 (from 0)  
To https://github.com/mjedeguardo/app_prueba_html.git  
* [new branch]      main -> main  
branch 'main' set up to track 'origin/main'.  
PS C:\Users\CESAR JUAREZ\Desktop\app_prueba_html> █
```

