

Data Visualization with ggplot2 (part 1)

An introduction to the grammar of graphics

by Martin Frigaard

Written: September 21 2021

Updated: November 26 2021

[Created using the "λέξις" theme](#)

ggplot2: Build a data MASTERpiece



Intro to Data Visualization with R with ggplot2 (part 1)





Objectives

- 1) Introduce the grammar of graphics
- 2) Identifying graph aesthetics
- 3) Recognizing and using **geoms**
- 4) Faceting graphs



Resources

Link to slides

<https://mjfrigaard.github.io/csuc-data-journalism/slides.html>

Link to exercises

<https://mjfrigaard.github.io/csuc-data-journalism/lessons-exercises.html>

Why use `ggplot2` for data visualization?



- 1) `ggplot2` provides a comprehensive grammar for creating graphs/figures
- 2) It works hand-and-hand with the `tidyverse`
- 3) Better plots = better communication



Why do we create data visualizations?

Exploration and Clarification

"The simple graph has brought more information to the data analyst's mind than any other device." - John Tukey



Why do we create data visualizations?

Better decision making

"Data visualization is a collection of methods that use visual representations to explore, make sense of, and communicate quantitative data... the ultimate purpose of data visualization, beyond understanding, is to enable better decisions and actions." - Stephen Few



How should we start creating data visualizations?

Start with pen and paper

get those first (bad) ideas out of the way

Import and inspect your data

so you know what to expect

Layered grammar of graphics



*"appreciating the engineering design behind a sentence – **a linear ordering of phrases which conveys a gnarly network of ideas** – is the key to understanding what you are trying to accomplish when you compose a sentence."* - Stephen Pinker

"language is a system for making infinite use of finite means." - Wilhelm von Humboldt

ggplot2 is a language of layers, organized linearly

The layers give us a "*linear ordering of phrases*" to build an infinite number of graphs ("*which convey a gnarly network of ideas.*")

...infinitely extensible



Let's load some data!

The [NHANES](#) package comes with data from the [2014 American National Health and Nutrition Examination surveys](#). We will load a sample from it below:

```
SmallNhances <- read_csv("https://bit.ly/nhanes-small")
head(SmallNhances)
```

ID	Gender	Age	AgeDecade	Race1	HealthGen	Height	BMI	Weight
<dbl>	<chr>	<dbl>	<chr>	<chr>	<chr>	<dbl>	<dbl>	<dbl>
51624	male	34	30-39	White	Good	164.7	32.22	87.4
51624	male	34	30-39	White	Good	164.7	32.22	87.4
51624	male	34	30-39	White	Good	164.7	32.22	87.4
51625	male	4	0-9	Other	NA	105.4	15.30	17.0
51630	female	49	40-49	White	Good	168.4	30.57	86.7
51638	male	9	0-9	White	NA	133.1	16.82	29.8

6 rows | 1-9 of 11 columns

Quick Tip: Column Names



Standardize names

```
SmallNhances <- SmallNhances %>% janitor::clean_names()  
head(SmallNhances)
```

id	gender	age	age_decade	race1	health_gen	height	bmi	weight
<dbl>	<chr>	<dbl> <chr>		<chr>	<chr>	<dbl>	<dbl>	<dbl>
51624	male	34	30-39	White	Good	164.7	32.22	87.4
51624	male	34	30-39	White	Good	164.7	32.22	87.4
51624	male	34	30-39	White	Good	164.7	32.22	87.4
51625	male	4	0-9	Other	NA	105.4	15.30	17.0
51630	female	49	40-49	White	Good	168.4	30.57	86.7
51638	male	9	0-9	White	NA	133.1	16.82	29.8

6 rows | 1-9 of 11 columns

Quick Tip: Factors

Format factors: We have a `health_gen` variable with the following levels:

`Excellent`, `Vgood`, `Good`, `Fair`, or `Poor`. These are ordered.



```
SmallNhances <-  
  SmallNhances %>% mutate(  
    health_gen = factor(x = health_gen,  
      levels = c("Poor", "Fair",  
                "Good", "Vgood",  
                "Excellent"),  
      ordered = TRUE))
```

```
levels(SmallNhances$health_gen)
```

```
[1] "Poor"       "Fair"        "Good"        "Vgood"       "Excellent"
```

Layered grammar of graphics



How it works:

- 1) Graphs are *initialized* with `ggplot()`**
- 2) Variables are *mapped* to *aesthetics***
- 3) Geoms are linked to *statistics***

Our First Graph



*What relationship do you expect to see between **height** and **weight**?*

1. Use data with pipe to initialize graph

```
SmallNhanes %>%
```

2. Map variables to aesthetics

```
SmallNhanes %>%  
ggplot(mapping = aes(x = weight, y = height))
```

3. Add geoms and layers

```
SmallNhanes %>%  
ggplot(mapping = aes(x = weight, y = height)) +  
geom_point()
```




```
SmallNhanes %>%  
  ggplot() # initialize
```




```
SmallNhanes %>%
```

```
  ggplot(mapping = aes(x = weight, y = height)) # map variables
```

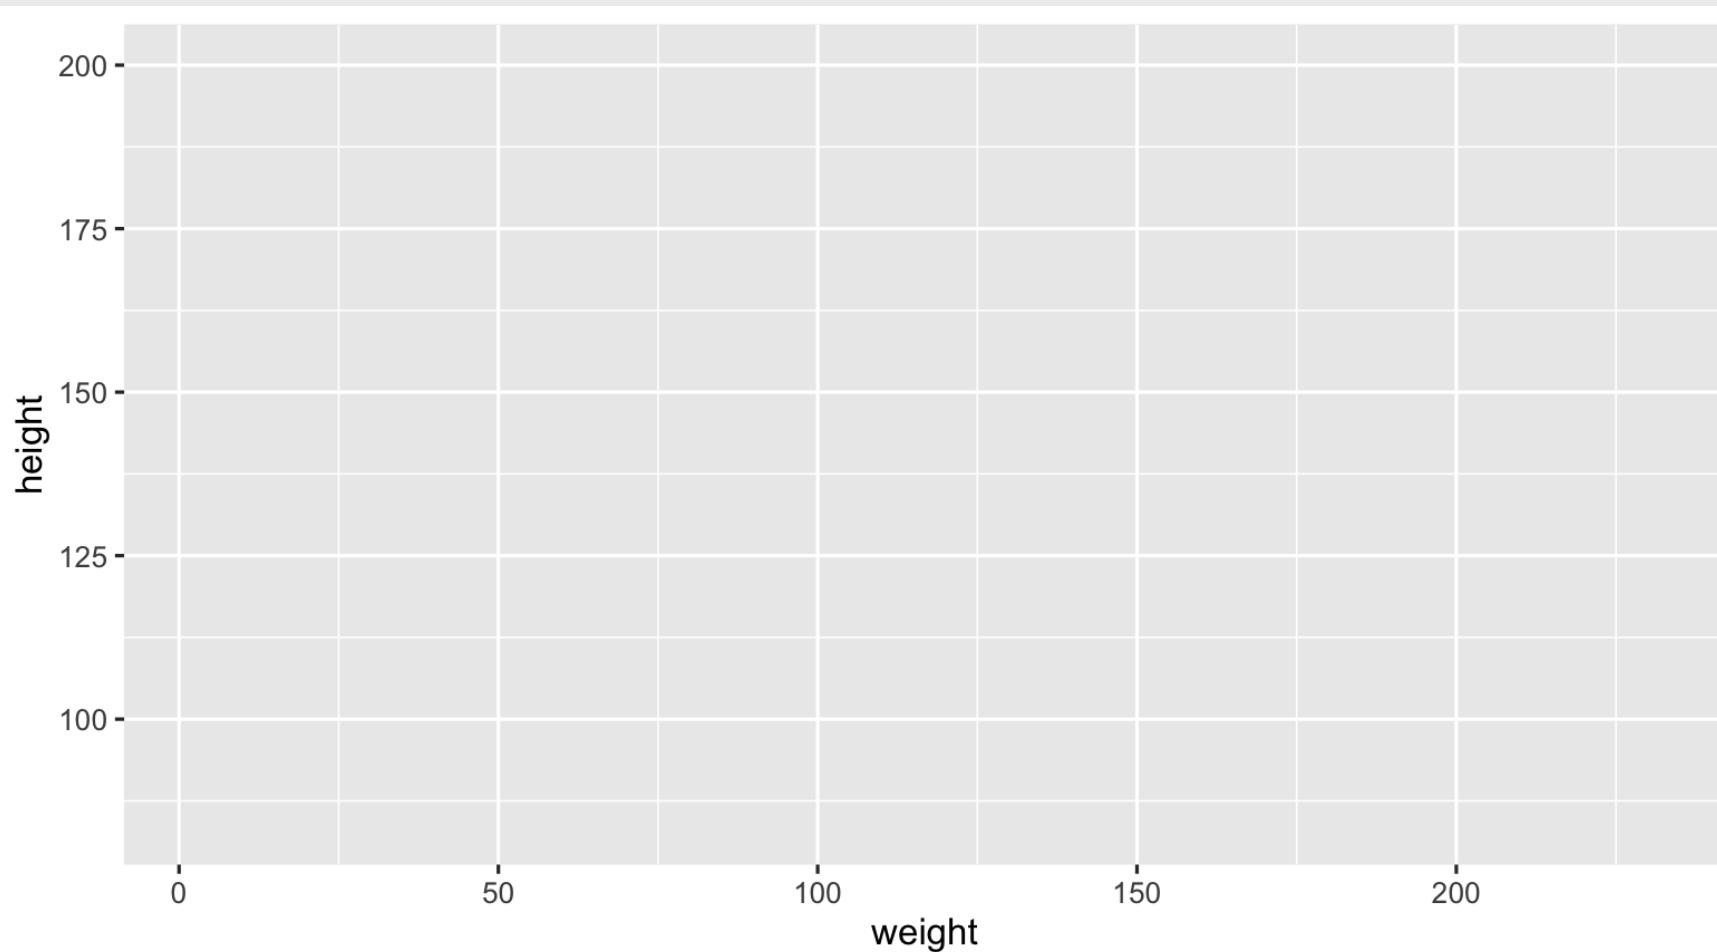

```
SmallNhanes %>%
```

```
  ggplot(mapping = aes(x = weight, y = height)) +  
    geom_point() # add geoms
```

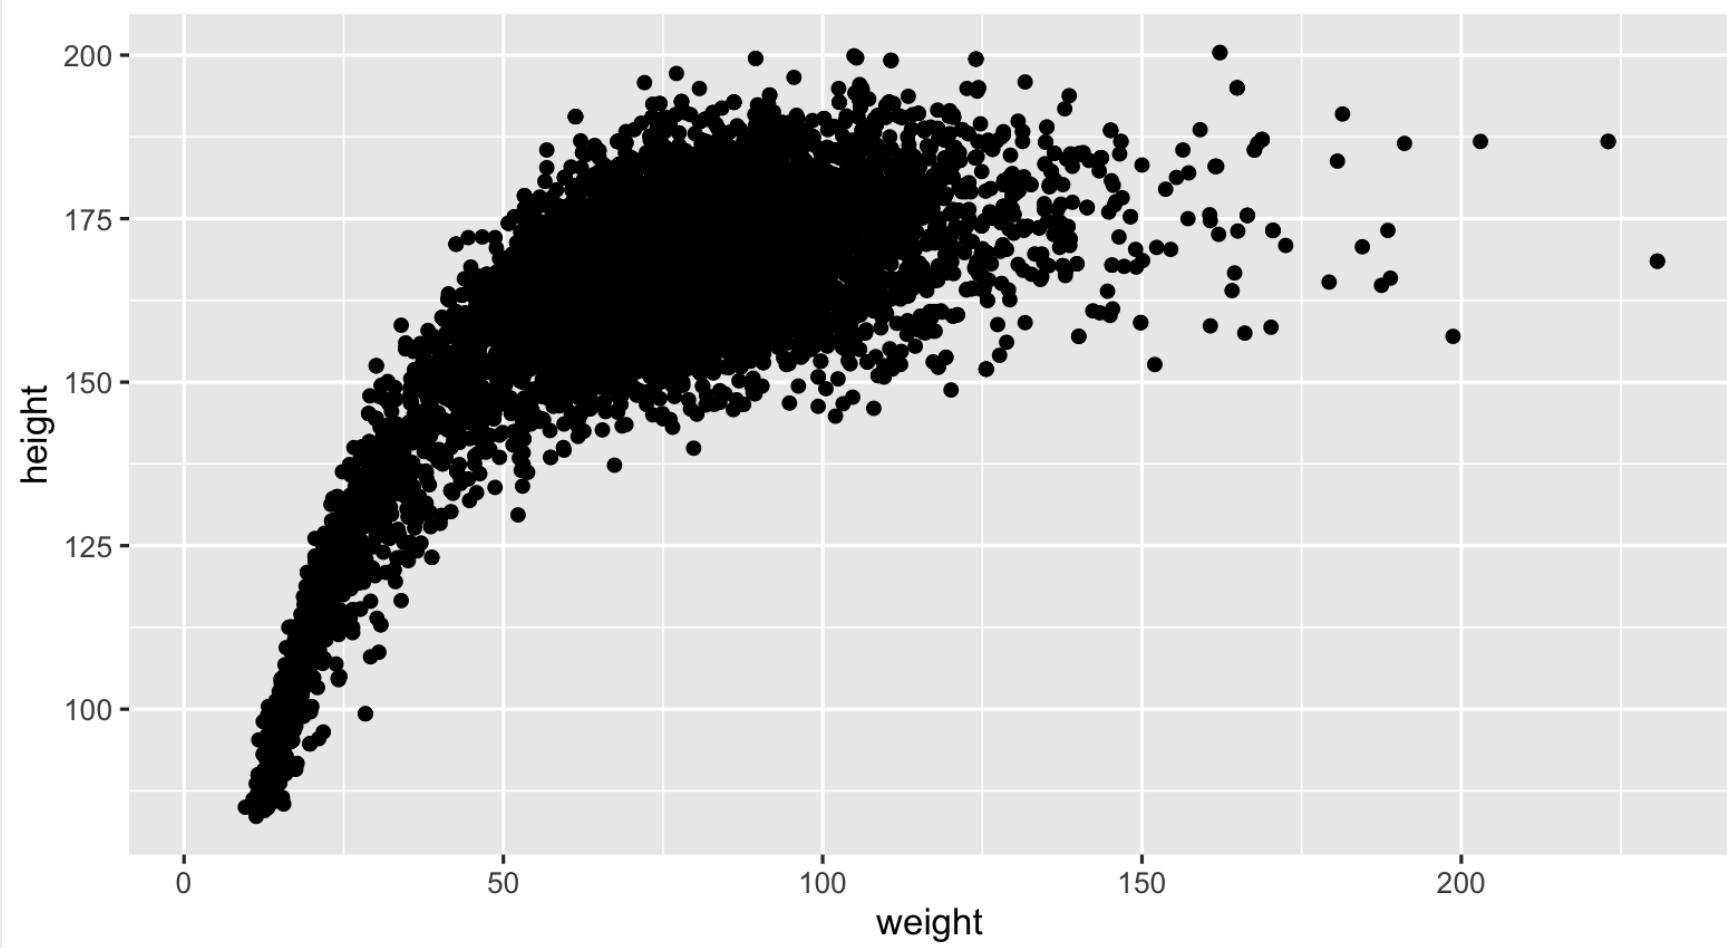



ggplot2 template

Initialize the plot the `ggplot()`, map the aesthetics, and add a `<GEOM_FUNCTION>`

```
<DATA> %>%  
  ggplot(mapping = aes(<MAPPINGS>)) +  
  <GEOM_FUNCTION>()
```

We can add more aesthetics *inside* geoms

```
<DATA> %>%  
  ggplot(mapping = aes(<MAPPINGS>)) +  
  <GEOM_FUNCTION>(mapping = aes(<MAPPINGS>))
```



ggplot2 template

Because **ggplot2** is a language of layers, we can continue adding *more* geoms

```
<DATA> %>%  
  ggplot(mapping = aes(<MAPPINGS>)) +  
  <GEOM_FUNCTION>(mapping = aes(<MAPPINGS>)) +  
  <GEOM_FUNCTION>(mapping = aes(<MAPPINGS>))
```

Note the different syntax (**%>%** vs. **+**)

```
<DATA> %>% #<< pipe!  
  ggplot(mapping = aes(<MAPPINGS>)) + #<< plus!  
  <GEOM_FUNCTION>(mapping = aes(<MAPPINGS>))
```

Graph Aesthetics






Aesthetics

Is the relationship between **weight** and **height** the same for both **genders**?

We can explore this by mapping the variables to different aesthetics

Aesthetics as graph elements (**color**, **size**, **shape**, and **alpha**)

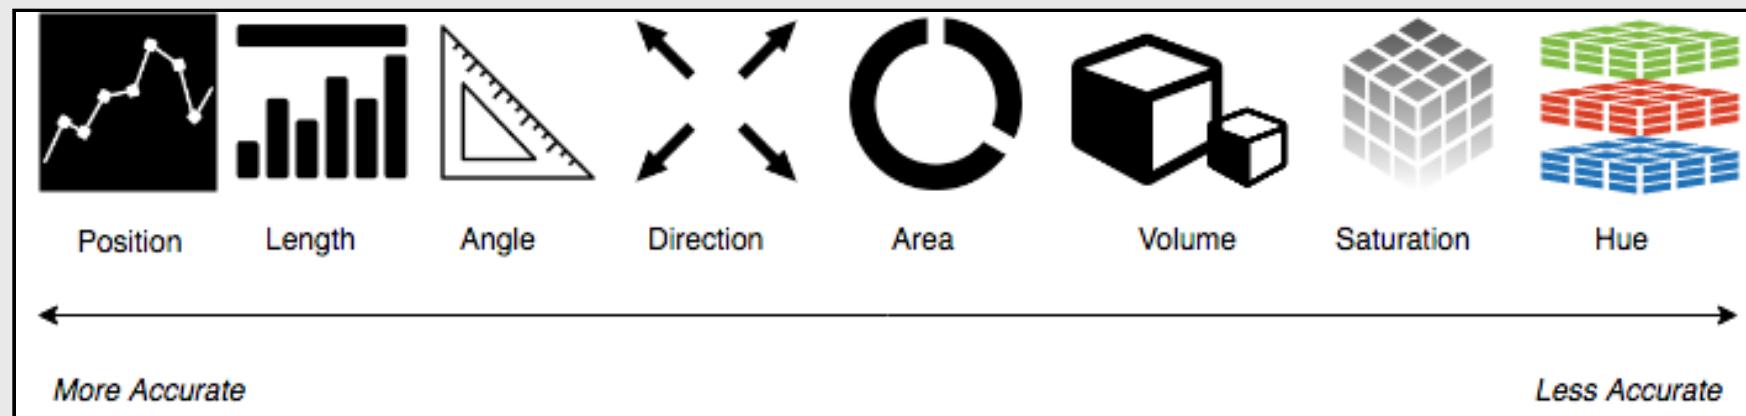


Mapping (global vs. local)





Global ggplot2 mapping


inside the `ggplot()` function = setting variables ***globally***

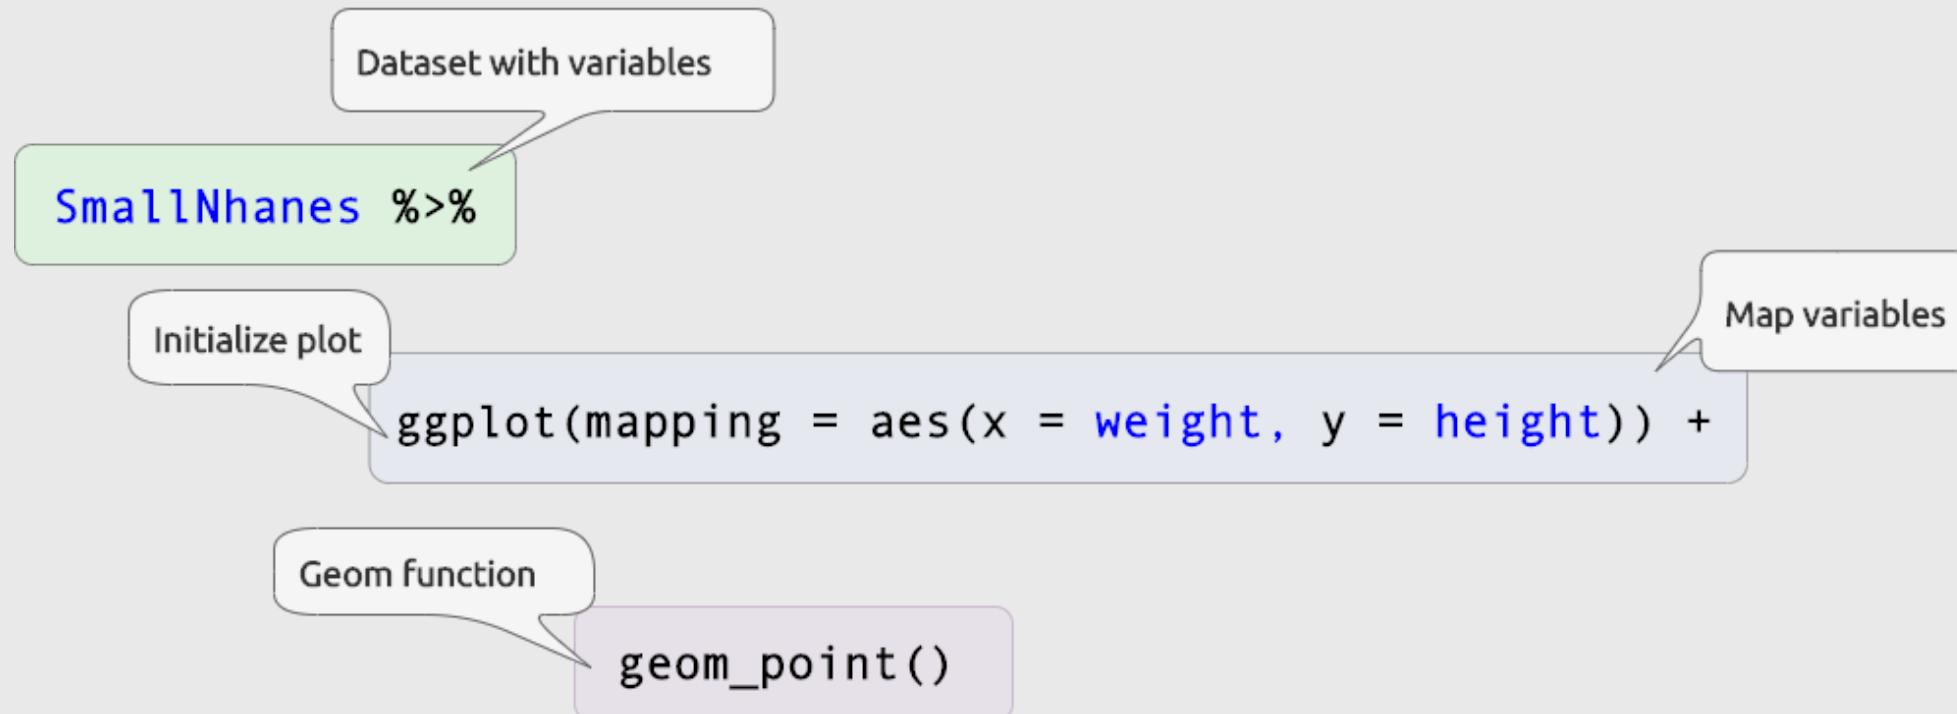



Local ggplot2 mapping

inside the geom() function = setting variables ***locally***

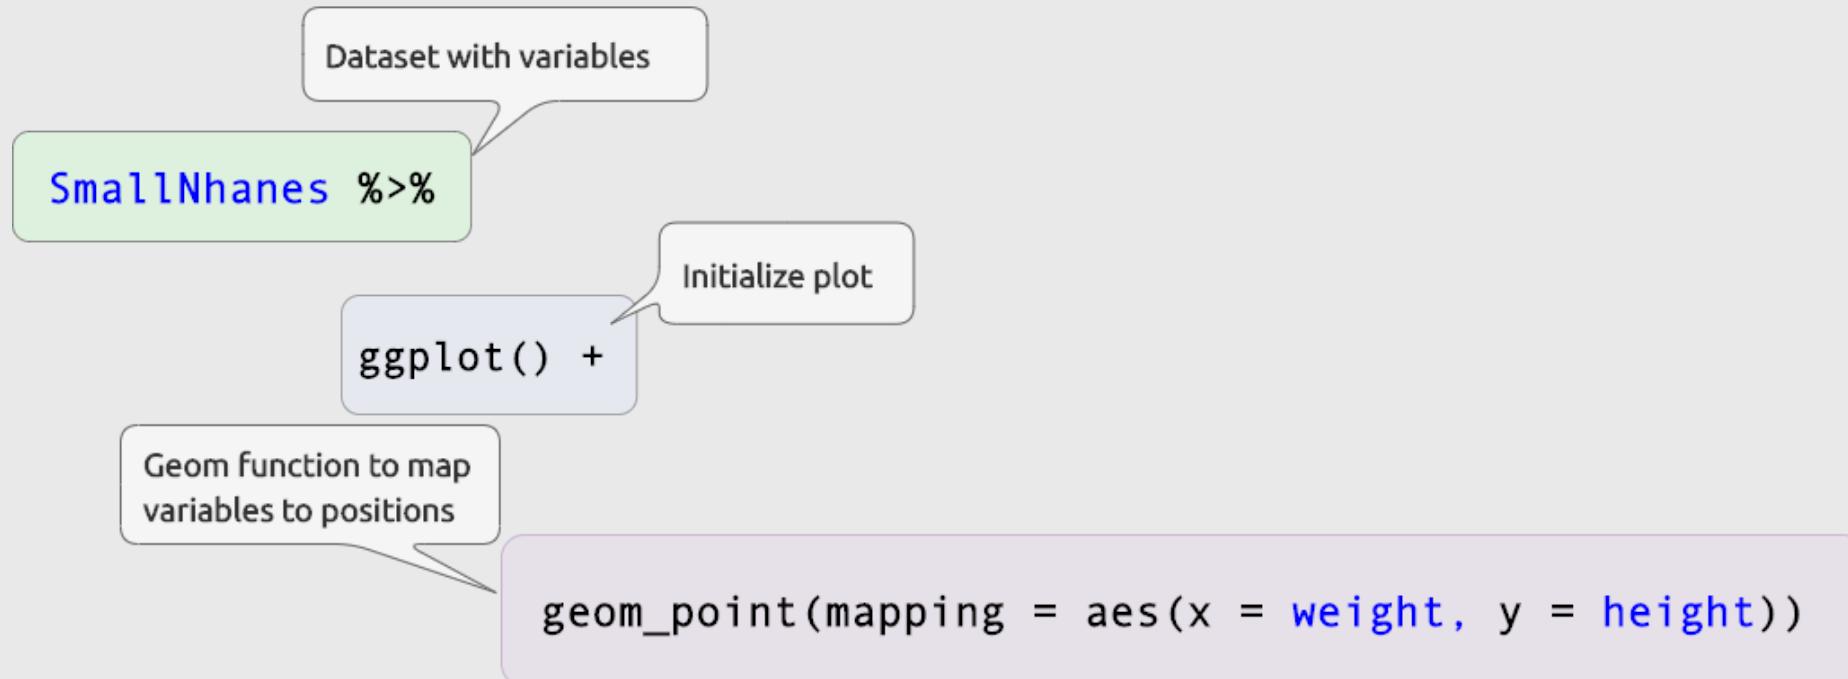



Your Turn

Set local vs. global aesthetic mappings


From here...

```
SmallNhanes %>%
  ggplot(
    mapping =
      aes(x = weight, y = height)) +
  geom_point() +
  geom_smooth()
```

...to here.

```
SmallNhanes %>%
  ggplot() +
  geom_point(
    mapping =
      aes(x = weight, y = height)) +
  geom_smooth(
    mapping =
      aes(x = weight, y = height))
```

Your Turn (solution 1)



```
SmallNhances %>%
  ggplot(mapping = aes(x = weight, y = height)) +
  geom_point() +
  geom_smooth()
```

Your Turn (solution 2)



```
SmallNhances %>%
  ggplot() +
  geom_point(mapping = aes(x = weight, y = height)) +
  geom_smooth(mapping = aes(x = weight, y = height))
```

Variables, Aesthetics, and Geoms





Variables, Aesthetics, and Geoms (1)

Each graph needs a variable or value, an aesthetic, and geom (the accompanying graphic, geometry)

```
geom_point(mapping = aes(x = weight, y = height)) + # layer 1  
geom_smooth(mapping = aes(x = weight, y = height)) # layer 2
```

variable	aesthetic	geom
weight	position = x	dots = point
height	position = y	dots = point
weight	position = x	line = smooth
height	position = y	line = smooth

These have the same aesthetics! What if we added a layer with a variable mapped to a different aesthetic?

Variables, Aesthetics, and Geoms (2)



But we can add *more* variables, map them to *different* aesthetics, and *adding* another `geom` layer

Add another layer, coloring the points by `gender`

```
SmallNhanes %>%
  ggplot() +
  geom_point(mapping = aes(x = weight, y = height)) +
  geom_point(mapping = aes(color = gender))
```

variable	aesthetic	geom
weight	position = <code>x</code>	dots = <code>point</code>
height	position = <code>y</code>	dots = <code>point</code>
gender	color = <code>color</code>	dots = <code>point</code>

Variables, Aesthetics, and Geoms (3)



ERROR!

```
SmallNhanes %>%
  ggplot() +
  geom_point(
    aes(x = weight, y = height)) +
  geom_point(
    aes(color = gender))
```

*# Error: geom_point requires the following
missing aesthetics: x and y*

SOLUTION

All **geoms** have required aesthetics--
map variables globally

```
SmallNhanes %>%
  ggplot(
    aes(x = weight, y = height)) +
  geom_point(aes(color = gender))
```

Aesthetics: color


```
SmallNhanes %>%
```

```
  ggplot(aes(x = weight, y = height)) +  
    geom_point(aes(color = gender))
```



Aesthetics: size


```
SmallNhanes %>%
  ggplot(aes(x = weight, y = height)) +
  geom_point(aes(color = gender, size = gender))
```

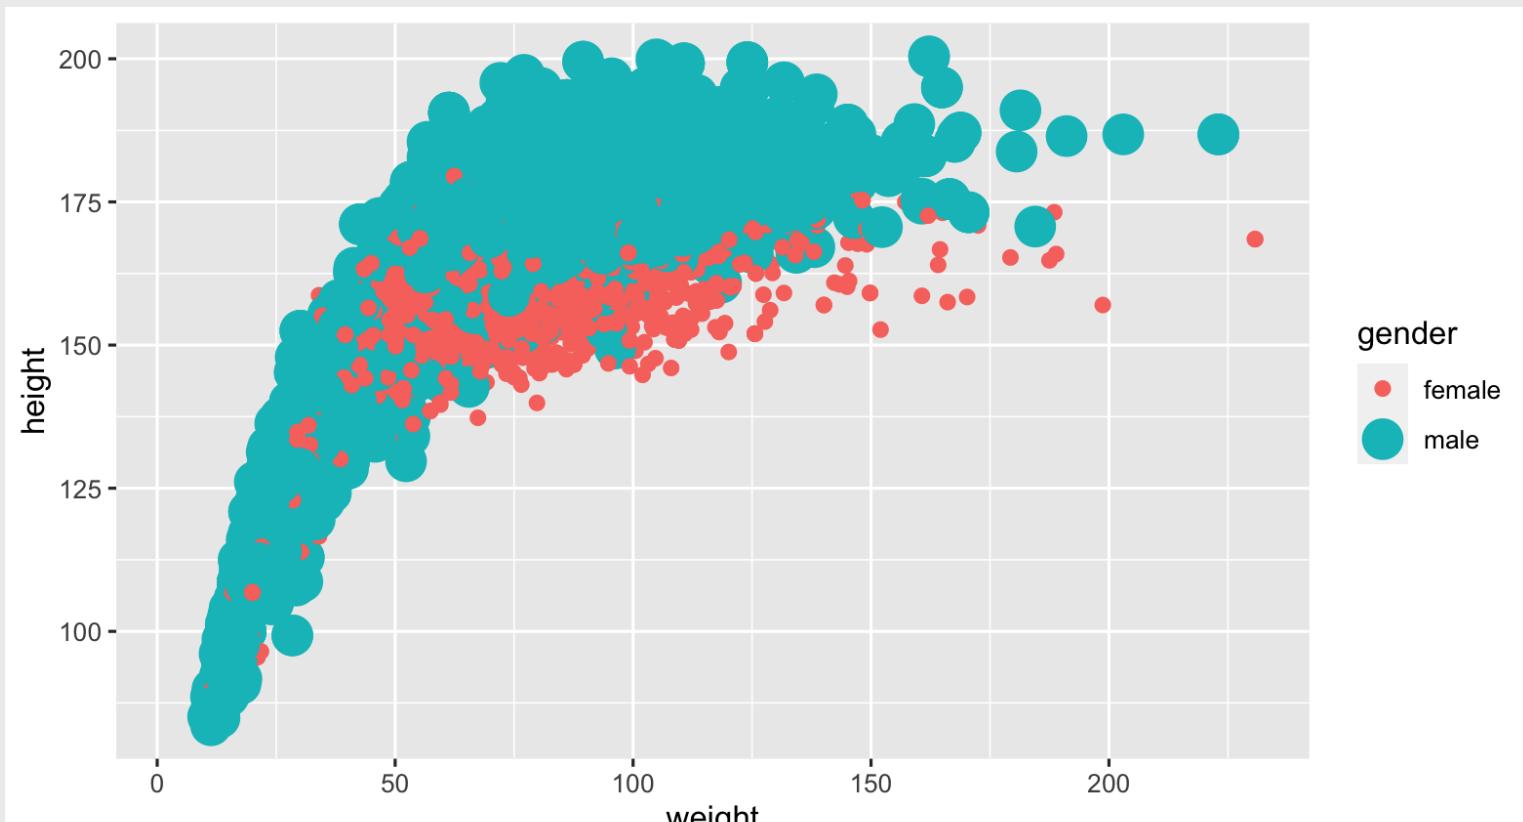

Aesthetics: shape


```
SmallNhanes %>%
```

```
  ggplot(aes(x = weight, y = height)) +  
    geom_point(aes(color = gender, size = gender, shape = gender))
```

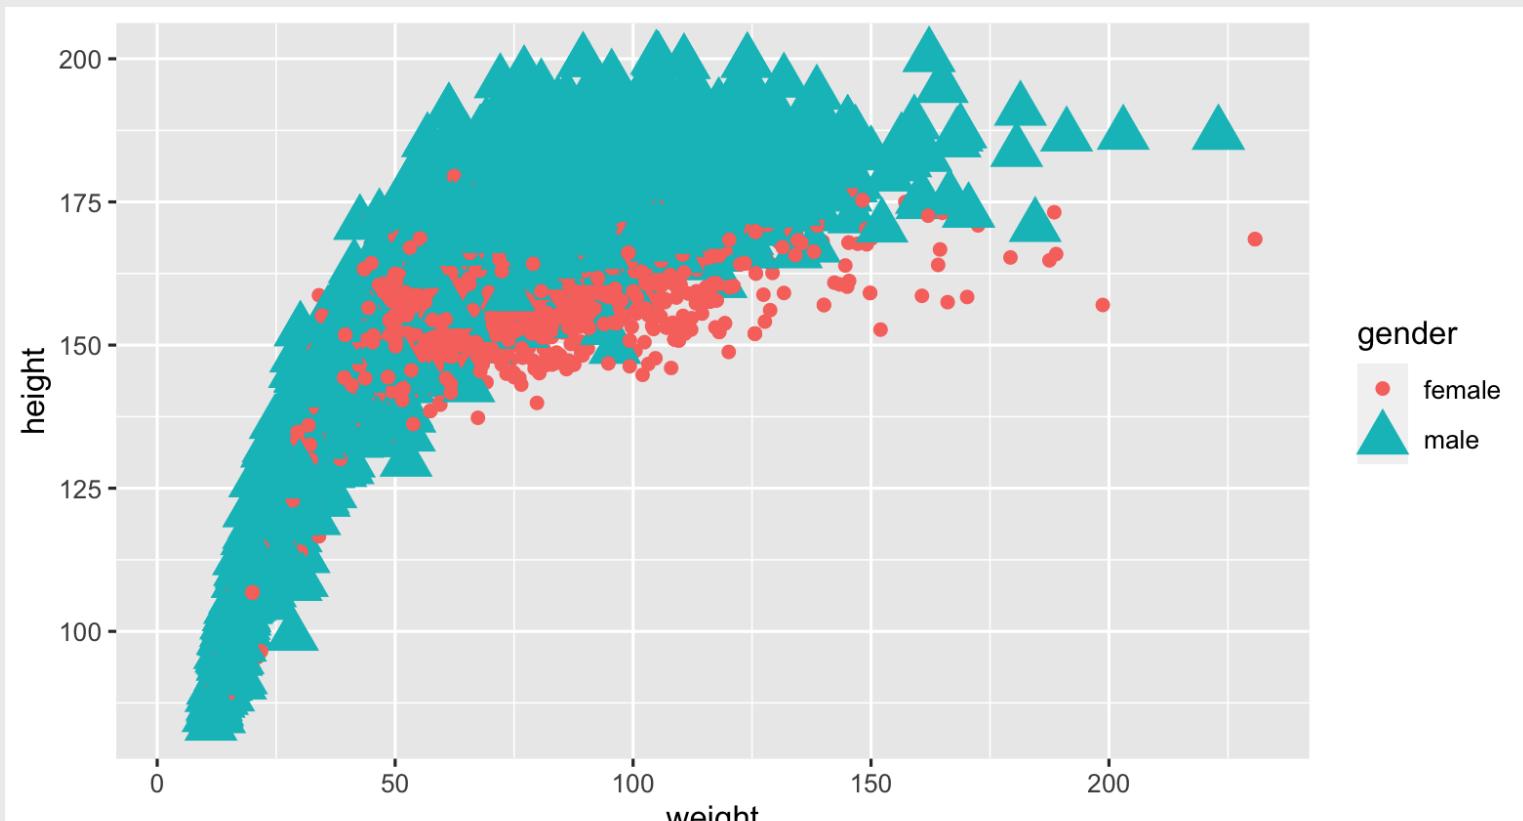

Aesthetics: alpha (opacity)


```
SmallNhanes %>%
  ggplot(aes(x = weight, y = height)) +
  geom_point(aes(color = gender, alpha = gender))
```

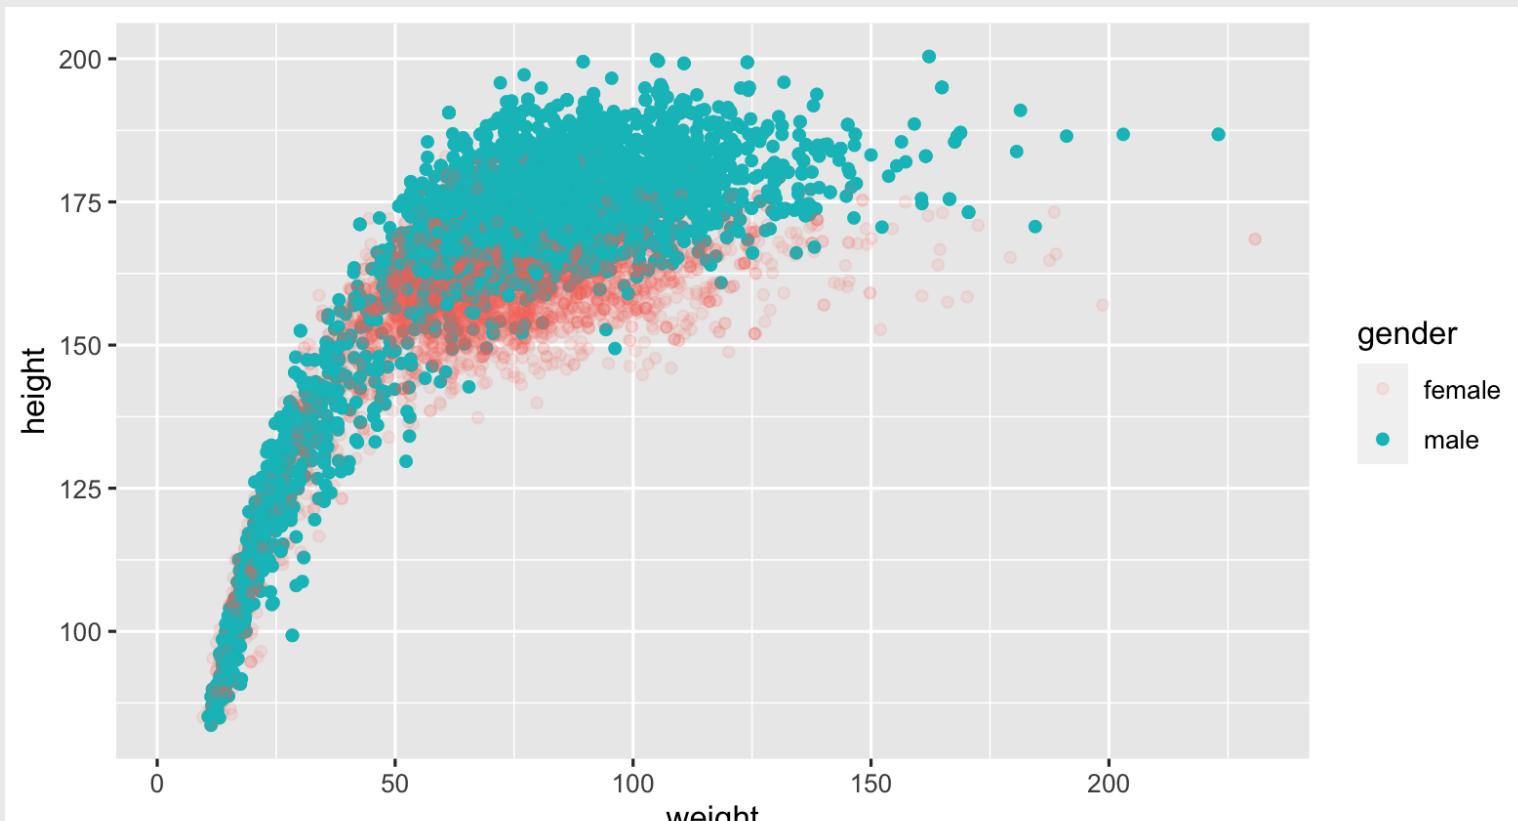

Aesthetic mappings


Legend is automatically included

Continuous variables best with `size`

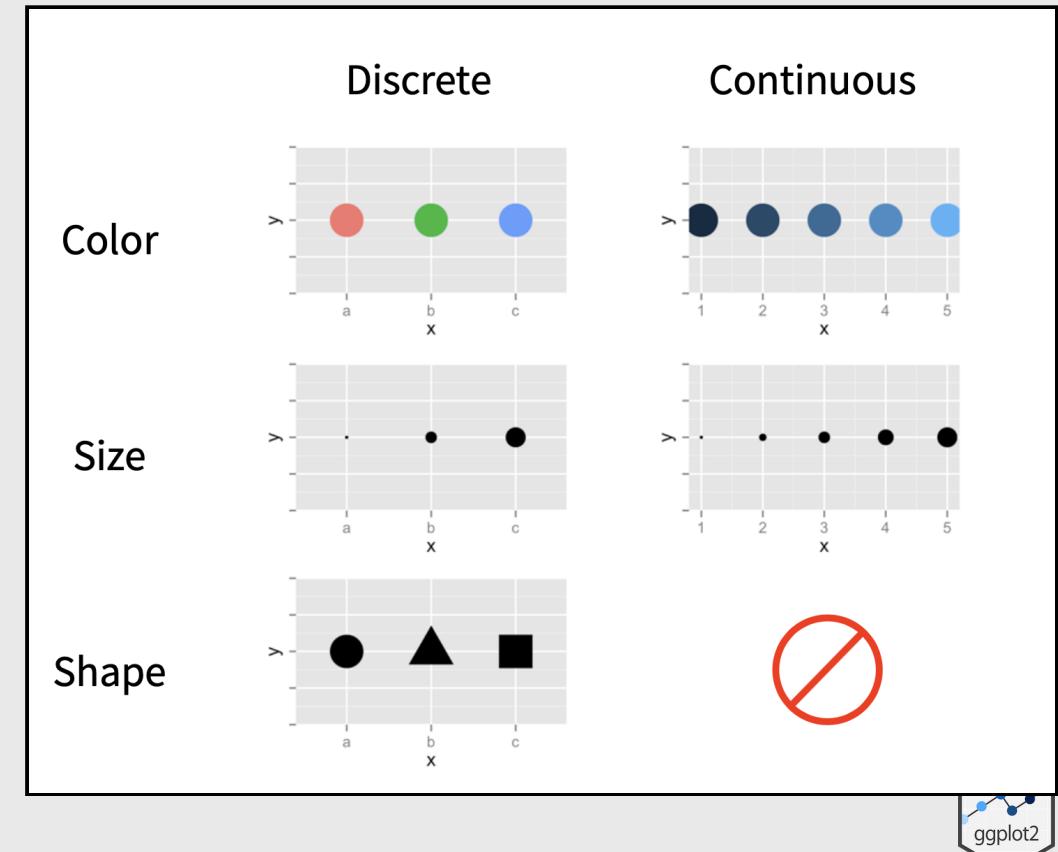


Setting values vs. mapping variables

How can we create this plot?

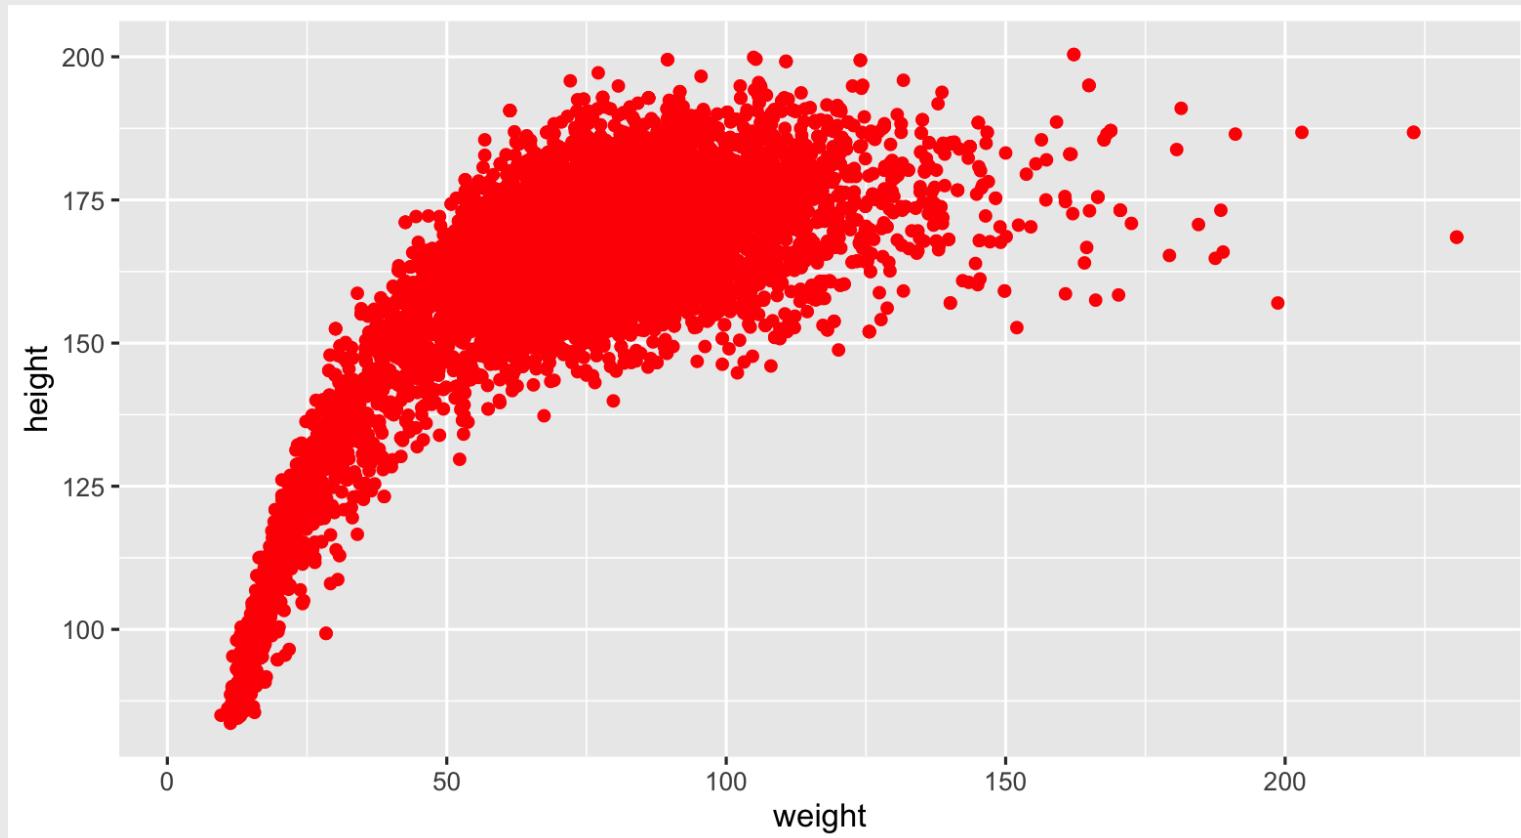


Inside aes()

```
SmallNhanes %>%
  ggplot(aes(x = weight, y = height)) +
  geom_point(aes(color = "red")) # inside aes
```

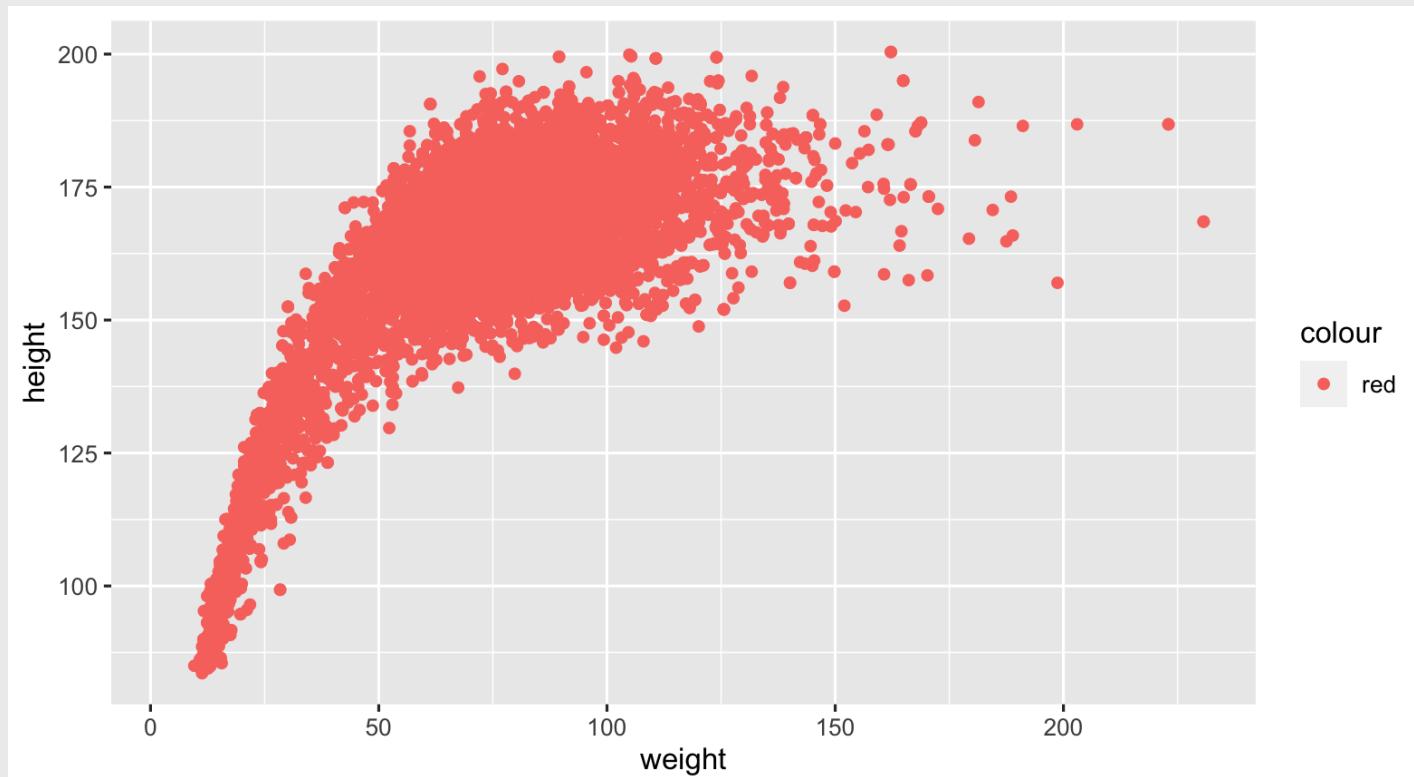

Outside aes()


```
SmallNhanes %>%
  ggplot(aes(x = weight, y = height)) +
  geom_point(color = "red") # outside aes
```

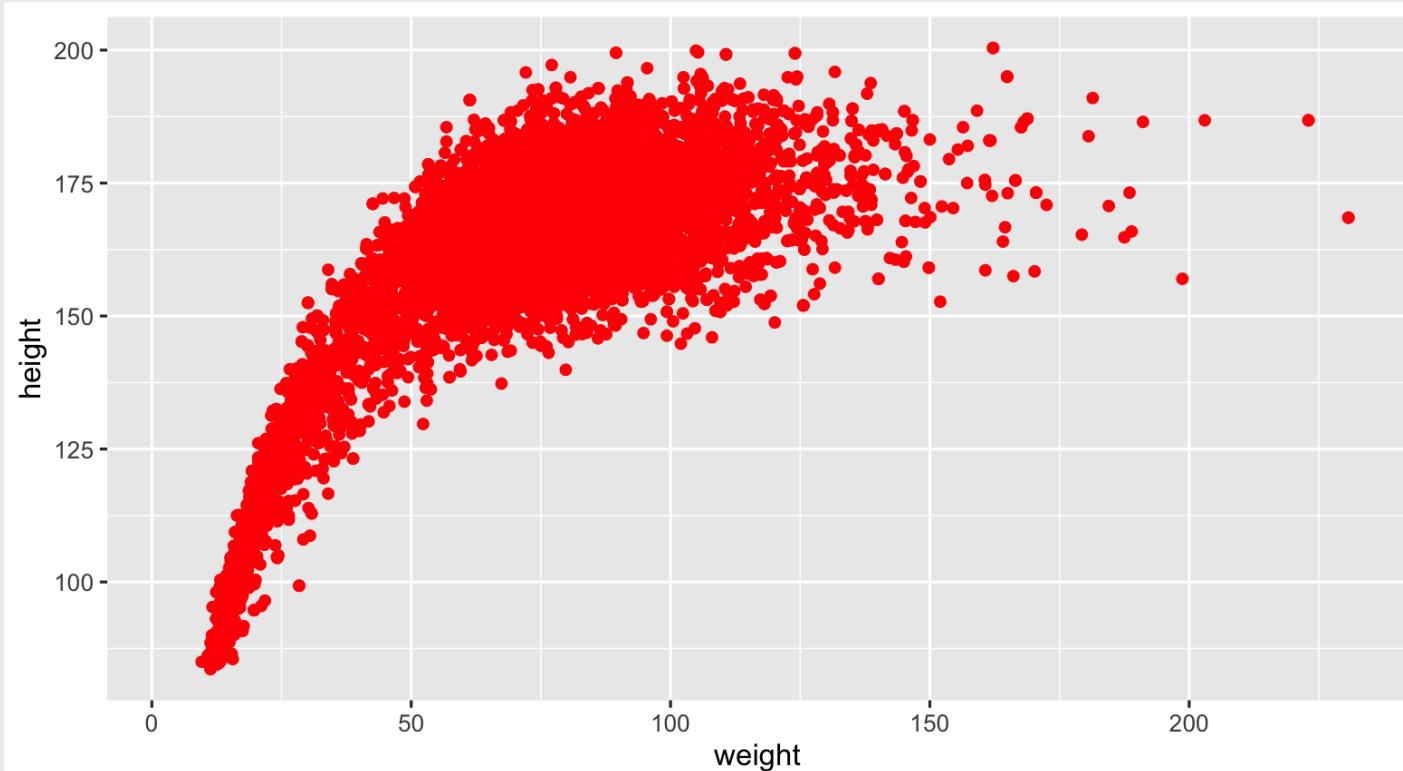

What happened?

`aes()` expected a variable, not a value ("red").

```
SmallNhanes %>%
  ggplot(aes(x = weight, y = height)) +
  geom_point(aes(color = "red")) # "value" in aes
```

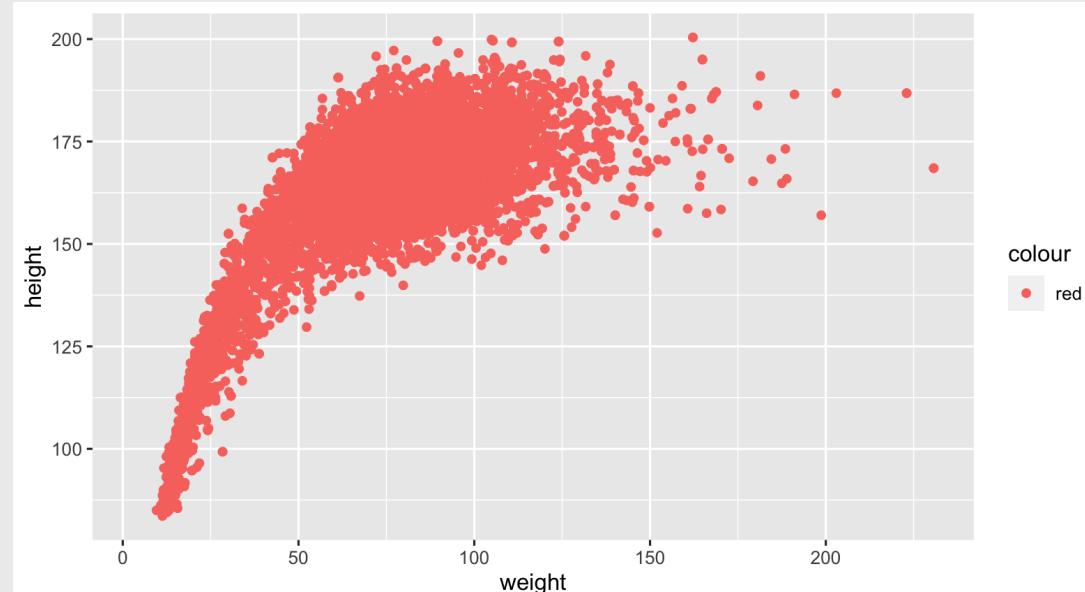

Geoms (geometric objects)



Geoms

These are visual elements used to represent the data of the graph

Examples include:

- `geom_boxplot`
- `geom_col`
- `geom_line`
- `geom_smooth`

See the cheatsheet for more examples:

<https://bit.ly/ggplot2-cheat>





Your Turn

How does BMI vary across levels of self-reported general health?


Complete the code below:

Map the variables locally inside the `geom_boxplot()` function

```
SmallNhances %>%  
  ggplot() %>%  
  geom_boxplot(mapping = aes(x = _____, y = __))
```

```
SmallNhanes %>%  
  ggplot() +  
  geom_boxplot(mapping = aes(x = health_gen, y = bmi))
```

Box-plots are great for seeing how a continuous variable varies across a categorical variable

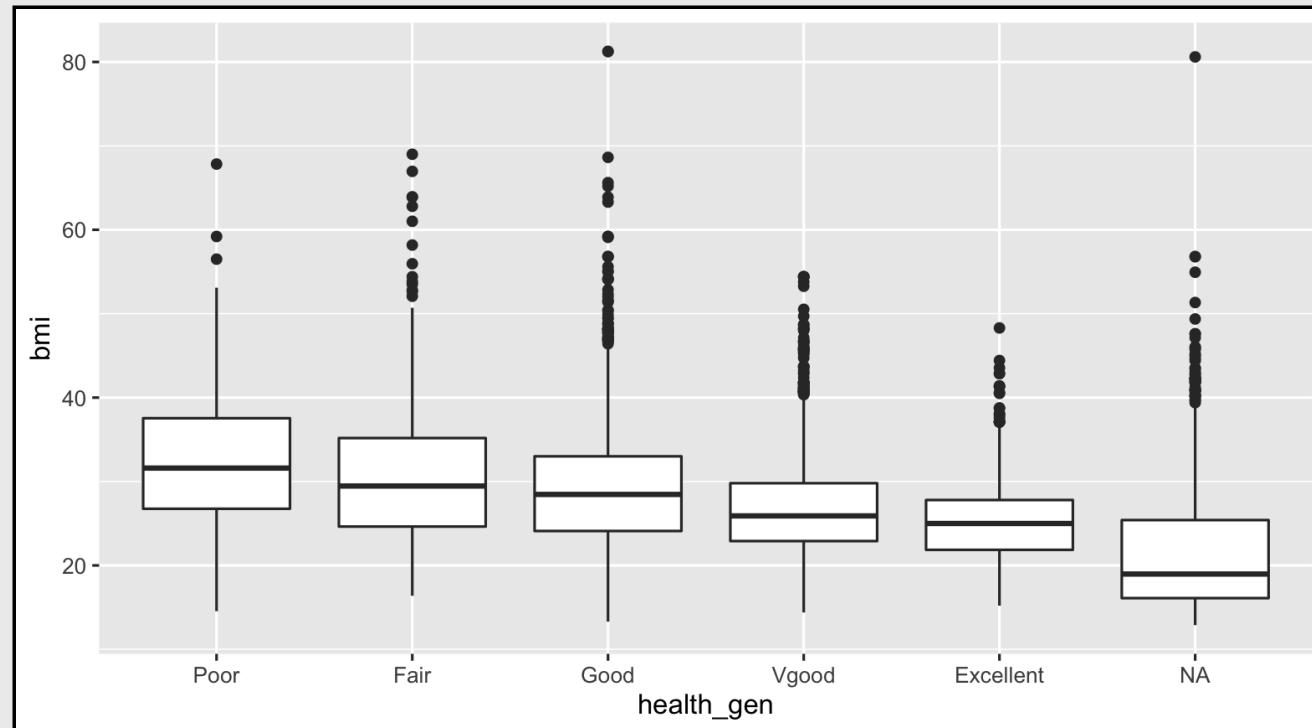




Your Turn

Fill in the code below to change the colors in the boxplot for each level of `health_gen`

```
SmallNhanes %>%
  ggplot() +
  geom_boxplot(
    aes(x = health_gen, y = bmi, _____ = health_gen))
```


```
SmallNhanes %>%
  ggplot() +
  geom_boxplot(
    aes(x = health_gen, y = bmi, color = health_gen))
```

Color is not the setting we want here...

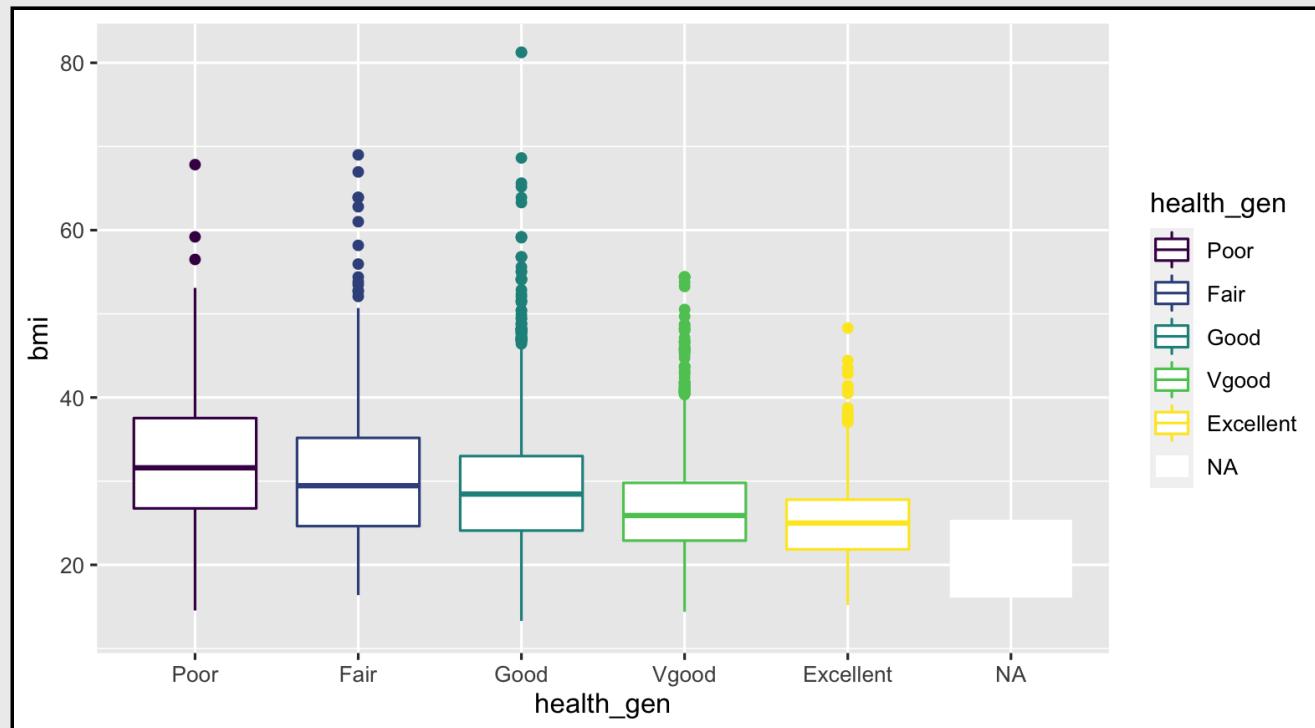

```
SmallNhanes %>%
  ggplot() +
  geom_boxplot(
    aes(x = health_gen, y = bmi, fill = health_gen))
```

Fill is better

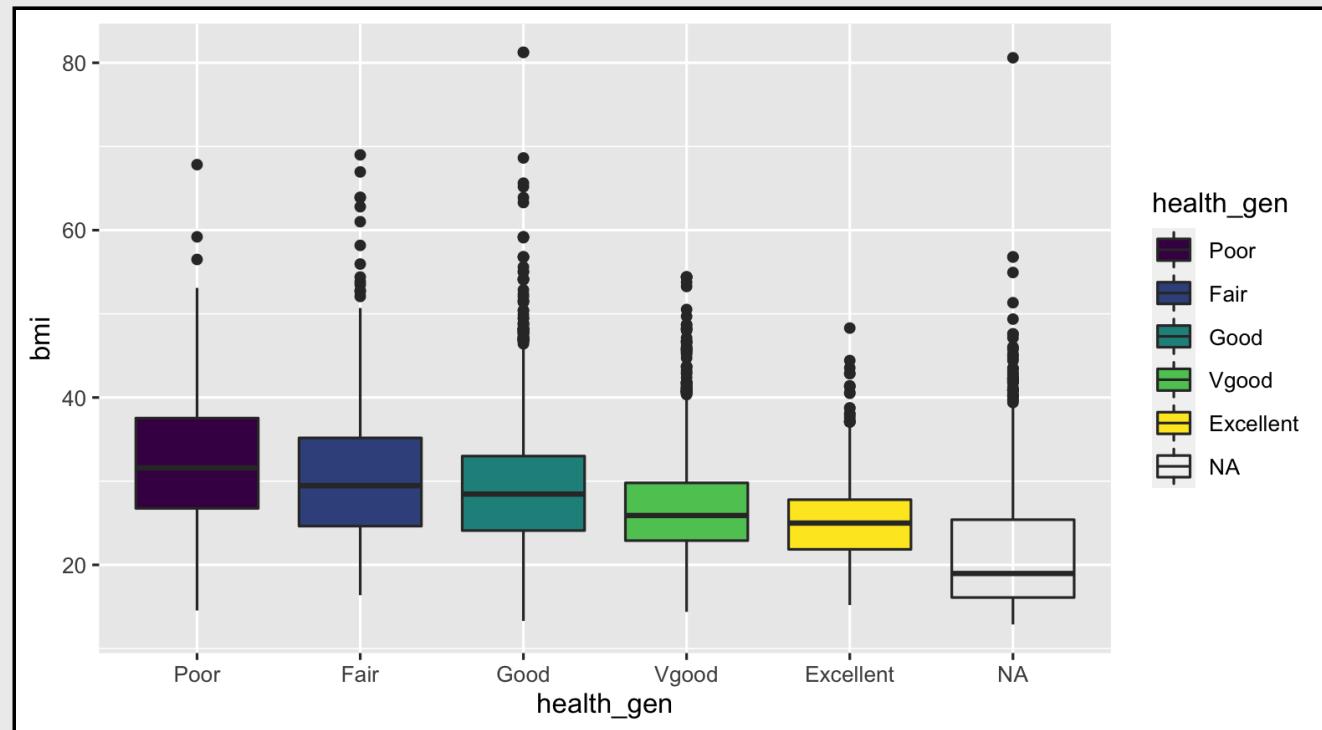




Adding layers

The 'infinitely extensible' part of `ggplot2` is where we start to really see it's power


Consider the relationship between `height` and `weight` again

SmallNhanes %>%


```
ggplot(aes(x = weight, y = height)) + # global  
  geom_point(aes(color = gender))
```

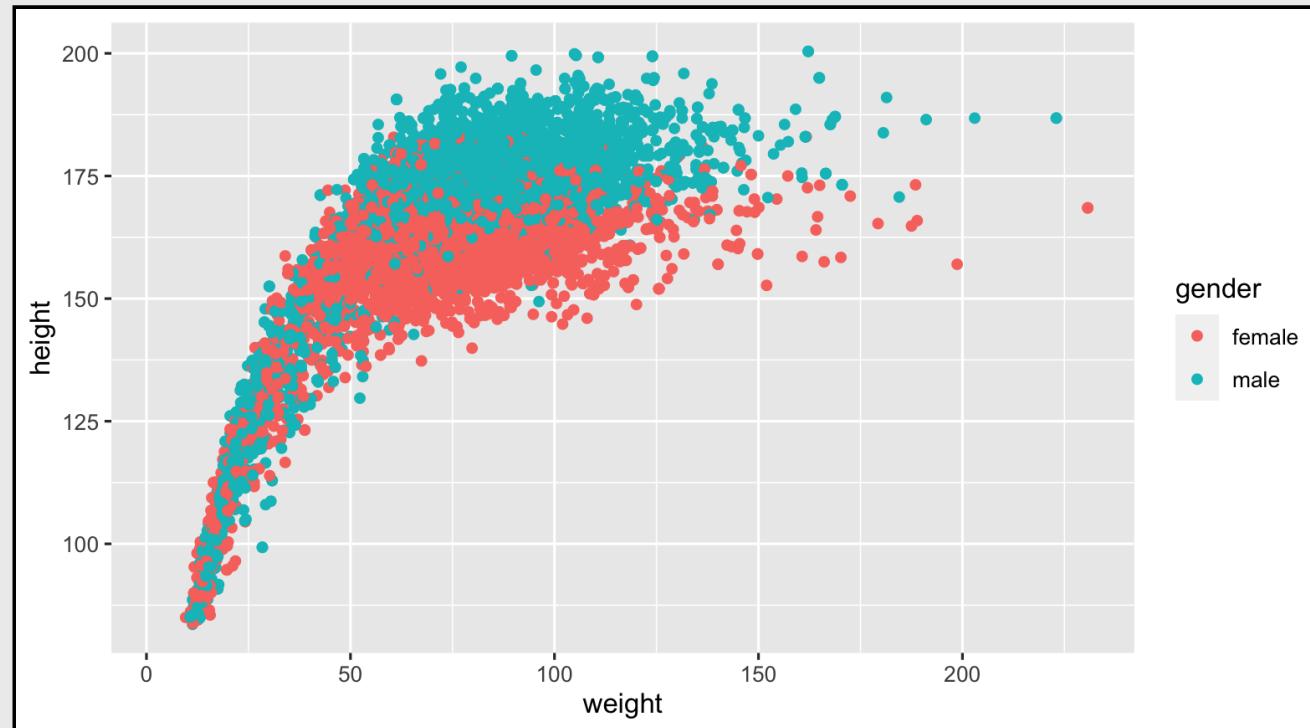

```
SmallNhanes %>%
  ggplot(aes(x = weight, y = height)) +
  geom_point(aes(color = gender)) +
  geom_smooth(data = # data 2
              filter(SmallNhanes, gender == "male"), # layer 2
              aes(x = weight, y = height),
              color = "blue")
```

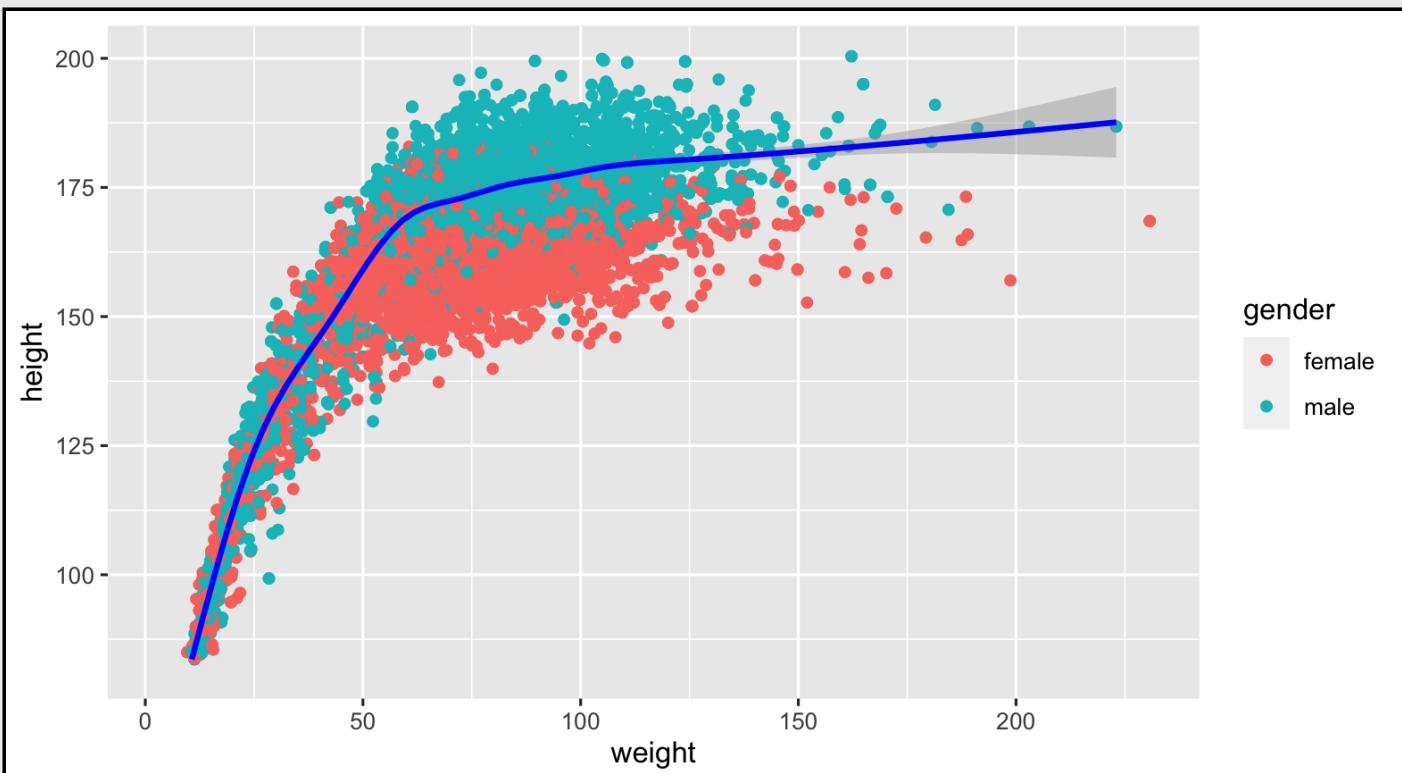

```
SmallNhanes %>%
  ggplot(aes(x = weight, y = height)) +
  geom_point(aes(color = gender)) +
  geom_smooth(data =
    filter(SmallNhanes, gender == "male"),
    aes(x = weight, y = height),
    color = "blue") +
  geom_smooth(data = # data 3
    filter(SmallNhanes, gender == "female"), # layer 3
    aes(x = weight, y = height),
    color = "red")
```

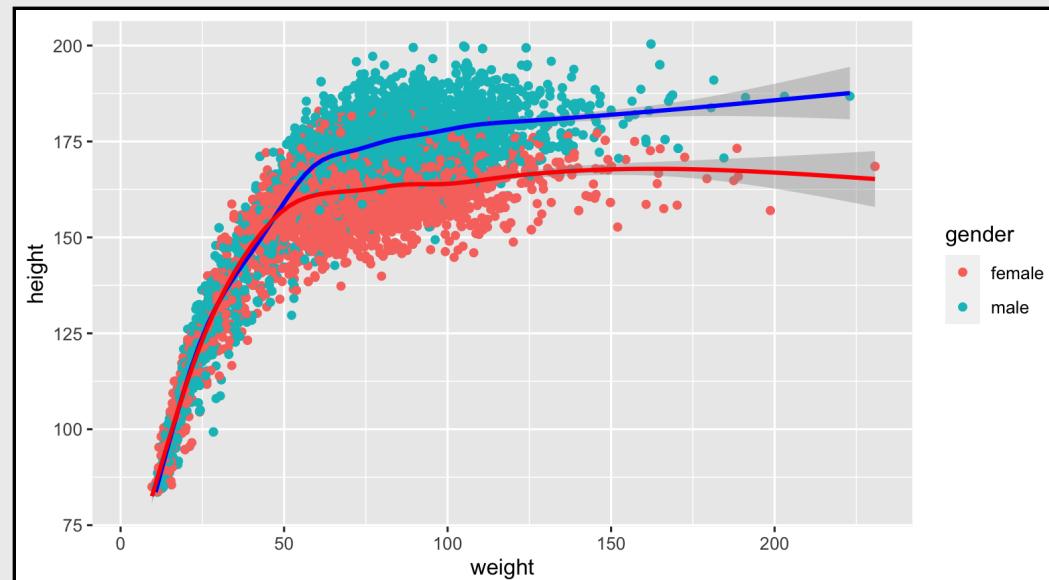

Facets



Faceting




Facet layers display subplots for levels of categorical variables

Facet layer	Display
<code>facet_wrap(. ~ gender)</code>	Plot for each level of <code>gender</code>
<code>facet_wrap(race1 ~ gender)</code>	Plot for each level of <code>gender</code> and <code>race</code>
<code>facet_wrap(. ~ gender, ncol = 1)</code>	Specify the number of columns
<code>facet_wrap(. ~ gender, nrow = 1)</code>	Specify the number of rows

Facet Single Variable




```
SmallNhanes %>%
  ggplot(aes(x = weight, y = height)) +
  geom_point(aes(color = gender)) +
  facet_wrap(. ~ gender)
```

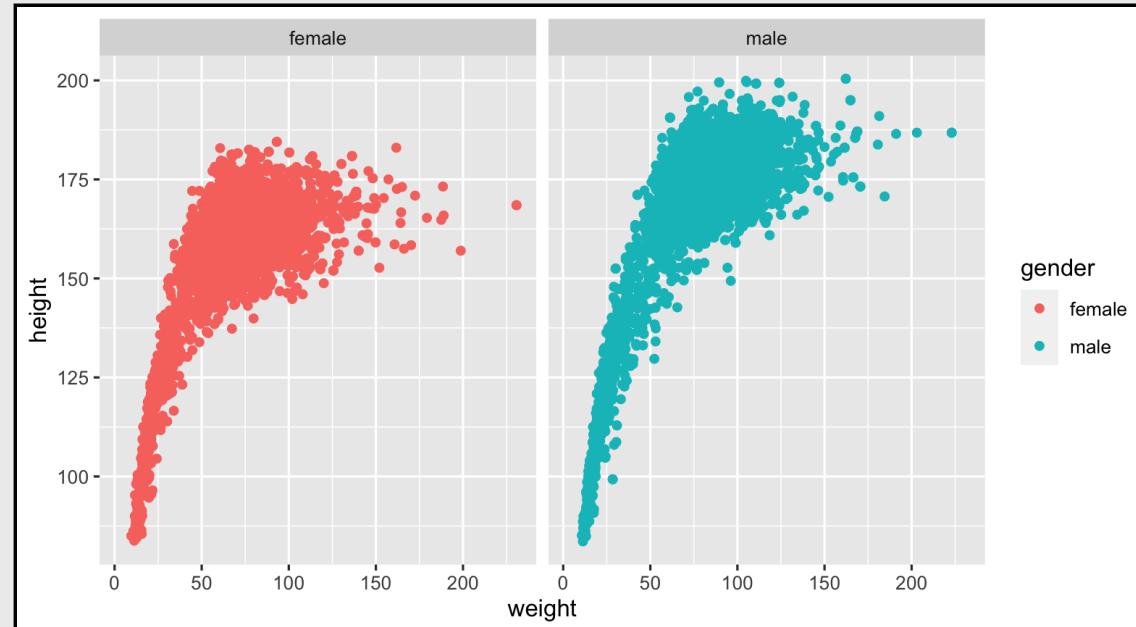



Facet Two Variables


```
SmallNhanes %>%
  ggplot(aes(x = weight, y = height)) +
  geom_point(aes(color = gender)) +
  facet_wrap(race1 ~ gender)
```

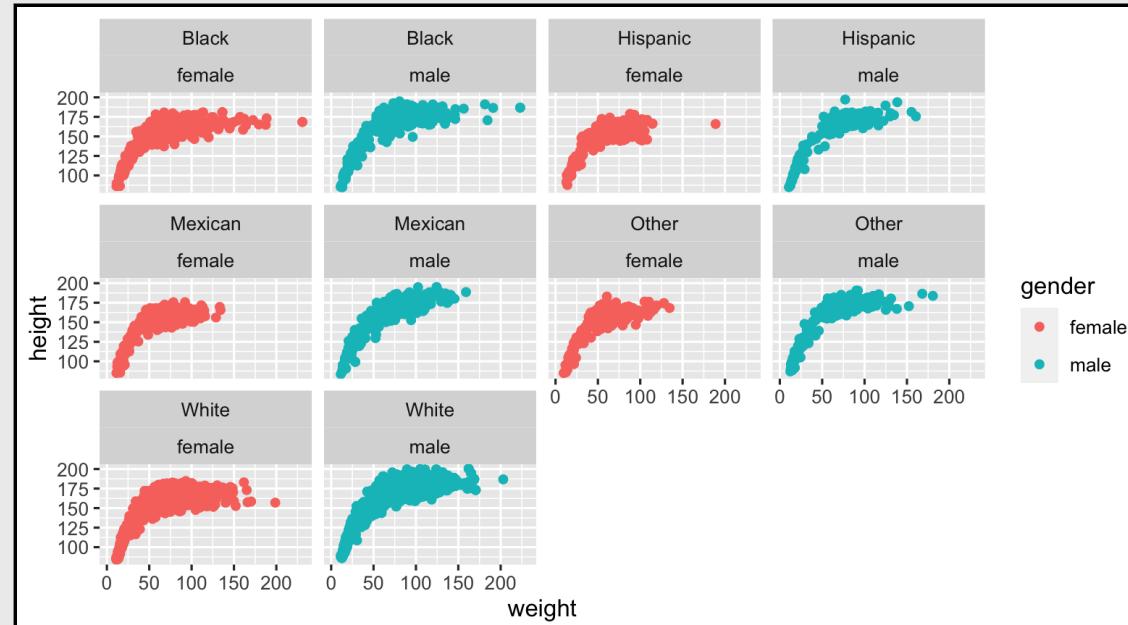



Facet: Set Columns


```
SmallNhanes %>%
  ggplot(aes(x = weight, y = height)) +
  geom_point(aes(color = gender)) +
  facet_wrap(race1 ~ gender, ncol = 5)
```

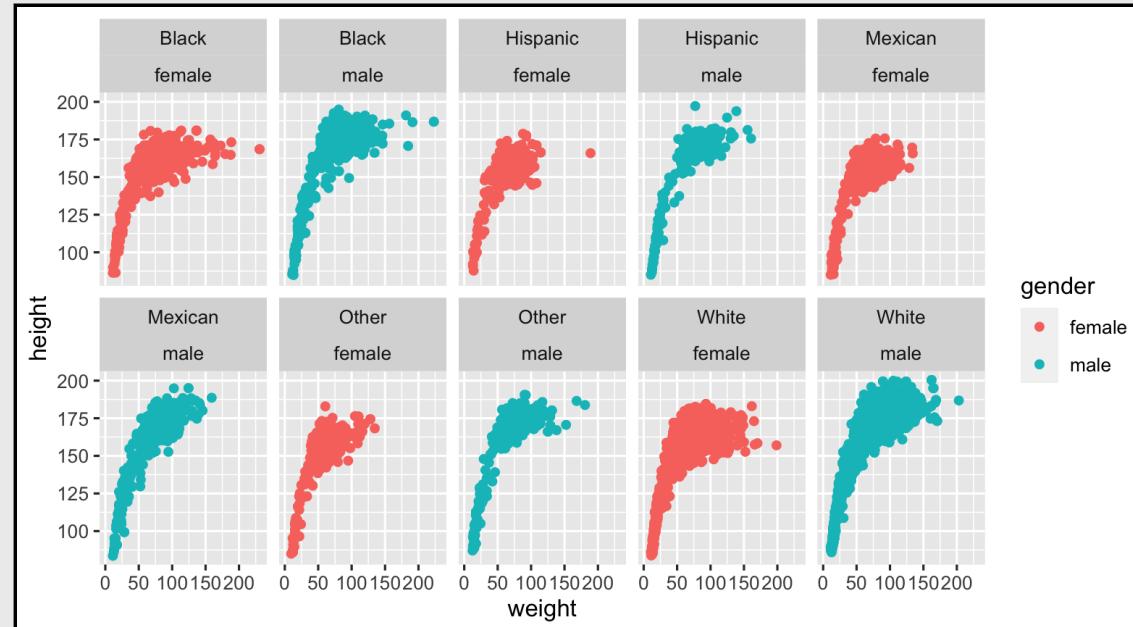



Facet: Set Rows

```
SmallNhanes %>%
  ggplot(aes(x = weight, y = height)) +
  geom_point(aes(color = gender)) +
  facet_wrap(race1 ~ gender, nrow = 2)
```

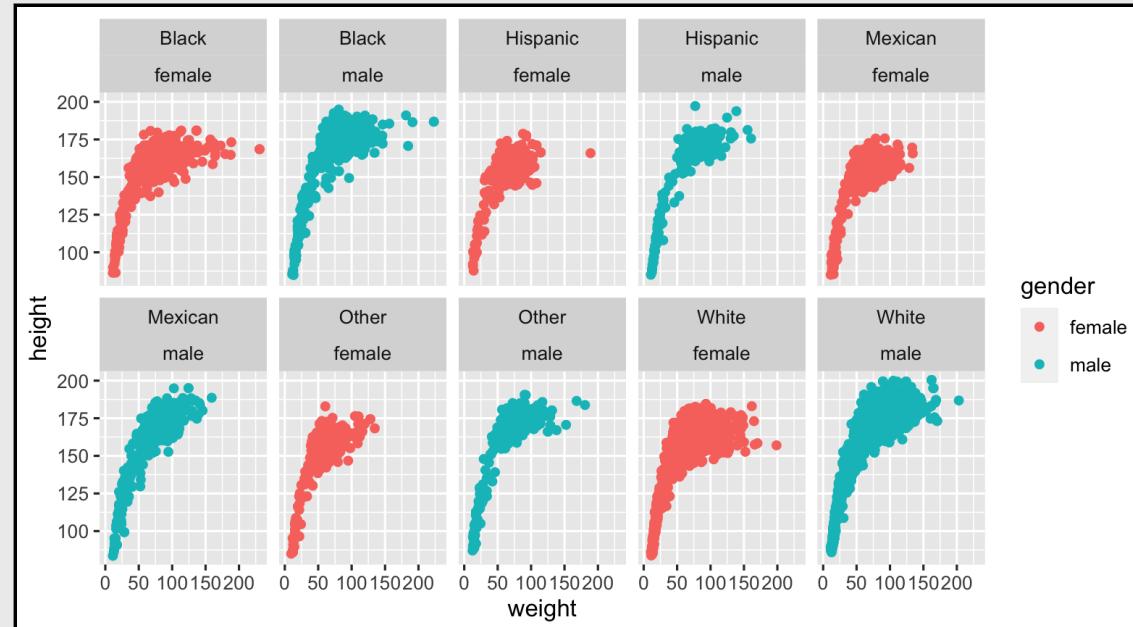



Recap

- 1) Introduction the grammar of graphics syntax**
- 2) Identifying graph aesthetics (position, color, shape, opacity, etc.)**
- 3) Recognizing and using geoms (`geom_point`, `geom_smooth`, etc.)**
- 4) Facetting graphs (`facet_wrap` with 1 or two variables)**

More resources

[The ggplot2 book](#)

[ggplot2 on the tidyverse website](#)

[Flowing Data](#)

