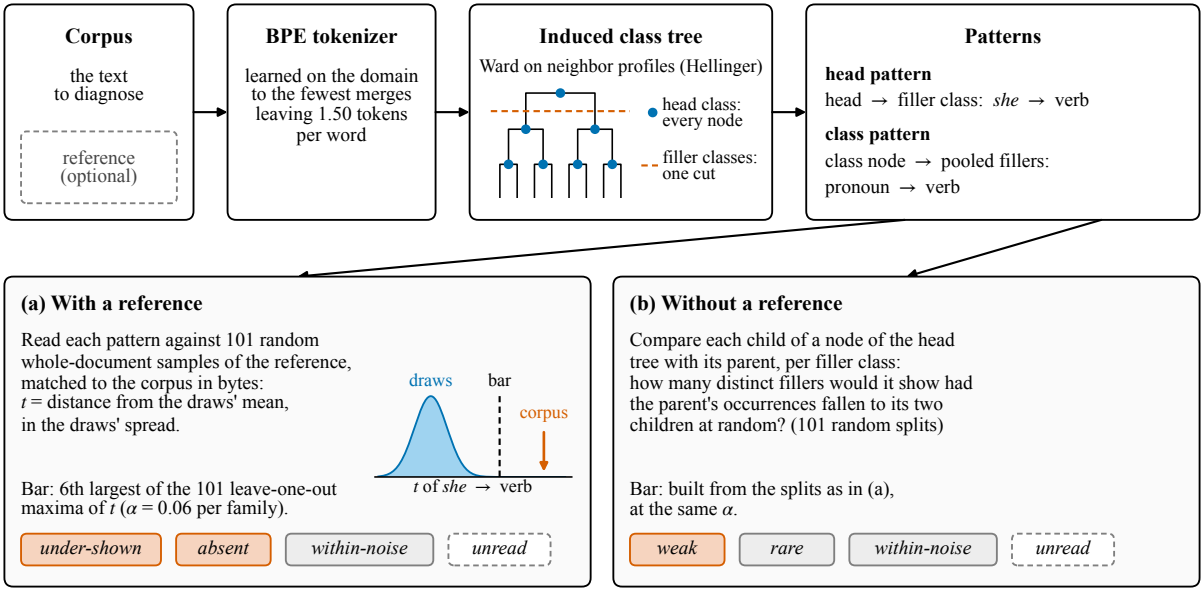

Corpus
the text to diagnose
reference (optional)
BPE tokenizer
learned on the domain to the fewest merges leaving 1.50 tokens per word
Induced class tree
Ward on neighbor profiles (Hellinger)
head class: every node
filler classes: one cut
Patterns
head pattern
head → filler class: she → verb
class pattern
class node → pooled fillers:
pronoun → verb
(a) With a reference
Read each pattern against 101 random whole-document samples of the reference, matched to the corpus in bytes:
t = distance from the draws' mean, in the draws' spread.
draws
bar
corpus
t of she → verb
Bar: 6th largest of the 101 leave-one-out maxima of t (α = 0.06 per family).
under-shown
absent
within-noise
unread
(b) Without a reference
Compare each child of a node of the head tree with its parent, per filler class:
how many distinct fillers would it show had the parent's occurrences fallen to its two children at random? (101 random splits)
Bar: built from the splits as in (a), at the same α.
weak
rare
within-noise
unread