

References: Chapter 17 of Geron's book. For 1-Dim plots, Keras tutorial :

<https://www.tensorflow.org/tutorials/generative/autoencoder>

This file trains a modified VAE (with a different sampling layer and a different loss function) with the instances of the normal digits in the training data.

Then, it measures the reconstruction loss for the digits in the test data.

The reconstruction loss for the instances of the abnormal digits in the test data is higher.

A threshold is determined based on the distribution of the reconstruction losses of the normal training data (threshold = mean + 2.5*std of this distribution).

Then, if the reconstruction loss of a digit in the test data is higher than this threshold, it is classified as abnormal.

By comparing with the known labels of test data (with T for normal digit(s) and F for abnormal digit(s)), the confusion matrix and the accuracy is calculated.

```
import sklearn
import tensorflow as tf
from tensorflow import keras
import numpy as np

import matplotlib as mpl
import matplotlib.pyplot as plt
mpl.rc('axes', labelsize=14)
mpl.rc('xtick', labelsize=12)
mpl.rc('ytick', labelsize=12)

from sklearn.metrics import accuracy_score, precision_score, recall_score, confusion_matrix
from sklearn.model_selection import train_test_split
```

Loading the MNIST data and forming arrays of the normal training data, the validation data (normal and abnormal) and the test data (normal and abnormal)

```
#Labels
# 0 T-shirt/top
# 1 Trouser
# 2 Pullover
# 3 Dress
# 4 Coat
# 5 Sandal
```

```

# 6 Shirt
# 7 Sneaker
# 8 Bag
# 9 Ankle boot

nl1 = 5
nl2 = 7
nl3 = 9
abn1 = 4
abn2 = 4

(x_train_0, y_train_0), (x_test, y_test) = keras.datasets.fashion_mnist.load_data()

x_train_0 = x_train_0.astype(np.float32) / 255
x_test = x_test.astype(np.float32) / 255

train_size = x_train_0.shape[0] * 9 // 10

x_train, x_valid, y_train, y_valid = train_test_split(x_train_0, y_train_0, train_size = tra

normal_data = x_train[(y_train == nl1) | (y_train == nl2) | (y_train == nl3)]           # Normal
normal_labels = y_train[(y_train == nl1) | (y_train == nl2) | (y_train == nl3)]

valid_data = x_valid[(y_valid == abn1) | (y_valid == abn2) | (y_valid == nl1) | (y_valid == n
valid_labels = y_valid[(y_valid == abn1) | (y_valid == abn2) | (y_valid == nl1) | (y_valid == n

test_data = x_test[(y_test == abn1) | (y_test == abn2) | (y_test == nl1) | (y_test == nl2) |
test_labels = y_test[(y_test == abn1) | (y_test == abn2) | (y_test == nl1) | (y_test == nl2)

test_labels_T_F = np.where((test_labels == nl1) | (test_labels == nl2) | (test_labels == nl3)
# Array of T and F, T where test digits are normal and F where test digits are abnormal

valid_labels_T_F = np.where((valid_labels == nl1) | (valid_labels == nl2) | (valid_labels == n
# Array of T and F, T where test digits are normal and F where test digits are abnormal

    Downloading data from https://storage.googleapis.com/tensorflow/tf-keras-datasets/train-32768/29515 [=====] - 0s 0us/step
    40960/29515 [=====] - 0s 0us/step
    Downloading data from https://storage.googleapis.com/tensorflow/tf-keras-datasets/train-26427392/26421880 [=====] - 0s 0us/step
    26435584/26421880 [=====] - 0s 0us/step
    Downloading data from https://storage.googleapis.com/tensorflow/tf-keras-datasets/t10k-16384/5148 [=====]
    Downloading data from https://storage.googleapis.com/tensorflow/tf-keras-datasets/t10k-4423680/4422102 [=====] - 0s 0us/step
    4431872/4422102 [=====] - 0s 0us/step

```

normal_data.shape, normal_labels.shape, valid_data.shape, valid_labels.shape, test_data.shape

((16284, 28, 28), (16284,), (2306, 28, 28), (2306,), (4000, 28, 28), (4000,))

```

normal_test_data = test_data[(test_labels == n11) | (test_labels == n12) | (test_labels == n1)]
abnormal_test_data = test_data[(test_labels == abn1) | (test_labels == abn2)] # The ab
normal_test_labels = test_labels[(test_labels == n11) | (test_labels == n12) | (test_labels == n1)]
abnormal_test_labels = test_labels[(test_labels == abn1) | (test_labels == abn2)] # Their

normal_test_data.shape, abnormal_test_data.shape

((3000, 28, 28), (1000, 28, 28))

normal_valid_data = valid_data[(valid_labels == n11) | (valid_labels == n12) | (valid_labels == n1)]
abnormal_valid_data = valid_data[(valid_labels == abn1) | (valid_labels == abn2)] # Th
normal_valid_labels = valid_labels[(valid_labels == n11) | (valid_labels == n12) | (valid_labels == n1)]
abnormal_valid_labels = valid_labels[(valid_labels == abn1) | (valid_labels == abn2)] # Th

normal_valid_data.shape, abnormal_valid_data.shape

((1716, 28, 28), (590, 28, 28))

```

▼ Building and training the network

```

K = keras.backend
# def rounded_accuracy(y_true, y_pred):
#   return keras.metrics.binary_accuracy(tf.round(y_true), tf.round(y_pred))

# Modified sampling layer with the addition of mean_2, log_var_2, and fraction p, with
# the appropriate change in the reparametrization trick to do stochastic
# sampling from the superposition of the two MVN distributions, while allowing
# the 5 parallel layers containing the means and stds of the two MVNs and the fractions p's
# for each dimension to be trained via backpropogation of the error signal.
class Sampling(keras.layers.Layer):
    def call(self, inputs):
        mean_1, log_var_1, mean_2, log_var_2, p = inputs
        return (K.random_normal(tf.shape(log_var_1)) * K.exp(log_var_1 / 2) + mean_1)*p + (K.

# For details please see Geron's book.
codings_size = 16 # The number of dimensions of the two MVN distributions in the sampling la

inputs = keras.layers.Input(shape=[28, 28])
z = keras.layers.Flatten()(inputs)
z = keras.layers.Dense(256, activation="selu")(z)
z = keras.layers.Dense(128, activation="selu")(z)
z = keras.layers.Dense(64, activation="selu")(z)

# Adding output nodes (parallel layers) at the end of the encoder for means
# and standard deviations of a second Multivariate Normal (MVN) distribution

```

```

# in the dimensions of the coding size (here 32). In each of the dimensions,
# this first MVN is multiplied by a fraction p and added to the second MVN
# multiplied by 1 - p in each dimension.
# final distribution = p * first MVN + (1 - p) * second MVN
# Another parallel layer (set of nodes) is added to keep and train the fractions p's
# in each dimension
codings_mean_1 = keras.layers.Dense(codings_size)(z)
codings_log_var_1 = keras.layers.Dense(codings_size)(z)
codings_mean_2 = keras.layers.Dense(codings_size)(z)
codings_log_var_2 = keras.layers.Dense(codings_size)(z)
codings_p = keras.layers.Dense(1, activation='sigmoid')(z)

# Modified sampling layer at the end of the encoder
codings = Sampling()([codings_mean_1, codings_log_var_1, codings_mean_2, codings_log_var_2, c
variational_encoder = keras.models.Model(
    inputs=[inputs], outputs=[codings_mean_1, codings_log_var_1, codings_mean_2, codings_log_]

decoder_inputs = keras.layers.Input(shape=[codings_size])
x = keras.layers.Dense(64, activation="selu")(decoder_inputs)
x = keras.layers.Dense(128, activation="selu")(x)
x = keras.layers.Dense(256, activation="selu")(x)
x = keras.layers.Dense(28 * 28, activation="sigmoid")(x)
outputs = keras.layers.Reshape([28, 28])(x)
variational_decoder = keras.models.Model(inputs=[decoder_inputs], outputs=[outputs])

_, _, _, _, codings = variational_encoder(inputs)
reconstructions = variational_decoder(codings)
variational_ae = keras.models.Model(inputs=[inputs], outputs=[reconstructions])

# New latent loss function that will be added to the reconstruction binary cross-entropy loss
# The whole network (Encoder, sampling layer, and decoder) will train to minimize this loss
p_mean = K.mean(codings_p)
array1 = p_mean*(codings_log_var_1 - K.exp(codings_log_var_1) - K.square(codings_mean_1))
array2 = (1-p_mean)*(codings_log_var_2 - K.exp(codings_log_var_2) - K.square(codings_mean_2))
sum1 = K.sum(1 + array1, axis=-1)
sum2 = K.sum(1 + array2, axis=-1)

# latent_loss = -0.5 * tf.math.maximum(sum1, sum2)

latent_loss = -0.5 * (sum1 + sum2)

latent_loss = latent_loss * 0.5

# Add the latent loss to the reconstruction loss
variational_ae.add_loss(K.mean(latent_loss) / 784.)

# For the reconstruction loss binary cross-entropy loss is used (same as regular VAE).
# For details please see Chapter 17 of Geron's book (Stacked AE and VAE sections)
variational_ae.compile(loss="binary_crossentropy", optimizer="rmsprop")

checkpoint cb = keras.callbacks.ModelCheckpoint("modVAE latent times half model", monitor="va
https://colab.research.google.com/drive/1VksTwMaZTm4KmbI4W3TVgJdZK5qMjBeE#scrollTo=LHtnRipgphNx&printMode=true

```


```
history = variational_ae.fit(normal_data, normal_data, epochs=100, batch_size=128, callbacks=validation_data=(normal_valid_data, normal_valid_data), shuffle=True)

128/128 [=====] - 1s 8ms/step - loss: 0.2193 - val_loss: 0.2
Epoch 75/100
128/128 [=====] - 1s 8ms/step - loss: 0.2191 - val_loss: 0.2
Epoch 76/100
124/128 [=====>.] - ETA: 0s - loss: 0.2190INFO:tensorflow:Asse...
128/128 [=====] - 4s 35ms/step - loss: 0.2191 - val_loss: 0.2
Epoch 77/100
122/128 [=====>..] - ETA: 0s - loss: 0.2192INFO:tensorflow:Asse...
128/128 [=====] - 3s 27ms/step - loss: 0.2191 - val_loss: 0.2
Epoch 78/100
128/128 [=====] - 1s 8ms/step - loss: 0.2190 - val_loss: 0.2
Epoch 79/100
128/128 [=====] - 1s 8ms/step - loss: 0.2189 - val_loss: 0.2
Epoch 80/100
122/128 [=====>..] - ETA: 0s - loss: 0.2189INFO:tensorflow:Asse...
128/128 [=====] - 4s 30ms/step - loss: 0.2189 - val_loss: 0.2
Epoch 81/100
128/128 [=====] - 1s 8ms/step - loss: 0.2188 - val_loss: 0.2
Epoch 82/100
128/128 [=====] - 1s 8ms/step - loss: 0.2187 - val_loss: 0.2
Epoch 83/100
128/128 [=====] - 1s 8ms/step - loss: 0.2187 - val_loss: 0.2
Epoch 84/100
128/128 [=====] - 1s 8ms/step - loss: 0.2187 - val_loss: 0.2
Epoch 85/100
128/128 [=====] - 1s 9ms/step - loss: 0.2185 - val_loss: 0.2
Epoch 86/100
128/128 [=====] - 1s 8ms/step - loss: 0.2185 - val_loss: 0.2
Epoch 87/100
128/128 [=====] - 1s 8ms/step - loss: 0.2184 - val_loss: 0.2
Epoch 88/100
124/128 [=====>.] - ETA: 0s - loss: 0.2184INFO:tensorflow:Asse...
128/128 [=====] - 3s 27ms/step - loss: 0.2184 - val_loss: 0.2
Epoch 89/100
126/128 [=====>..] - ETA: 0s - loss: 0.2182INFO:tensorflow:Asse...
128/128 [=====] - 4s 31ms/step - loss: 0.2183 - val_loss: 0.2
Epoch 90/100
128/128 [=====] - 1s 8ms/step - loss: 0.2183 - val_loss: 0.2
Epoch 91/100
128/128 [=====] - 1s 10ms/step - loss: 0.2181 - val_loss: 0.2
Epoch 92/100
128/128 [=====] - 1s 8ms/step - loss: 0.2181 - val_loss: 0.2
Epoch 93/100
128/128 [=====] - 1s 9ms/step - loss: 0.2181 - val_loss: 0.2
Epoch 94/100
128/128 [=====] - 1s 8ms/step - loss: 0.2181 - val_loss: 0.2
Epoch 95/100
128/128 [=====] - 1s 8ms/step - loss: 0.2180 - val_loss: 0.2
Epoch 96/100
128/128 [=====] - 1s 8ms/step - loss: 0.2180 - val_loss: 0.2
Epoch 97/100
123/128 [=====>..] - ETA: 0s - loss: 0.2179INFO:tensorflow:Asse...
```

```
128/128 [=====] - 4s 31ms/step - loss: 0.2179 - val_loss: 0.
Epoch 98/100
128/128 [=====] - 1s 9ms/step - loss: 0.2178 - val_loss: 0.2
Epoch 99/100
128/128 [=====] - 1s 8ms/step - loss: 0.2178 - val_loss: 0.2
  100/100
```

```
plt.plot(history.history["loss"], label="Training Loss")
plt.plot(history.history["val_loss"], label="Validation Loss")
plt.legend()
```

```
<matplotlib.legend.Legend at 0x7ff6ac4e2090>
```

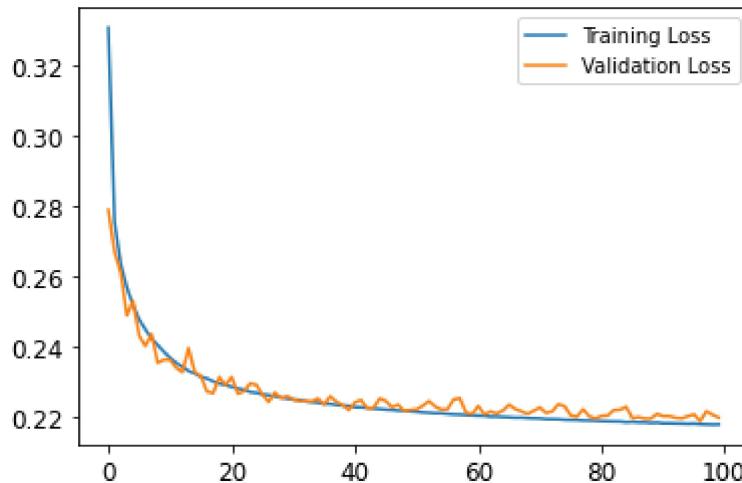

```
model = variational_ae
model.summary(expand_nested=True, show_trainable=True)
```

```
'tf.math.exp[0][0]' ▲

tf.math.square (TFOpLambda)    (None, 16)      0      ['dense_3[0][0]']

tf.math.subtract_3 (TFOpLambda (None, 16)      0      ['dense_6[0][0]',

)
'tf.math.exp_1[0][0]

tf.math.square_1 (TFOpLambda)   (None, 16)      0      ['dense_5[0][0]']

tf.math.subtract_1 (TFOpLambda (None, 16)      0      ['tf.math.subtract[0
'tf.math.square[0][0

tf.math.subtract_2 (TFOpLambda ()       0      ['tf.math.reduce_mean[0

tf.math.subtract_4 (TFOpLambda (None, 16)      0      ['tf.math.subtract_3
'tf.math.square_1[0

tf.math.multiply (TFOpLambda)   (None, 16)      0      ['tf.math.reduce_mean[0
'tf.math.subtract_1[0

tf.math.multiply_1 (TFOpLambda (None, 16)      0      ['tf.math.subtract_2
'tf.math.subtract_4[0
```

```

tf.__operators__.add (TFOpLamb (None, 16)          0      ['tf.math.multiply[0
da)

tf.__operators__.add_1 (TFOpLa (None, 16)          0      ['tf.math.multiply_1
mbda)

tf.math.reduce_sum (TFOpLambda (None,)           0      ['tf.__operators__.a
)

tf.math.reduce_sum_1 (TFOpLamb (None,)           0      ['tf.__operators__.a
da)

tf.__operators__.add_2 (TFOpLa (None,)           0      ['tf.math.reduce_sum
mbda)

tf.math.multiply_2 (TFOpLambda (None,)           0      ['tf.__operators__.a
)

tf.math.multiply_3 (TFOpLambda (None,)           0      ['tf.math.multiply_2
)

tf.math.reduce_mean_1 (TFOpLam ()                 0      ['tf.math.multiply_3
bda)

tf.math.truediv (TFOpLambda) ()                  0      ['tf.math.reduce_me
add_loss (AddLoss) ()                           0      ['tf.math.truediv[0]

=====
Total params: 490,257
Trainable params: 490,257
Non-trainable params: 0

```

```

model_encoder = variational_encoder
# model_encoder.summary(expand_nested=True, show_trainable=True)

model_decoder = variational_decoder
# model_decoder.summary(expand_nested=True, show_trainable=True)

model_layers = np.array(model.layers)
n_layers = model_layers.shape[0]
# np.concatenate((np.arange(n_layers).reshape(n_layers,1), model_layers.reshape(n_layers,1)),

```

The original and reconstructed images for the first 30 instances of the normal training data, validation data, normal validation data, abnormal validation data, test data, normal test data, and abnormal test data

```
def plot_image(image):
    plt.imshow(image, cmap="binary")
    plt.axis("off")

def show_reconstructions(model, images=test_data, n_images=5):
    reconstructions = model.predict(images[:n_images])
    fig = plt.figure(figsize=(n_images * 1.5, 3))
    for image_index in range(n_images):
        plt.subplot(2, n_images, 1 + image_index)
        plot_image(images[image_index])
        plt.subplot(2, n_images, 1 + n_images + image_index)
        plot_image(reconstructions[image_index])

show_reconstructions(variational_ae, normal_data, 30)
plt.show()
```



```
show_reconstructions(variational_ae, valid_data, 30)
plt.show()
```



```
show_reconstructions(variational_ae, normal_valid_data, 30)
plt.show()
```



```
show_reconstructions(variational_ae, abnormal_valid_data, 30)
plt.show()
```



```
show_reconstructions(variational_ae, test_data, 30)
plt.show()
```



```
show_reconstructions(variational_ae, normal_test_data, 30)
plt.show()
```




```
show_reconstructions(variational_ae, abnormal_test_data, 30)
plt.show()
```



1-Dim plot of pixels of the first normal test data

```
reconstructions_nl_test = variational_ae.predict(normal_test_data)
```

```
plt.figure(figsize=(25,7))
plt.plot(normal_test_data[0].ravel(), 'r')
plt.plot(reconstructions_nl_test[0].ravel(), 'g')
plt.fill_between(np.arange(28*28), reconstructions_nl_test[0].ravel(), normal_test_data[0].ravel(), color='blue')
plt.legend(labels=["Input", "Reconstruction", "Error"])
plt.show()
```

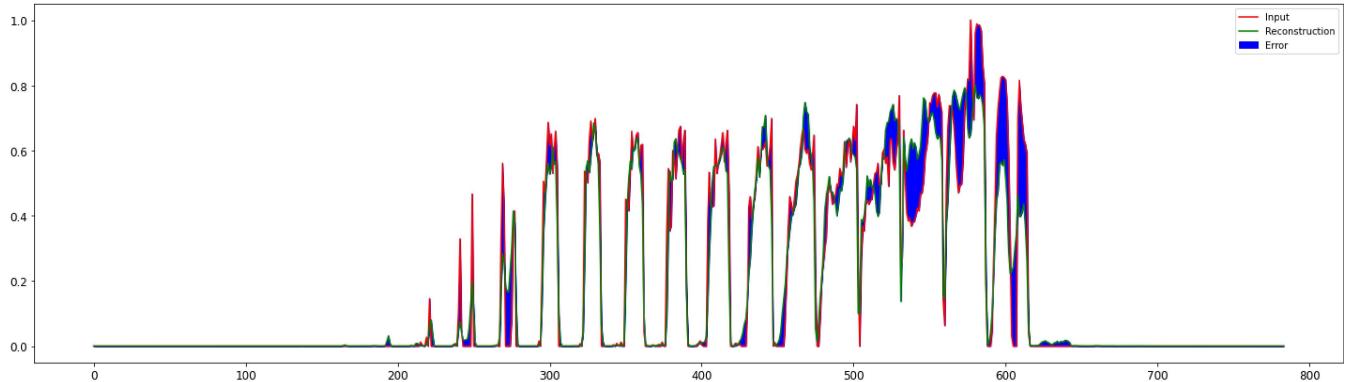


1-Dim plot of pixels of the first abnormal test data

```
reconstructions_abn_test = variational_ae.predict(abnormal_test_data)
```

```
plt.figure(figsize=(25,7))
plt.plot(abnormal_test_data[0].ravel(), 'r')
```

```
plt.plot(reconstructions_abn_test[0].ravel(), 'g')
plt.fill_between(np.arange(28*28), reconstructions_abn_test[0].ravel(), normal_test_data[0].ravel())
plt.legend(labels=["Input", "Reconstruction", "Error"])
plt.show()
```

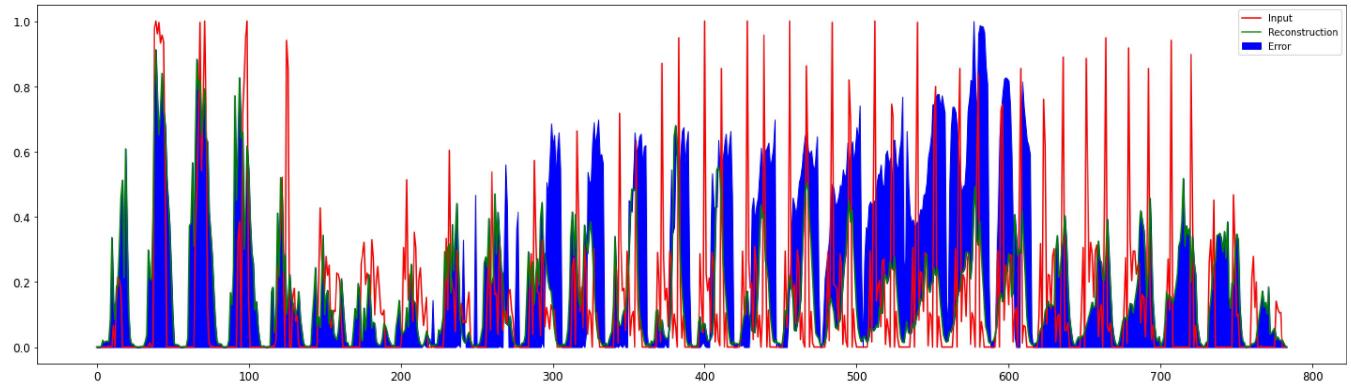

▼ Distributions of the reconstruction losses and the calculation of the threshold.

Distribution of the reconstruction losses of the normal training data

```
reconstructions = variational_ae.predict(normal_data)
train_loss = tf.keras.losses.mae(reconstructions.reshape(-1, 784), normal_data.reshape(-1, 784))
plt.figure(figsize=(10,5))
plt.hist(train_loss[None,:], bins=100)
threshold1 = np.mean(train_loss) + 2.5*np.std(train_loss)
plt.axvline(threshold1,c='g')
plt.xlabel("MAE reconstruction loss of the normal training data")
plt.ylabel("No of examples")
plt.show()
```



```
mean1 = np.mean(train_loss)
std1 = np.std(train_loss)
print("Mean: ", mean1)
print("Std: ", std1)
```

```
Mean:  0.05321632
Std:  0.01828033
```

```
#
```

```
threshold_train_mean_2_5_std = np.mean(train_loss) + 2.5*np.std(train_loss)
print("Threshold based on the mean of the training data MAE reconstruction losses + 2.5 std:
```

```
Threshold based on the mean of the training data MAE reconstruction losses + 2.5 std:  6
```

```
◀ MAE RECONSTRUCTION LOSS OF THE NORMAL TRAINING DATA ▶
```

```
threshold1 = threshold_train_mean_2_5_std
```

Distribution of the reconstruction losses of the abnormal validation data

```
reconstructions = variational_ae.predict(abnormal_valid_data)
abn_valid_loss = tf.keras.losses.mae(reconstructions.reshape(-1,784), abnormal_valid_data.reshape(-1,784))
plt.figure(figsize=(10,5))
plt.hist(abn_valid_loss[None, :], bins=100)
threshold2 = np.mean(abn_valid_loss) - np.std(abn_valid_loss)
plt.axvline(threshold2,c='cyan')
plt.axvline(threshold1,c='g')
plt.xlabel("MAE reconstruction loss of the abnormal validation data")
plt.ylabel("No of examples")
plt.show()
```

```
abnormal_valid_mean_loss = np.mean(abn_valid_loss)
abnormal_valid_mean_loss, np.std(abn_valid_loss)

(0.20684758, 0.043670606)
```


```
threshold2 = abnormal_valid_mean_loss - np.std(abn_valid_loss)
print("Threshold2: ", threshold2)
```

Threshold2: 0.16317697

Distribution of the reconstruction losses of the normal validation data

MAE reconstruction loss of the abnormal validation data

```
reconstructions = variational_ae.predict(normal_valid_data)
nl_valid_loss = tf.keras.losses.mae(reconstructions.reshape(-1,784), normal_valid_data.reshape(-1,784))
plt.figure(figsize=(10,5))
plt.hist(nl_valid_loss[None, :], bins=100)
threshold3 = np.mean(nl_valid_loss) + np.std(nl_valid_loss)
plt.axvline(threshold3, c='magenta')
plt.axvline(threshold2, c='cyan')
plt.axvline(threshold1, c='g')
plt.xlabel("MAE reconstruction loss of the normal validation data")
plt.ylabel("No of examples")
plt.show()
```

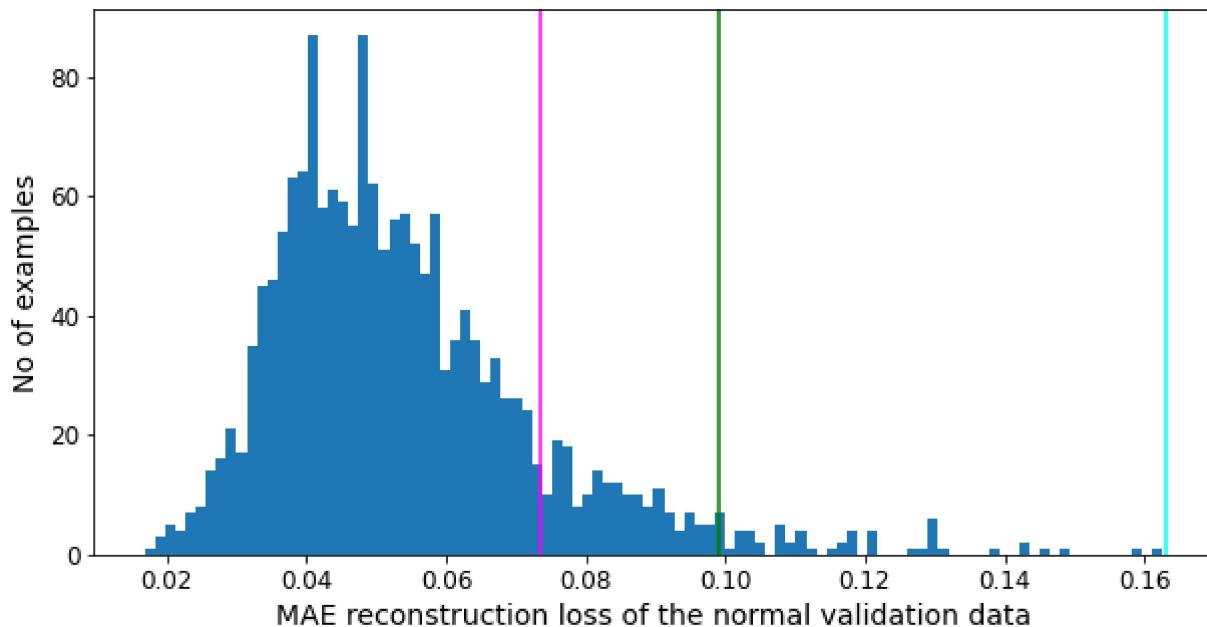

```
normal_valid_mean_loss = np.mean(nl_valid_loss)
```

```
normal_valid_mean_loss, np.std(nl_valid_loss)
```

```
(0.05409898, 0.019528337)
```

```
threshold3 = normal_valid_mean_loss + np.std(nl_valid_loss)
print("Threshold3: ", threshold3)
```

```
Threshold3: 0.073627315
```

Calculation of a preliminary threshold based on $(\text{threshold2} + \text{threshold3}) / 2$ = Average of (mean + std of the distribution of the reconstruction losses of the normal validation data) and (mean - std of the distribution of the reconstruction losses of the abnormal validation data)

```
Avg_of_threshold_2_3 = (threshold2 + threshold3)/2
print("Average of threshold 2 and 3: ", Avg_of_threshold_2_3)
```

```
Average of threshold 2 and 3: 0.1184021383523941
```

```
threshold4 = Avg_of_threshold_2_3
```

Calculation of the threshold that gives the best accuracy on the validation data and set this as the threshold.

```
def predict(model, data, threshold):
    reconstructions = model.predict(data)
    loss = tf.keras.losses.mae(reconstructions.reshape(-1, 784), data.reshape(-1, 784))
    return tf.math.less(loss, threshold)
```

```
increment = (abnormal_valid_mean_loss - normal_valid_mean_loss)/100
thresholds = np.arange(normal_valid_mean_loss, abnormal_valid_mean_loss, increment)
thrs_size = thresholds.shape[0]
accuracies = np.zeros(thrs_size)
for i in range(thrs_size):
    preds = predict(variational_ae, valid_data, thresholds[i])
    accuracies[i] = accuracy_score(preds, valid_labels_T_F)
argmax = np.argmax(accuracies)
valid_data_best_threshold = thresholds[argmax]
print("The best threshold based on validation data: ", valid_data_best_threshold)
```

```
The best threshold based on validation data: 0.11825339049100882
```

```
thr_acc = np.zeros((thrs_size, 2))
thr_acc[:, 0] = thresholds
```

```

thr_acc[:, 1] = accuracies
thr_acc[argmax-2:argmax+3]

array([[0.11519842, 0.98048569],
       [0.1167259 , 0.98005204],
       [0.11825339, 0.98135299],
       [0.11978088, 0.98091934],
       [0.12130836, 0.98091934]])

```

```
threshold5 = valid_data_best_threshold
```

```
threshold = thresholds
```

Distribution of the reconstruction losses of all the validation data (normal and abnormal)


The blue line is threshold4 (= the average of threshold3 [magenta] and threshold2 [cyan]).

The red line is the threshold that gives the best accuracy for the validation data.

```

reconstructions = variational_ae.predict(valid_data)
valid_loss = tf.keras.losses.mae(reconstructions.reshape(-1,784), valid_data.reshape(-1,784))
plt.figure(figsize=(20,5))
plt.hist(valid_loss[None, :], bins=100)
plt.axvline(threshold, c='r')
plt.axvline(threshold4, c='b')
plt.axvline(threshold2, c='cyan')
plt.axvline(threshold3, c='magenta')
plt.axvline(threshold1, c='green')
plt.xlabel("MAE reconstruction loss of the validation data")
plt.ylabel("No of examples")
plt.show()

```

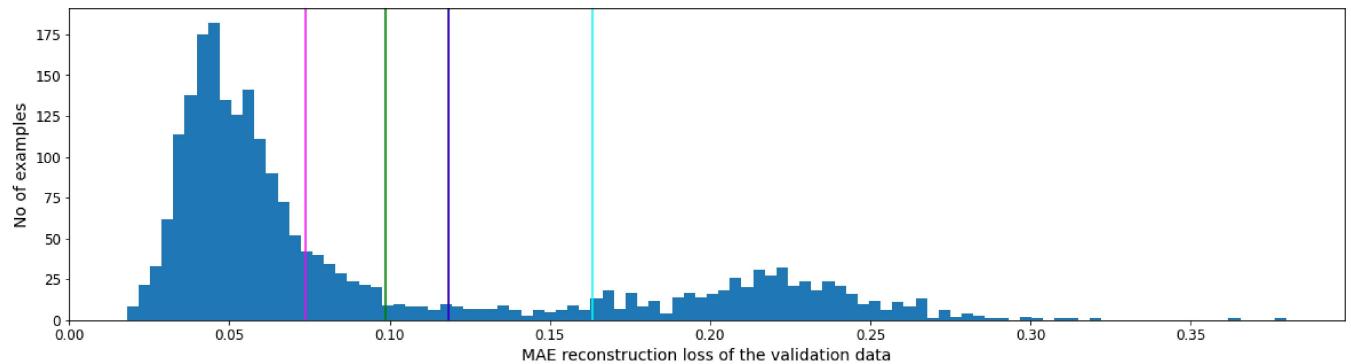


▼ Distribution of the reconstruction losses of the test data (normal and abnormal)

The blue line is threshold4 (= the average of threshold3 [magenta] and threshold2 [cyan]).

The red line is the threshold that gives the best accuracy for the validation data.

```
reconstructions = variational_ae.predict(test_data)
test_loss = tf.keras.losses.mae(reconstructions.reshape(-1,784), test_data.reshape(-1,784))
plt.figure(figsize=(20,5))
plt.hist(test_loss[None, :], bins=100)
plt.axvline(threshold, c='r')
plt.axvline(threshold4, c='b')
plt.axvline(threshold2, c='cyan')
plt.axvline(threshold3, c='magenta')
plt.xlabel("MAE reconstruction loss of the test data")
plt.ylabel("No of examples")
plt.show()
```

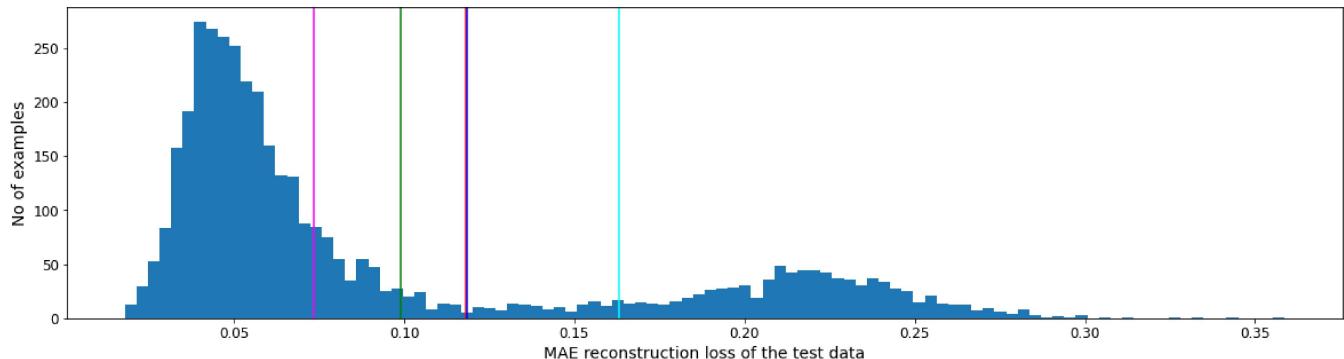

▼ Mean and standard deviation of reconstruction losses for normal and abnormal test data

```
reconstructions = variational_ae.predict(normal_test_data)
nl_test_loss = tf.keras.losses.mae(reconstructions.reshape(-1,784), normal_test_data.reshape(
np.mean(nl_test_loss), np.std(nl_test_loss))

(0.05498868, 0.020173676)
```

```
reconstructions = variational_ae.predict(abnormal_test_data)
abn_test_loss = tf.keras.losses.mae(reconstructions.reshape(-1,784), abnormal_test_data.reshape(
np.mean(abn_test_loss), np.std(abn_test_loss))

(0.20798454, 0.04208412)
```

Calculation of the accuracy and the confusion matrix on the test data with threshold set based on the best threshold from the validation data

```
# def predict(model, data, threshold):
#   reconstructions = model.predict(data)
#   loss = tf.keras.losses.mae(reconstructions.reshape(-1, 784), data.reshape(-1, 784))
#   return tf.math.less(loss, threshold)
mean_nl_test_loss = np.mean(nl_test_loss)
std_nl_test_loss = np.std(nl_test_loss)

mean_abn_test_loss = np.mean(abn_test_loss)
std_abn_test_loss = np.std(abn_test_loss)

def print_stats(predictions, labels):
    cf = confusion_matrix(labels, predictions)

    print("mean_nl_test_loss: {}".format(mean_nl_test_loss))
    print("std_nl_test_loss: {}".format(std_nl_test_loss))
    print("mean_abn_test_loss: {}".format(mean_abn_test_loss))
    print("std_abn_test_loss: {}".format(std_abn_test_loss))

    print("Confusion Matrix: \n prediction: F      T ")
    print("          {}  {}".format(preds[preds == False].shape[0], preds[preds == True].sh
    print(" label: F  [[{}  {}]]  {}".format(cf[0,0], cf[0,1], test_labels_T_F[test_labels_T_
    print("          T  [{}, {}]]  {}".format(cf[1,0], cf[1,1], test_labels_T_F[test_labels_T_
    print("Accuracy = {}".format(accuracy_score(labels, predictions)))
    print("Precision = {}".format(precision_score(labels, predictions)))
    print("Recall = {}".format(recall_score(labels, predictions)))

preds = predict(variational_ae, test_data, threshold)
print_stats(preds, test_labels_T_F)

⇒ mean_nl_test_loss: 0.05498867854475975
    std_nl_test_loss: 0.020173676311969757
    mean_abn_test_loss: 0.2079845368862152
    std_abn_test_loss: 0.04208412021398544
    Confusion Matrix:
        prediction: F      T
                  999  3001
    label: F  [[964  36]  1000
              T  [35  2965]]  3000
    Accuracy = 0.98225
    Precision = 0.988003998667111
    Recall = 0.9883333333333333

print(confusion_matrix(test_labels_T_F, preds))
```

```
[[ 964   36]
 [ 35 2965]]
```

Extra accuracy info

Just informative. Please record the above accuracy.

Accuracy on the test data with threshold set based on (threshold2 + threshold3) / 2 = Average of (mean + std of the distribution of the reconstruction losses of the normal validation data) and (mean - std of the distribution of the reconstruction losses of the abnormal validation data)

```
preds = predict(variational_ae, test_data, Avg_of_threshold_2_3)
print_stats(preds, test_labels_T_F)

mean_nl_test_loss: 0.05498867854475975
std_nl_test_loss: 0.020173676311969757
mean_abn_test_loss: 0.2079845368862152
std_abn_test_loss: 0.04208412021398544
Confusion Matrix:
 prediction: F      T
             999  3001
 label: F  [[964   36]    1000
            T  [35   2965]]  3000
Accuracy = 0.98225
Precision = 0.988003998667111
Recall = 0.9883333333333333
```

Accuracy on the test data with threshold set based on the mean of the training data MAE reconstruction losses + 2.5 std

```
preds = predict(variational_ae, test_data, threshold_train_mean_2_5_std)
print_stats(preds, test_labels_T_F)

mean_nl_test_loss: 0.05498867854475975
std_nl_test_loss: 0.020173676311969757
mean_abn_test_loss: 0.2079845368862152
std_abn_test_loss: 0.04208412021398544
Confusion Matrix:
 prediction: F      T
             1093  2907
 label: F  [[979   21]    1000
            T  [114   2886]]  3000
Accuracy = 0.96625
Precision = 0.9927760577915377
Recall = 0.962
```

Extra Info

Giving the VAE codings (please see book) (Just informative, not the goal here)

```
def plot_multiple_images(images, n_cols=None):
    n_cols = n_cols or len(images)
    n_rows = (len(images) - 1) // n_cols + 1
    if images.shape[-1] == 1:
        images = np.squeeze(images, axis=-1)
    plt.figure(figsize=(n_cols, n_rows))
    for index, image in enumerate(images):
        plt.subplot(n_rows, n_cols, index + 1)
        plt.imshow(image, cmap="binary")
        plt.axis("off")

codings = tf.random.normal(shape=[12, codings_size])
images = variational_decoder(codings).numpy()
plot_multiple_images(images, 4)
# save_fig("vae_generated_images_plot", tight_layout=False)
```



```
codings_grid = tf.reshape(codings, [1, 3, 4, codings_size])
larger_grid = tf.image.resize(codings_grid, size=[5, 7])
interpolated_codings = tf.reshape(larger_grid, [-1, codings_size])
images = variational_decoder(interpolated_codings).numpy()

plt.figure(figsize=(7, 5))
for index, image in enumerate(images):
    plt.subplot(5, 7, index + 1)
    if index%7%2==0 and index//7%2==0:
        plt.gca().get_xaxis().set_visible(False)
        plt.gca().get_yaxis().set_visible(False)
    else:
        plt.axis("off")
    plt.imshow(image, cmap="binary")
# save_fig("semantic_interpolation_plot", tight_layout=False)
```



✓ 1s completed at 3:25 PM

● ✕