


Fungiku


Current functionality, controls and states · redesign inventory

Current purpose: a generated region-logic puzzle with a tactile mark/place interaction, three-life error model and a persistent earned-assist economy.

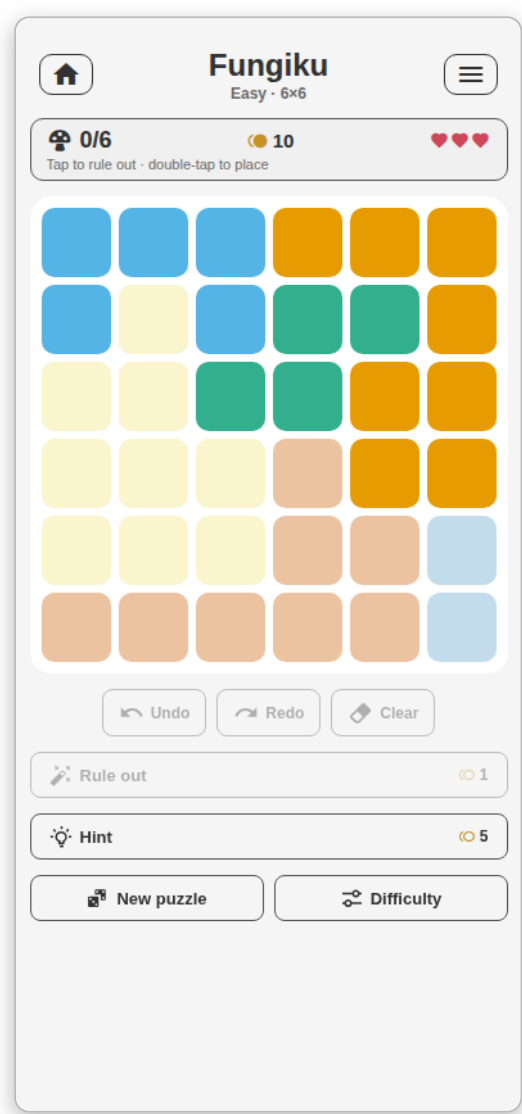


Easy 5×5 board.

1. Rules and entry

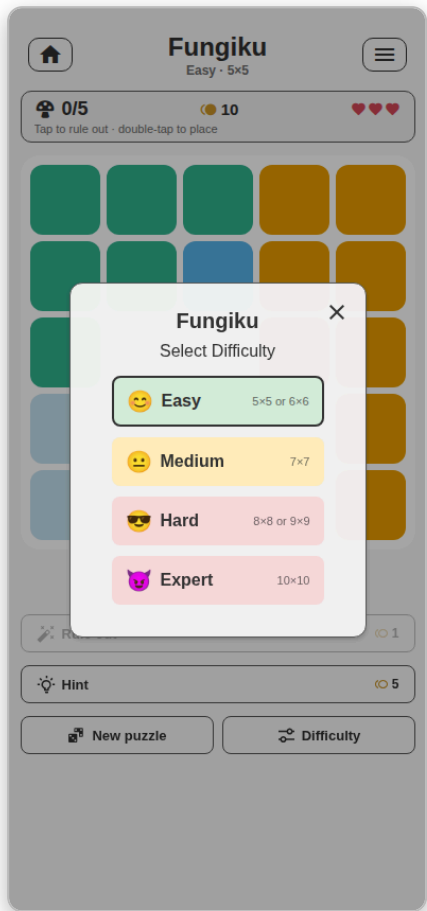

Difficulty and board-size choice.

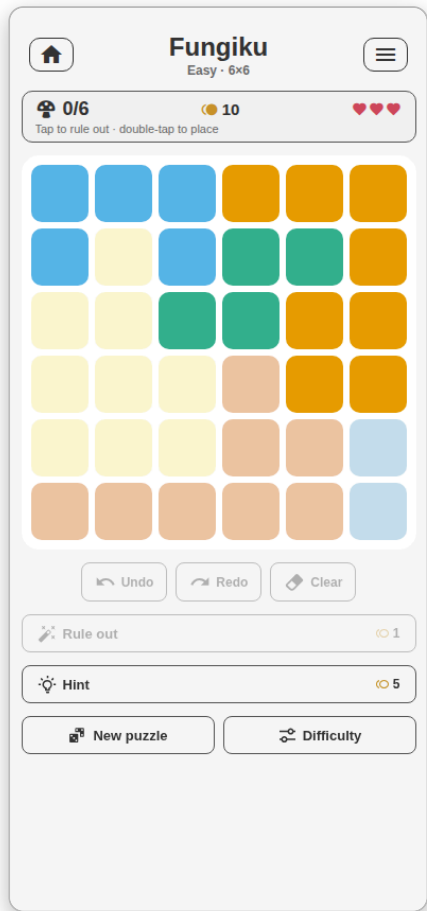

Main board and assistance toolbar.

Player goal


- Place exactly one mushroom in every row.
- Place exactly one mushroom in every column.
- Place exactly one mushroom in every coloured region.
- No two mushrooms may touch, including diagonally.

Difficulty	Board size	Current positioning
Easy	5x5 or 6x6	Short introduction.
Medium	7x7	Standard play.
Hard	8x8 or 9x9	Large-board challenge.
Expert	10x10	Maximum density.

2. Gesture and control inventory

Control / gesture	What it does	Cost / consequence
Tap cell	Toggles an × rule-out mark.	No wallet cost.
Double-tap cell	Places a mushroom.	A wrong mushroom is flagged and costs one life.
Drag across cells	Sweeps a run of × marks.	Fast elimination input.
Undo / Redo	Traverses player action history.	Disabled at history ends.
Clear	Clears current player marks through a confirmation path.	Puzzle identity remains.
Rule out	Automatically marks cells that can be logically excluded.	Costs 1 coin; unavailable when nothing can be marked.
Hint	Highlights/explains a forced next move through a positioned popover.	Costs 5 coins.
Reveal	Places/reveals help when no ordinary forced assist remains.	Costs 20 coins.
New puzzle	Generates the next puzzle at the current difficulty.	Replaces current board.
Difficulty	Opens Easy/Medium/Hard/Expert choice.	Starts a new size-appropriate puzzle.
Game menu	Opens puzzle and difficulty actions.	Header action.
Back to games	Returns to hub and preserves resumable state.	Header action.

3. Status, economy and feedback

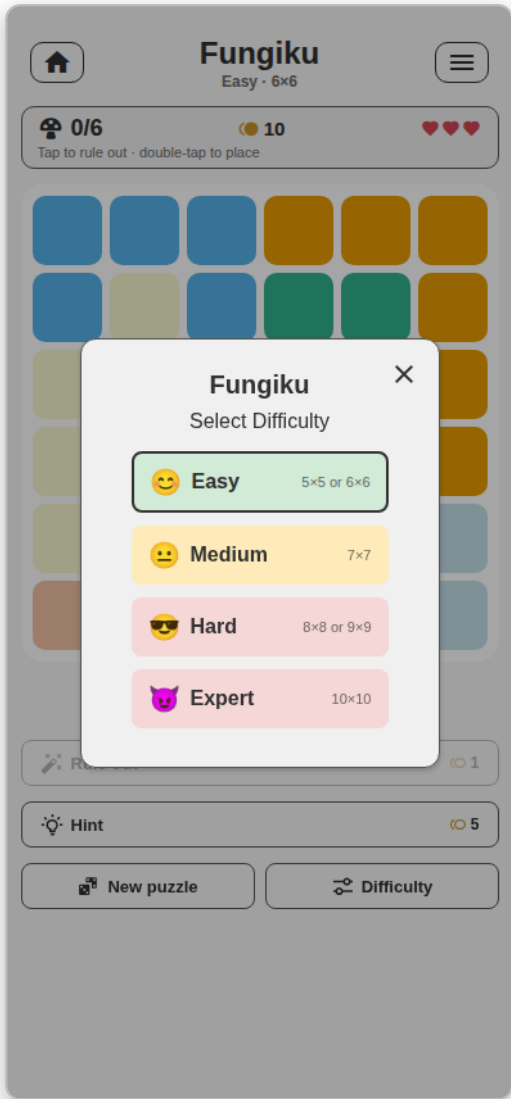

Difficulty/menu layer over a live board.

Persistent/visible state

- **Progress:** placed mushrooms out of required total.
- **Wallet:** coin count persists separately from the current puzzle.
- **Lives:** three mushroom icons; incorrect placements consume one.
- **Puzzle:** generated seed, coloured regions, solution and player marks persist for resume.

Special states

State	Presentation / action
Hint available	Popover anchors to a relevant cell and describes a forced deduction.
No forced step	Reveal becomes the expensive fallback.
Wrong mushroom	Immediate error feedback and loss of one life.

Out of lives	Modal explains the reset; the same puzzle restarts.
Solved	Mushrooms animate and board ripples; win modal reports reward/next action.
Low wallet	Daily floor prevents the assist economy from becoming permanently unwinnable.

4. Product/design discussion prompts

Teachability: The rule set is less familiar than Sudoku. How should row/column/region/no-touch rules be introduced and recalled?

Primary interaction: Tap means ✕ while double-tap means mushroom. Is that discoverable and accessible enough, especially with drag-to-mark?

Economy: Do coins create a satisfying long-term loop, or add monetization-like language to a free logic puzzle?

Error philosophy: Three lives and immediate correctness checking make this a guided game rather than paper-puzzle simulation. Is that intentional?

Assistance hierarchy: Rule out, Hint and Reveal overlap. Should they remain three paid levels or become one adaptive help action?

Board scaling: 10×10 must coexist with status and two control rows on a phone. Decide which controls can move off the main play surface.

Do not lose in redesign: coloured-region differentiation, all four rules, unambiguous ✕ versus mushroom state, three-life consequences, wallet transparency, undo/redo, hint anchoring, resume, out-of-lives recovery and solved celebration.