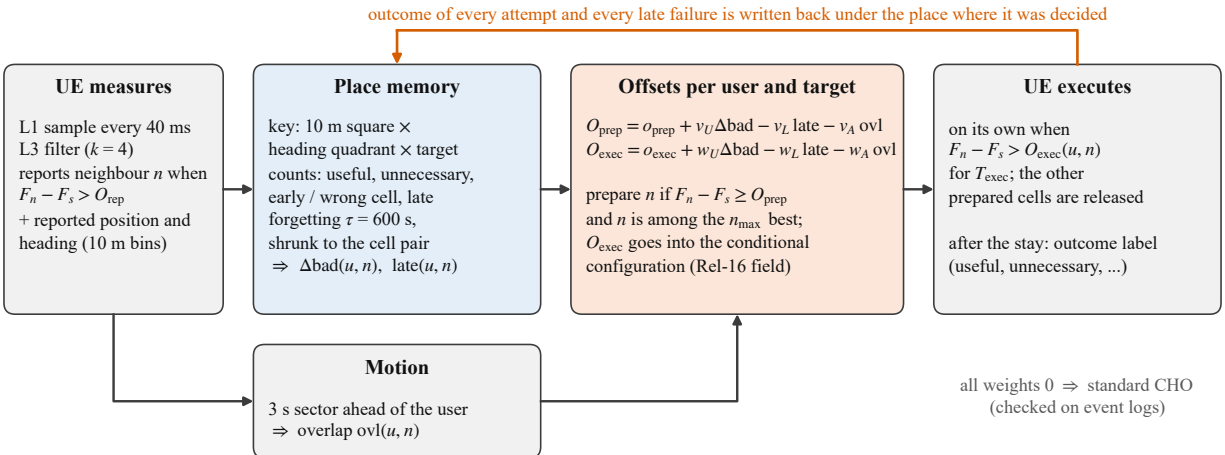

outcome of every attempt and every late failure is written back under the place where it was decided
UE measures
L1 sample every 40 ms
L3 filter ($k = 4$)
reports neighbour n when
$F_n - F_s > O_{\text{rep}}$
+ reported position and
heading (10 m bins)
Place memory
key: 10 m square ×
heading quadrant × target
counts: useful, unnecessary,
early / wrong cell, late
forgetting $\tau = 600$ s,
shrunk to the cell pair
⇒ $\Delta\text{bad}(u, n)$, $\text{late}(u, n)$
Offsets per user and target
$O_{\text{prep}} = o_{\text{prep}} + v_U \Delta\text{bad} - v_L \text{late} - v_A \text{ovl}$
$O_{\text{exec}} = o_{\text{exec}} + w_U \Delta\text{bad} - w_L \text{late} - w_A \text{ovl}$
prepare n if $F_n - F_s \geq O_{\text{prep}}$
and n is among the $n_{\max}$ best;
O_{exec} goes into the conditional
configuration (Rel-16 field)
UE executes
on its own when
$F_n - F_s > O_{\text{exec}}(u, n)$
for T_{exec}; the other
prepared cells are released
after the stay: outcome label
(useful, unnecessary, ...)
Motion
3 s sector ahead of the user
⇒ overlap $\text{ovl}(u, n)$
all weights 0 ⇒ standard CHO
(checked on event logs)