STREAM NO.:4927


REMARKS FOR MECHANICAL SUBCONTRACTOR:

1) LINES 1.1/2" AND SMALLER SHALL BE SUPPORTED IN FIELD IF NOT OTHERWISE INDICATED.

2) ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.127 AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION.

3) FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL 

✓, ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT

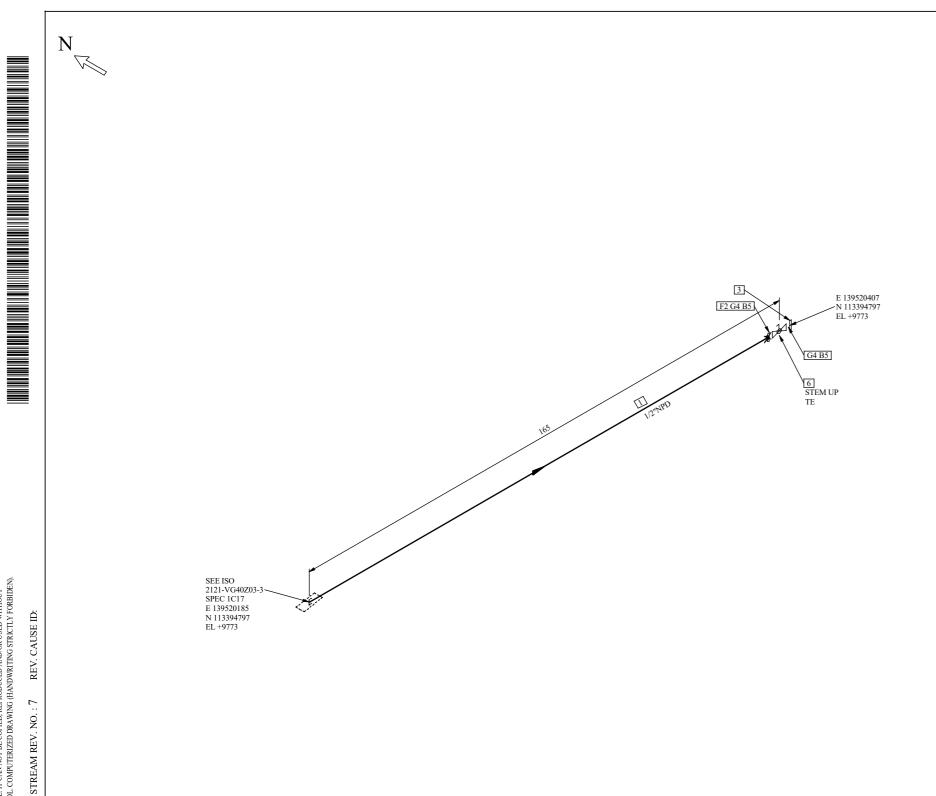

BILL OF MATERIAL HOLD COMPONENT DESCRIPTION ITEM CODE QTY STATUS (IN) PIPE - A106-B PE SMLS T01AC03Z02 S-XS < PIPA010A11/2XS> (L-6679) I132777 FLANGES SW FLANGE ASME B16.5 150# A105N RFFE SWE 125 - 250 AARH F02CDC44B105 S-XS I5378341 <SWFA300R151/2XS> (L-295) BLIND FLANGE ASME B16.5 150# A105N RFFE NREQD 125 - 250 AARH F10CDC44B005 I1652355 <BLFA300R151/2> (L-140) GASKETS SPIRAL WOUND GASKET ASME B16.20 150# RFTBE 304/GRAFOIL CARBON STEEL SS 304 1/2 163508894 ASME B16.5 G03GDP1IS12 < N/A > (N/A) STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE I010B0301 153437179 <SB2R51G1/221/2> - 2 NUTS PER BOLT - 60 mm Length VALVES / IN-LINE ITEMS BALL VALVE API 608 150# A216-WCB RFFE 316/R-PTFE, GF B7/2H 125 - 250 AARH I10013685 2PSB-FULL BORE FLOATING BALL OHW ASME B16.5 V04JDC29BZZG NREQD <N/A> (N/A)

4) FOR EXTRA PIPE LENGTH REFER TO 42/4-LZ-PC-000000003. 5) GUSSETING TO BE IMPLEMENTED BY MECHANICAL SUBCONTRACTOR AS PER 45-L-45-000-2-00-80004 / 4274-XH-SG-000000002. 6) CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED. 7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN. 8) ACTUAL CUT LENGTH OF PIPE AND FIELD WELDS SHALL BE DEFINED BY MECHANICAL SUBCONTRACTOR (REF.TO 4274-LZ-PC-00000603).									REFERENCE
9) WHERE EARTHING BONDING IS REQUIRED, MECHANICAL SUBCONTRACTOR TO PERFORM IT BASED ON DOC. 45-P-000-7-06-00902/ 4274 -NN-DW-00000002 AND ASSEMBLY NO FEA005 AND FE019.									Signature for construction is shown
SUPPORTS LEGEND: DENOTES PARTS LIST NO SUPPORT G=GUIDE F=AXIAL STOP B=ANCHOR M=SPRING S=TEHLON PAD WHEREA WITHOUT NUMBERING IS INDICATED, THIS MEANS THAT THERE IS A REST DIRECTLY ON STEEL STRUCTURE.									on Iso list of relevant CWA
								STRESS CALC. Nº	TITLE
								P & ID	ISOMETRIC DRAWING
								19-A-19-000-1-01-00001 sheet 51 LINE LIST N°	LINE
00	ISSUED FOR REFERENCE	10-MA	AR-2023	M.YADAV	P.VAZE	G.PAGANONI		19-L-19-000-2-00-80602	
REV.	DESCRIPTION	DAT	TE	DRW. BY	CHECK BY	APPR. BY		PIPE LAYOUT N° 19-L-19-000-2-00-86197 sheet 3	1/2"-VG-40Z03-1C17

REFERENCE ure for construction is shown Iso list of relevant CWA

**ISSUED FOR** 

PAINTING SCHEME (3) PIPING CLASS 1C17

PIPE MATERIAL

HEAT TREATMENT (PWHT)

INSULATION CODE / THK. (mm)

CS

NOTES: 1. FOR TECHNICAL DETAILS SEE LINE LIST.

2. FOR VENT, DRAIN OR INSTRUMENT CONNECTION DETAILS SEE 45-L-45-000-2-00-80102

3. WELDING ACCORDING TO 45-L-45-000-2-00-80021

5. CODE SHOWN IN BOM BETWEEN "<" & ">" DENOTES REPSOL UNICODE. "<N/A>" MEANS UNICODE IS "NOT AVAILABLE"

CONTRACTOR: CONTRACTOR DRAWING NUMBER: PROJECT:

WELDING CLASS (4) LOW LINEAL DENSITY POLYETHILENE (PEL) AND POLYPROPYLENE (PP) PLANTS PED CATEGORY FOR PROJECT - ALBA PROJECT Art 4.3 REPSQL

CLIENT / COMPLEX REPSOL POLYMEROS/ SINES INDUSTRIAL COMPLEX

4001008

DRAWING NUMBER ANNEX 00 19-000-2-02-00001 sheet 2121VG40Z03-5

4274-XH-DL-2121VG40Z03-5