REV.

SUPPORTS LEGEND:

ISSUED FOR REFERENCE

ISSUED FOR REFERENCE

REMARKS FOR MECHANICAL SUBCONTRACTOR:

1) LINES 1.1/2" AND SMALLER SHALL BE SUPPORTED IN FIELD IF NOT OTHERWISE INDICATED.

DESCRIPTION

6) CROSSING BETWEEN WELDS ON PIPELINE SHALL NOT BE ADMITTED.

2) ALL DIMENSION AND PROPER CONFIGURATION FOR LINES NPS 1.1/2" AND SMALLER SHALL BE CHECKED IN FIELD BEFORE CONSTRUCTION.

3) FOR THE COMPONENTS MARKED AS FIELD WELDED WITH THIS SYMBOL ✗, ONE WELD FOR ADJUSTMENT OF IN LINE COMPONENT MUST BE LEFT

A=RESTING SUPPORT G=GUIDE F=AYAL STOP B=ANCHOR M=SPRING S=TEFLON PAD WHERE  $\Delta$  WITHOUT NUMBERING IS INDICATED, THIS MEANS THAT THERE IS A REST DIRECTLY ON STEEL STRUCTURE.

P.VAZE

P.VAZE

CHECK BY

G.PAGANONI

G.PAGANONI

APPR. BY

M.YADAV

U.CHAVAN

29-MAR-24

21-JUL-23

TRESS CALC. Nº

PIPE LAYOUT No

APPR. CLIENT

19-A-19-000-1-01-00001 sheet 32

19-L-19-000-2-00-86197 sheet 5

19-L-19-000-2-00-80602


4) FOR EXTRA PIPE LENGTH REFER TO 4274-LZ-PC-00000603.
5) GUSSETING TO BE IMPLEMENTED BY MECHANICAL SUBCONTRACTOR AS PER 45-L-45-000-2-00-80004 / 4274-XH-SG-00000002.

□ DENOTES PARTS LIST NO PIPE SUPPORT —

() CROSSING BETWEEN WEEDS ON THE ELING STALE NOT BE ADMITTED.

7) IN CASE OF DISCREPANCIES BETWEEN DATA SHOWN ON ISO AND IN LINE LIST (AS APPLICABLE, DATA SHOWN IN LINE LIST GOVERN.

8) ACTUAL CUT LENGTH OF PIPE AND FIELD WELDS SHALL BE DEFINED BY MECHANICAL SUBCONTRACTOR (REF.TO 4274-LZ-PC-00000603

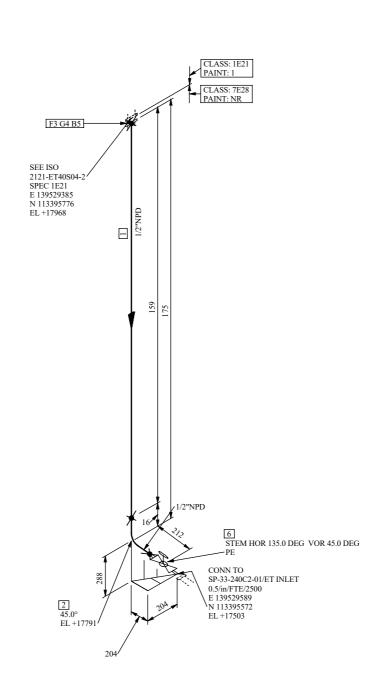

(L-PIP110) 45 LR ELBOW ASME B16.9 A403-WP304/304L DG BE SMLS C02DL2FV01 S-80S I2376173 LANGES SW FLANGE ASME B16.5 600# A182-F316/316L DUAL GR RFFE SWE 125 - 250 AARH I3184198 F02CHL1MB105 S-80S <SWFB34D4651/280S> (L-SWF38) SPIRAL WOUND GASKET ASME B16.20 600# RFTBE 304/GRAFOIL SS 304 SS 304 ASME I1169016 B16.5 G03GHP1IS04 < N/A > (N/A) BOLTS STUD BOLTS&NUTS ASME B18.31.2/ B18.2.2 A193-B7/A194-2H INCH SIZE I010B0301 153437223 <SB2R51G1/231/4> - 2 NUTS PER BOLT - 80 mm Length ALVES / IN-LINE ITEMS NIPPLED BALL VALVE BS EN ISO 17292 800# A182-F316/316L DUAL GR PE PE 164005281 316/PEEK A193-B8M CL2/8MA 3PSB-FULL BORE FLOATING BALL OHW SCH1-80S SCH2-80S LENGTH 75mm V36FIL1MZZAQ NREQD <B61 2L-AL293> (L-AL293) PIPE MATERIAL NOTES: 1. FOR TECHNICAL DETAILS SEE LINE LIST. 2. FOR VENT, DRAIN OR INSTRUMENT CONNECTION DETAILS SEE 45-L-45-000-2-00-80102 304, dual grade 3. WELDING ACCORDING TO 45-L-45-000-2-00-80021 HEAT TREATMENT (PWHT) 5. CODE SHOWN IN BOM BETWEEN "<" & ">" DENOTES REPSOL UNICODE. "<N/A>" MEANS UNICODE IS "NOT AVAILABLE" PAINTING SCHEME (3) CONTRACTOR: CONTRACTOR DRAWING NUMBER: PROJECT: NR PIPING CLASS 4001008 4274-XH-DL-2121TEA40C01-4 7E28 WELDING CLASS (4) LOW LINEAL DENSITY POLYETHILENE (PEL) CLIENT / COMPLEX AND POLYPROPYLENE (PP) PLANTS REPSOL POLYMEROS/ PED CATEGORY FOR PROJECT - ALBA PROJECT SINES INDUSTRIAL COMPLEX REPSQL Art 4.3 INSULATION CODE / THK. (mm) DRAWING NUMBER ANNEX 01 19-000-2-02-00001 sheet 2121TEA40C01-4

BILL OF MATERIAL

COMPONENT DESCRIPTION

PIPE - A312-TP304/304L DUAL GR PE SMLS T01AL2CZ02 S-80S <PIPB04DA21/280S>

HOLD

STATUS

QTY

ITEM CODE

I2257955

(IN)

1/2"-TEA-40C01-7E28

**ISSUED FOR** 

REFERENCE

Signature for construction is shown

FILENAME: 19-000-2-02-00001 sheet 2121TEA40C01-4.dwg