

mkRPG

Generated by Doxygen 1.7.6.1

Thu Nov 17 2016 09:30:47

Contents

1	Todo List	1
2	Deprecated List	3
3	Namespace Index	5
3.1	Namespace List	5
4	Class Index	7
4.1	Class Hierarchy	7
5	Class Index	9
5.1	Class List	9
6	File Index	13
6.1	File List	13
7	Namespace Documentation	15
7.1	src::parsing::map_parser Namespace Reference	15
7.1.1	Detailed Description	15
7.1.2	Function Documentation	15
7.1.2.1	get_size	15
7.1.2.2	map_parser	15
7.1.2.3	parse_cell	15
8	Class Documentation	17
8.1	src.path.Archi Class Reference	17
8.1.1	Detailed Description	17
8.1.2	Member Function Documentation	17

8.1.2.1	get_src_dir	17
8.1.2.2	get_src_file	18
8.1.2.3	get_static_dir	18
8.1.2.4	get_static_file	18
8.1.2.5	get_xml_dir	18
8.1.2.6	get_xml_file	18
8.1.2.7	list_files	18
8.2	src.backgroundLayer.BackgroundLayer Class Reference	18
8.3	src.world.BaseObject Class Reference	19
8.3.1	Detailed Description	19
8.3.2	Member Function Documentation	20
8.3.2.1	contextEval	20
8.3.2.2	load	20
8.4	BColor Class Reference	20
8.4.1	Detailed Description	21
8.4.2	Constructor & Destructor Documentation	21
8.4.2.1	BColor	21
8.4.2.2	BColor	21
8.4.3	Member Function Documentation	21
8.4.3.1	color	21
8.4.3.2	colorChanged	21
8.4.3.3	name	21
8.4.3.4	nameChanged	22
8.4.3.5	setColor	22
8.4.3.6	setColorQuiet	22
8.4.3.7	setName	22
8.4.3.8	setNameQuiet	22
8.4.4	Property Documentation	23
8.4.4.1	color	23
8.4.4.2	name	23
8.5	BDock Class Reference	23
8.5.1	Detailed Description	24
8.6	BDocksZone Class Reference	24
8.6.1	Member Enumeration Documentation	25

8.6.1.1	ScrollBarMode	25
8.7	BDockWidget Class Reference	25
8.7.1	Detailed Description	26
8.8	BinaryStateMachine Class Reference	26
8.8.1	Detailed Description	27
8.9	BLayout Class Reference	27
8.10	src.world.Cell Class Reference	27
8.11	Cell Class Reference	28
8.11.1	Detailed Description	28
8.12	CellDock Class Reference	29
8.13	CellType Class Reference	29
8.13.1	Detailed Description	30
8.14	CellTypeListModel Class Reference	30
8.14.1	Detailed Description	30
8.15	CellTypesDock Class Reference	30
8.16	src.cursescli.CellViewer Class Reference	31
8.17	src.character.Character Class Reference	31
8.18	src.chunk.Chunk Class Reference	32
8.19	src.cache.ChunkCache Class Reference	33
8.20	CICoords Class Reference	33
8.20.1	Detailed Description	34
8.21	src.client.Client Class Reference	34
8.21.1	Detailed Description	34
8.21.2	Constructor & Destructor Documentation	35
8.21.2.1	__del__	35
8.22	src.cursescli.Curses Class Reference	35
8.22.1	Detailed Description	35
8.23	Editor Class Reference	35
8.23.1	Detailed Description	36
8.24	src.world.Entity Class Reference	36
8.25	Game Class Reference	36
8.25.1	Detailed Description	37
8.25.2	Member Function Documentation	37
8.25.2.1	newIdent	37

8.26	GameObject Class Reference	37
8.26.1	Detailed Description	38
8.26.2	Constructor & Destructor Documentation	39
8.26.2.1	GameObject	39
8.26.3	Member Function Documentation	39
8.26.3.1	flags	39
8.26.3.2	getFlag	39
8.26.3.3	getParam	40
8.26.3.4	hasFlag	40
8.26.3.5	hasParam	40
8.26.3.6	ident	40
8.26.3.7	init	40
8.26.3.8	isValid	41
8.26.3.9	lastChildrenEdition	41
8.26.3.10	lastEdition	41
8.26.3.11	lastInternalEdition	41
8.26.3.12	params	41
8.26.3.13	setFlag	42
8.26.3.14	setParam	42
8.26.3.15	touch	42
8.27	src.cache.GlobalCache Class Reference	42
8.28	Image Class Reference	43
8.28.1	Detailed Description	43
8.28.2	Member Function Documentation	43
8.28.2.1	isValid	43
8.29	src.cache.ImageCache Class Reference	44
8.30	src.interactions.Interaction Class Reference	44
8.30.1	Detailed Description	45
8.31	src.printWorld.Interface Class Reference	45
8.32	src.interface.Interface Class Reference	45
8.32.1	Detailed Description	46
8.33	Intertie Class Reference	46
8.33.1	Detailed Description	46
8.34	src.layer.Layer Class Reference	47

8.35 Map Class Reference	47
8.35.1 Detailed Description	48
8.36 src.world.Map Class Reference	48
8.36.1 Member Function Documentation	48
8.36.1.1 fill	48
8.37 MapDock Class Reference	48
8.38 MapPainter Class Reference	49
8.38.1 Detailed Description	50
8.38.2 Member Enumeration Documentation	51
8.38.2.1 Element	51
8.38.3 Constructor & Destructor Documentation	51
8.38.3.1 MapPainter	51
8.38.3.2 MapPainter	51
8.38.4 Member Function Documentation	51
8.38.4.1 cooToPt	51
8.38.4.2 cooToPxl	51
8.38.4.3 hasHighlightedCell	52
8.38.4.4 highlightedCell	52
8.38.4.5 indToPt	52
8.38.4.6 isCell	52
8.38.4.7 mapSizeChanged	52
8.38.4.8 move	52
8.38.4.9 paint	52
8.38.4.10 preSelectedCellColor	53
8.38.4.11 ptToCoo	53
8.38.4.12 ptToPxl	53
8.38.4.13 pxlToCoo	53
8.38.4.14 pxlToPt	53
8.38.4.15 render	53
8.38.4.16 resize	53
8.38.4.17 resize	54
8.38.4.18 scale	54
8.38.4.19 selectedCellColor	54
8.38.4.20 setHighlightedCell	54

8.38.4.21	setHighlightedCell	54
8.38.4.22	setMap	54
8.38.4.23	setPaintedElement	54
8.38.4.24	setPaintedElements	55
8.38.4.25	setPreSelectedCellColor	55
8.38.4.26	setScale	55
8.38.4.27	setScaleDomain	55
8.38.4.28	setSelectedCellColor	55
8.38.4.29	setViewCenter	55
8.38.4.30	setViewCenter	56
8.38.4.31	setViewCenterQuiet	56
8.38.4.32	size	56
8.38.4.33	viewCenter	56
8.38.4.34	viewCenterChanged	56
8.38.4.35	virtualSize	56
8.38.4.36	zoom	57
8.39	MapsEditor Class Reference	57
8.39.1	Detailed Description	57
8.40	MapsListModel Class Reference	57
8.40.1	Detailed Description	58
8.41	src.map.MapViewer Class Reference	58
8.41.1	Member Function Documentation	59
8.41.1.1	neighbors_chunk	59
8.42	src.cursescli.MapViewer Class Reference	59
8.43	MapView Class Reference	59
8.43.1	Detailed Description	60
8.43.2	Member Enumeration Documentation	60
8.43.2.1	SelectionMode	60
8.44	src.network.NetworkClient Class Reference	61
8.44.1	Detailed Description	61
8.44.2	Member Function Documentation	61
8.44.2.1	askEntity	61
8.44.2.2	run	62
8.44.2.3	sendEvent	62

8.45	src.networkudp.NetworkClient Class Reference	62
8.46	src.network.NetworkServer Class Reference	62
8.46.1	Detailed Description	63
8.46.2	Constructor & Destructor Documentation	63
8.46.2.1	__init__	63
8.46.3	Member Function Documentation	63
8.46.3.1	run	63
8.46.3.2	sendOrder	63
8.46.3.3	waitForClients	63
8.47	src.networkudp.NetworkServer Class Reference	64
8.48	NewGame Class Reference	64
8.49	Object Class Reference	65
8.49.1	Detailed Description	65
8.50	ObjectEditor Class Reference	65
8.51	ObjectFlagTableModel Class Reference	65
8.52	ObjectParamTableModel Class Reference	66
8.53	src.world.ObjectType Class Reference	66
8.53.1	Detailed Description	66
8.53.2	Member Function Documentation	67
8.53.2.1	create	67
8.54	Options Struct Reference	67
8.54.1	Detailed Description	67
8.54.2	Member Function Documentation	68
8.54.2.1	isAdjustable	68
8.54.2.2	load	68
8.54.2.3	options	69
8.54.2.4	reinitialise	69
8.54.2.5	save	69
8.54.2.6	setAdjustable	69
8.54.2.7	setDefault	70
8.55	src.orders.Order Class Reference	70
8.55.1	Detailed Description	70
8.55.2	Member Function Documentation	71
8.55.2.1	fromBytes	71

8.55.2.2	load	71
8.55.2.3	toBytes	71
8.56	src.orders.OrderDispatcher Class Reference	71
8.56.1	Detailed Description	71
8.56.2	Member Function Documentation	71
8.56.2.1	treat	71
8.57	ParamItemDelegate Class Reference	72
8.58	src.tools.Perf Class Reference	72
8.58.1	Detailed Description	72
8.58.2	Member Function Documentation	72
8.58.2.1	show	72
8.58.2.2	tic	73
8.58.2.3	toc	73
8.59	PtCoords Class Reference	73
8.59.1	Detailed Description	73
8.60	PxCoords Class Reference	73
8.60.1	Detailed Description	74
8.61	RlCoords Class Reference	74
8.61.1	Detailed Description	74
8.62	src.cache.ScaledCache Class Reference	75
8.63	SelectionDock Class Reference	75
8.64	src.server.Server Class Reference	76
8.64.1	Detailed Description	76
8.65	src.network.ServerConnection Class Reference	76
8.65.1	Detailed Description	77
8.65.2	Member Function Documentation	77
8.65.2.1	run	77
8.66	TabAcces Class Reference	77
8.67	TabBar Class Reference	77
8.68	src.tools.Timer Class Reference	78
8.68.1	Detailed Description	78
8.68.2	Member Function Documentation	78
8.68.2.1	add	78
8.69	src.utils.WalkableGraph Class Reference	79

8.70	Welcome Class Reference	79
8.71	World Class Reference	79
8.71.1	Detailed Description	80
8.72	src.world.World Class Reference	80
8.73	WorldEditor Class Reference	80
8.74	src.printWorld.WorldViewer Class Reference	81
8.74.1	Constructor & Destructor Documentation	81
8.74.1.1	__init__	81
8.74.2	Member Function Documentation	81
8.74.2.1	end	81
8.74.2.2	get_event	82
8.74.2.3	move	82
8.74.2.4	move_char	82
8.74.2.5	propagate_trigger	82
8.74.2.6	render	82
8.74.2.7	update	82
8.75	XmlHandler Class Reference	82
9	File Documentation	83
9.1	src/editor/Game/game.h File Reference	83
9.1.1	Detailed Description	83
9.2	src/editor/Game/map.h File Reference	83
9.2.1	Detailed Description	84
9.2.2	Define Documentation	84
9.2.2.1	forCells	84
9.3	src/editor/Game/mappainter.h File Reference	84
9.3.1	Detailed Description	85
9.3.2	Function Documentation	85
9.3.2.1	operator^	85
9.4	src/editor/Game/mapslistmodel.h File Reference	85
9.4.1	Detailed Description	86
9.5	src/editor/Game/object.h File Reference	86
9.5.1	Detailed Description	87
9.5.2	Define Documentation	88

9.5.2.1	Attr	88
9.5.2.2	AttrDef	89
9.5.2.3	AttrGetter	89
9.5.2.4	AttrSetter	90
9.5.2.5	AttrT	90
9.5.2.6	C	90
9.5.2.7	C0	91
9.5.2.8	C1	91
9.5.2.9	Flag	92
9.5.2.10	FlagGetter	92
9.5.2.11	FlagSetter	92
9.5.2.12	ObjectsMap	93
9.5.2.13	ObjectsMapC	93
9.5.2.14	Param	93
9.5.2.15	ParamGetter	94
9.5.2.16	ParamSetter	94
9.5.2.17	SetFlag	94
9.5.2.18	SetParam	95
9.6	src/editor/Game/xmlhandler.h File Reference	95
9.6.1	Detailed Description	96
9.7	src/editor/GUI/options.h File Reference	96
9.7.1	Detailed Description	97
9.7.2	Define Documentation	97
9.7.2.1	Default	97
9.7.2.2	DefaultF	97
9.7.2.3	DIR	97
9.7.2.4	MAP	97
9.7.2.5	WIN	97
9.8	src/editor/GUI/Tabs/bcolor.h File Reference	97
9.8.1	Detailed Description	98
9.9	src/editor/GUI/Tabs/Docks/bdock.h File Reference	98
9.9.1	Detailed Description	98

Chapter 1

Todo List

Class `GameObject`

Chapter 2

Deprecated List

Member [ObjectsMap](#) (pref, ini, Ini, body, sg, pl)

Member [ObjectsMapC](#) (name, names, Type, Types, pref, arg)

Chapter 3

Namespace Index

3.1 Namespace List

Here is a list of all documented namespaces with brief descriptions:

[src::parsing::map_parser](#) 15

Chapter 4

Class Index

4.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

src.path.Archi	17
src.backgroundLayer.BackgroundLayer	18
src.world.BaseObject	19
BColor	20
BDock	23
BDocksZone	24
BDockWidget	25
CellDock	29
CellTypesDock	30
MapDock	48
SelectionDock	75
BinaryStateMachine	26
BLayout	27
src.world.Cell	27
CellTypeListModel	30
src.cursescli.CellViewer	31
src.character.Character	31
src.chunk.Chunk	32
CICoords	33
src.client.Client	34
src.cursescli.Curses	35
Editor	35
src.world.Entity	36
GameObject	37
Cell	28
CellType	29
Game	36
Image	43
Map	47

Object	65
World	79
src.cache.GlobalCache	42
src.cache.ScaledCache	75
src.cache.ChunkCache	33
src.cache.ImageCache	44
src.interactions.Interaction	44
src.printWorld.Interface	45
src.printWorld.WorldViewer	81
src.interface.Interface	45
Intertie	46
src.layer.Layer	47
src.world.Map	48
MapPainter	49
MapsEditor	57
MapsListModel	57
src.map.MapViewer	58
src.cursescli.MapViewer	59
MapView	59
src.network.NetworkClient	61
src.networkudp.NetworkClient	62
src.network.NetworkServer	62
src.networkudp.NetworkServer	64
NewGame	64
ObjectEditor	65
ObjectFlagTableModel	65
ObjectParamTableModel	66
src.world.ObjectType	66
Options	67
src.orders.Order	70
src.orders.OrderDispatcher	71
ParamItemDelegate	72
src.tools.Perf	72
PtCoords	73
PxCoords	73
RlCoords	74
src.server.Server	76
src.network.ServerConnection	76
TabAcces	77
TabBar	77
src.tools.Timer	78
src.utils.WalkableGraph	79
Welcome	79
src.world.World	80
WorldEditor	80
XmlHandler	82

Chapter 5

Class Index

5.1 Class List

Here are the classes, structs, unions and interfaces with brief descriptions:

src.path.Archi	17
src.backgroundLayer.BackgroundLayer	18
src.world.BaseObject	19
BColor	
Simple frame that offers color selection	20
BDock	
Container for widget to display in a BDocksZone	23
BDocksZone	24
BDockWidget	
Base class for game-related docks	25
BinaryStateMachine	
Simple QStateMachine with two states	26
BLayout	27
src.world.Cell	27
Cell	
The Cell class	28
CellDock	29
CellType	
The CellType class	29
CellTypeListModel	
The CellTypeListModel class	30
CellTypesDock	30
src.cursescli.CellViewer	31
src.character.Character	31
src.chunk.Chunk	32
src.cache.ChunkCache	33
CICoords	
Describe positions with cell coordinates	33
src.client.Client	34

src.cursescli.Curses	35
Editor	
Main window of the Editor	35
src.world.Entity	36
Game	
Gather the differents parts needed to describe a game	36
GameObject	
Base class for every part of games	37
src.cache.GlobalCache	42
Image	
Stores an external file in a QImage, and gives each image ressources a unique identifier	43
src.cache.ImageCache	44
src.interactions.Interaction	44
src.printWorld.Interface	45
src.interface.Interface	45
Intertie	
Provide int that move smoothly from their value to an objective	46
src.layer.Layer	47
Map	
The Map class	47
src.world.Map	48
MapDock	48
MapPainter	
That can paint a Map using a QPainter	49
MapsEditor	
Tab offering map editing facilities	57
MapsListModel	
Presentation class for the Qt Model-View framework	57
src.map.MapViewer	58
src.cursescli.MapViewer	59
MapViewer	
Widget to display and edit a Map using a MapPainter	59
src.network.NetworkClient	61
src.networkudp.NetworkClient	62
src.network.NetworkServer	62
src.networkudp.NetworkServer	64
NewGame	64
Object	
The Object class	65
ObjectEditor	65
ObjectFlagTableModel	65
ObjectParamTableModel	66
src.world.ObjectType	66
Options	
Session-independant options and preferences	67
src.orders.Order	70
src.orders.OrderDispatcher	71
ParamItemDelegate	72
src.tools.Perf	72

PtCoords	
Describe positions with virtual point coordinates	73
PxCoords	
Describe positions with real pixel coordinates	73
RlCoords	
Describe positions with relative coordinates	74
src.cache.ScaledCache	75
SelectionDock	75
src.server.Server	76
src.network.ServerConnection	76
TabAcces	77
TabBar	77
src.tools.Timer	78
src.utils.WalkableGraph	79
Welcome	79
World	
The World class	79
src.world.World	80
WorldEditor	80
src.printWorld.WorldViewer	81
XmlHandler	82

Chapter 6

File Index

6.1 File List

Here is a list of all documented files with brief descriptions:

src/editor/Game/ game.h	
Definition of the Game and World classes	83
src/editor/Game/ map.h	
Definition of the Map , Cell and CellType classes	83
src/editor/Game/ mappainter.h	
Definition of the MapPainter class and other related classes to render maps	84
src/editor/Game/ mapslistmodel.h	
Definition of Model/View presentation classes	85
src/editor/Game/ object.h	
Definition of the base class GameObject , and some inherited classes	86
src/editor/Game/ xmlhandler.h	
Definition of the XmlHandler class and other related classes to read XML game's files	95
src/editor/GUI/ editor.h	??
src/editor/GUI/ newgame.h	??
src/editor/GUI/ options.h	
Definition of the Options class, and the constants that are used in this class	96
src/editor/GUI/ tabacces.h	??
src/editor/GUI/ tabbar.h	??
src/editor/GUI/Tabs/ bcolor.h	
Definition of the BColor class	97
src/editor/GUI/Tabs/ celldock.h	??
src/editor/GUI/Tabs/ celltypesdock.h	??
src/editor/GUI/Tabs/ mapdock.h	??
src/editor/GUI/Tabs/ mapseditor.h	??
src/editor/GUI/Tabs/ mapviewer.h	??
src/editor/GUI/Tabs/ objecteditor.h	??

src/editor/GUI/Tabs/ selectiondock.h	??
src/editor/GUI/Tabs/ welcome.h	??
src/editor/GUI/Tabs/ worldeditor.h	??
src/editor/GUI/Tabs/Docks/ bdock.h	
Definition of the BDock class	98
src/editor/GUI/Tabs/Docks/ bdockszone.h	??
src/editor/GUI/Tabs/Docks/ bdockwidget.h	??
src/editor/GUI/Tabs/Docks/ intertie.h	??

Chapter 7

Namespace Documentation

7.1 `src::parsing::map_parser` Namespace Reference

Functions

- def [parse_cell](#)
- def [map_parser](#)
- def [get_size](#)
- def **gen_map**

7.1.1 Detailed Description

This module handles xml parsing for maps description files.

7.1.2 Function Documentation

7.1.2.1 `def src.parsing.map_parser.get_size (tree)`

Gets the size of the map.

7.1.2.2 `def src.parsing.map_parser.map_parser (map_xml)`

The main parser for the map xml file.

7.1.2.3 `def src.parsing.map_parser.parse_cell (cell_object)`

Parses a CellType attribute.

Chapter 8

Class Documentation

8.1 src.path.Archi Class Reference

Public Member Functions

- def `__init__`
- def `get_src_file`
- def `get_static_file`
- def `get_xml_file`
- def `list_files`
- def `get_src_dir`
- def `get_static_dir`
- def `get_xml_dir`

Public Attributes

- `main_directory`

8.1.1 Detailed Description

This class manages the architecture of the project.
It allows the user to travel in the file system of the game, to get the XML files and others (PNG, configuration files...)
Moreover, it should be cross-platform compliant

8.1.2 Member Function Documentation

8.1.2.1 `def src.path.Archi.get_src_dir (self, dir_path)`

Gets the given `dir_path` with respect to the `src` folder.

8.1.2.2 `def src.path.Archi.get_src_file (self, file_path, mode = 'r')`

Gets the path of the src directory.
At least used by the src scripts.

8.1.2.3 `def src.path.Archi.get_static_dir (self, dir_path)`

Gets the given dir_path with respect to the static folder.

8.1.2.4 `def src.path.Archi.get_static_file (self, file_path, mode = 'r')`

Gets the path of the static files directory. Static files are basically all graphical files, and a description of the common world

8.1.2.5 `def src.path.Archi.get_xml_dir (self, dir_path)`

Gets the given dir_path with respect to the xml folder.

8.1.2.6 `def src.path.Archi.get_xml_file (self, file_path, mode = 'r')`

Gets the path of a xml file describing a world, a scenario, or a campaign.

8.1.2.7 `def src.path.Archi.list_files (self, dir_path)`

List all the files present in the dir_path, if it is a dir.
Else raise a FileNotFoundError.

The documentation for this class was generated from the following file:

- src/path.py

8.2 src.backgroundLayer.BackgroundLayer Class Reference

Inherits Layer.

Public Member Functions

- `def __init__`
- `def init_layer`
- `def render`

- def **collision_test**
- def **click_update**
- def **get_grid_info**
- def **zoom**

Public Attributes

- **cell_ids**
- **grid_cell_ids**
- **g_width**
- **g_height**
- **image**
- **rect**
- **mouse_iso**
- **selected_cell**

The documentation for this class was generated from the following file:

- src/backgroundLayer.py

8.3 src.world.BaseObject Class Reference

Public Member Functions

- def **__init__**
- def **__getattr__**
- def **__setattr__**
- def [load](#)
- def [contextEval](#)

Public Attributes

- **params**
- **ident**
- **conditions**

Static Public Attributes

- int **ident** = 0
- dictionary **ids** = {}

8.3.1 Detailed Description

Tout objet du monde

8.3.2 Member Function Documentation

8.3.2.1 `def src.world.BaseObject.contextEval (self, value)`

Évalue une expression dans le contexte de l'objet pour les ordres

8.3.2.2 `def src.world.BaseObject.load (self, data)`

Charge l'objet depuis une structure Xml

The documentation for this class was generated from the following file:

- `src/world.py`

8.4 BColor Class Reference

The `BColor` class is a simple frame that offers color selection.

```
#include <bcolor.h>
```

Public Slots

- void `setColor` (const QColor &c)
- void `setColorQuiet` (const QColor &c)
- void `setName` (const QString &s)
- void `setNameQuiet` (const QString &s)

Signals

- void `colorChanged` (const QColor &)
- void `nameChanged` (const QString &)

Public Member Functions

- `BColor` (QWidget *parent=0)
- `BColor` (QColor c, QWidget *parent=0)
- const QString & `name` () const
- const QColor & `color` () const

Properties

- QColor `color`
- QString `name`

8.4.1 Detailed Description

The [BColor](#) class is a simple frame that offers color selection.

8.4.2 Constructor & Destructor Documentation

8.4.2.1 `BColor::BColor (QWidget * parent = 0) [explicit]`

Constructs a new [BColor](#) object, with white as current color.

8.4.2.2 `BColor::BColor (QColor c, QWidget * parent = 0) [explicit]`

Constructs a new [BColor](#) object and sets the color to *c*.

8.4.3 Member Function Documentation

8.4.3.1 `const QColor& BColor::color () const`

Returns the current color of the selector.

See also

[setColor](#), [setColorQuiet](#), [colorChanged](#)

8.4.3.2 `void BColor::colorChanged (const QColor &) [signal]`

This signal is emitted when the color change, both when the user edit it or when [setColor](#) is called.

See also

[color](#), [setColorQuiet](#)

8.4.3.3 `const QString& BColor::name () const`

Returns the name of the selector.

See also

[setName](#), [setNameQuiet](#), [nameChanged](#)

8.4.3.4 void BColor::nameChanged (const QString &) [signal]

This signal is emitted when the name change, when [setColor](#) is called.

See also

[name](#), [setNameQuiet](#)

8.4.3.5 void BColor::setColor (const QColor & c) [slot]

Sets the current color.

The signal [colorChanged](#) is emitted.

See also

[setColorQuiet](#), [color](#)

8.4.3.6 void BColor::setColorQuiet (const QColor & c) [slot]

Sets the current color.

The signal [colorChanged](#) is not emitted.

See also

[setColor](#), [color](#)

8.4.3.7 void BColor::setName (const QString & s) [slot]

Sets the name of the selector.

The signal [nameChanged](#) is emitted.

See also

[setNameQuiet](#), [name](#)

8.4.3.8 void BColor::setNameQuiet (const QString & s) [slot]

Sets the name of the selector.

The signal [nameChanged](#) is not emitted.

See also

[setName](#), [name](#)

8.4.4 Property Documentation

8.4.4.1 `const QColor & BColor::color` [read, write]

The current color that is displayed by the widget

See also

[setColor](#), [setColorQuiet](#), [colorChanged](#).

8.4.4.2 `const QString & BColor::name` [read, write]

The name that is shown as title for the color chooser dialog used for user color definition purpose.

see also [setName](#), [setNameQuiet](#), and [nameChanged](#).

The documentation for this class was generated from the following files:

- `src/editor/GUI/Tabs/bcolor.h`
- `src/editor/GUI/Tabs/bcolor.cpp`

8.5 BDock Class Reference

The [BDock](#) class is the container for widget to display in a [BDocksZone](#).

```
#include <bdock.h>
```

Public Slots

- void **setTitle** (QString s)
- void **setUnfold** (bool v)

Signals

- void **mouseClick** (int i, const QPoint &p)
- void **mouseMove** (int i, const QPoint &p)
- void **mouseRelease** (int i, const QPoint &p)
- void **movementFinished** (int i)

Public Member Functions

- **BDock** (QString title, [BDockWidget](#) *dock, QWidget *parent=0)
- bool **unfold** () const
- int **currentSize** () const

- void **setCurrentSize** (int t)
- void **setIndex** (int i)
- int **index** () const
- void **moveTo** (int i, bool inert=true)
- void **setLength** (int l)

Properties

- bool **unfold**
- int **currentSize**

8.5.1 Detailed Description

The [BDock](#) class is the container for widget to display in a [BDocksZone](#).

A [BDock](#) is composed of a title and a QScrollArea in which a [BDockWidget](#) is displayed.

This container is movable within the [BDocksZone](#) it belongs to, and it can be hide.

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/Docks/[bdock.h](#)
- src/editor/GUI/Tabs/Docks/[bdock.cpp](#)

8.6 BDocksZone Class Reference

Public Types

- enum [ScrollBarMode](#) { [AlwaysVisible](#), [Adjustable](#), [Fixed](#) }

The ScrollBarMode enum describe the way the [BDocksZone](#) reacts when a scroll bar is needed.

Public Slots

- void **swap** (bool anim=true)

Public Member Functions

- **BDocksZone** (QWidget *parent=0)
- void **setUnfold** (bool u, bool anim=true)
- const [BinaryStateMachine](#) * **states** () const
- int **length** () const
- void **setLength** (int t)
- [ScrollBarMode](#) **scrollBarMode** () const
- void **setScrollBarMode** ([ScrollBarMode](#) m)

- int **currentLength** () const
- void **addDock** (QString title, [BDockWidget](#) *dock)

Protected Slots

- void **setCurrentLength** (int t)

Properties

- int **length**
- int **currentLength**

8.6.1 Member Enumeration Documentation

8.6.1.1 enum BDocksZone::ScrollBarMode

The ScrollBarMode enum describe the way the [BDocksZone](#) reacts when a scroll bar is needed.

Enumerator:

AlwaysVisible Always show the scroll bar, even if it is useless

Adjustable Show the scroll bar when needed, adaptating the docks length

Fixed Show the scroll bar when needed, keeping the docks length fixed

The documentation for this class was generated from the following files:


- src/editor/GUI/Tabs/Docks/bdockszone.h
- src/editor/GUI/Tabs/Docks/bdockszone.cpp

8.7 BDockWidget Class Reference

The [BDockWidget](#) class is the base class for game-related docks.

```
#include <bdockwidget.h>
```

Inheritance diagram for BDockWidget:



Public Slots

- virtual void **updateGame** ()

Signals

- void **gameModified** ()
- void **changeDockName** (QString)

Public Member Functions

- **BDockWidget** (QWidget *parent=0)
- void **setGame** (Game *g)

Protected Attributes

- Game * **game**

8.7.1 Detailed Description

The [BDockWidget](#) class is the base class for game-related docks.

It provides common functions for set game, update, ...

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/Docks/bdockwidget.h
- src/editor/GUI/Tabs/Docks/bdockwidget.cpp

8.8 BinaryStateMachine Class Reference

The [BinaryStateMachine](#) class is a simple QStateMachine with two states.

```
#include <intertie.h>
```

Public Slots

- void **swap** ()
- void **setPositive** (bool p)
- void **setNegative** (bool n)

Signals

- void **swapped** (bool)
- void **__swap** ()

Public Member Functions

- **BinaryStateMachine** (QObject *parent=0)
- void **defineProperty** (QObject *obj, const char *prop)
- void **defineProperty** (QObject *obj, const char *prop, QVariant yesValue, QVariant noValue)
- bool **isPositive** () const
- bool **isNegative** () const

8.8.1 Detailed Description

The [BinaryStateMachine](#) class is a simple QStateMachine with two states.

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/Docks/intertie.h
- src/editor/GUI/Tabs/Docks/intertie.cpp

8.9 BLayout Class Reference

Signals

- void **sizeChanged** (int)
- void **showPoint** (int, int)

Public Member Functions

- **BLayout** (QWidget *parent=0)
- void **setOrientation** (Qt::Orientation o)
- void **insert** ([BDock](#) *d, int ind=-1)
- void **setSpacing** (int e)
- void **setLength** (int t)
- int **spacing** () const

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/Docks/bdockszone.h
- src/editor/GUI/Tabs/Docks/bdockszone.cpp

8.10 src.world.Cell Class Reference

Public Member Functions

- def **__init__**

Public Attributes

- **entities**
- **objects**

The documentation for this class was generated from the following file:


- src/world.py

8.11 Cell Class Reference

The [Cell](#) class.

```
#include <map.h>
```

Inheritance diagram for Cell:



Public Member Functions

- **Cell** ([Game](#) *g=nullptr, [GameObject](#) *parent=nullptr)
- bool **isSelected** () const
- void **setSelected** (bool s=true)
- void **invertSelected** ()
- void **addSelection** ()
- bool **isPreSelected** () const
- void **confirmPreSelection** (bool add=true)
- void **clearPreSelection** ()

Public Attributes

- ObjectListD(o, O, bject,, s, [Object](#)) private int **nbSel**
- bool **selectMod**

8.11.1 Detailed Description


The [Cell](#) class.

The documentation for this class was generated from the following files:

- src/editor/Game/[map.h](#)
- src/editor/Game/map.cpp

8.12 CellDock Class Reference

Inheritance diagram for CellDock:



Public Slots

- void **updateGame** ()
- void **selectionChanged** ()

Public Member Functions

- **CellDock** (QWidget *parent=0)

The documentation for this class was generated from the following files:


- src/editor/GUI/Tabs/celldock.h
- src/editor/GUI/Tabs/celldock.cpp

8.13 CellType Class Reference

The [CellType](#) class.

```
#include <map.h>
```

Inheritance diagram for CellType:



Public Member Functions

- **CellType** ([Game](#) *g, [GameObject](#) *parent)

8.13.1 Detailed Description

The [CellType](#) class.

The documentation for this class was generated from the following files:

- [src/editor/Game/map.h](#)
- [src/editor/Game/map.cpp](#)

8.14 CellTypeListModel Class Reference

The [CellTypeListModel](#) class.

```
#include <mapslistmodel.h>
```

Public Member Functions

- **CellTypeListModel** ([World](#) *w, QObject *parent=0)
- int **rowCount** (const QModelIndex &parent) const Q_DECL_OVERRIDE
- QVariant **data** (const QModelIndex &index, int role) const Q_DECL_OVERRIDE
- bool **insertRows** (int row, int count, const QModelIndex &parent) Q_DECL_OVERRIDE
- bool **removeRows** (int row, int count, const QModelIndex &parent) Q_DECL_OVERRIDE

8.14.1 Detailed Description


The [CellTypeListModel](#) class.

The documentation for this class was generated from the following files:

- [src/editor/Game/mapslistmodel.h](#)
- [src/editor/Game/mapslistmodel.cpp](#)

8.15 CellTypesDock Class Reference

Inheritance diagram for CellTypesDock:



Public Member Functions

- **CellTypesDock** (QWidget *parent=0)
- void **updateGame** ()

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/celltypesdock.h
- src/editor/GUI/Tabs/celltypesdock.cpp

8.16 src.cursescli.CellViewer Class Reference

Public Member Functions

- def **__init__**
- def **display**

Public Attributes

- **cell**

The documentation for this class was generated from the following file:

- src/cursescli.py

8.17 src.character.Character Class Reference

Public Member Functions

- def **__init__**
- def **render**
- def **update**
- def **update_skin**
- def **zoom**
- def **set_path**
- def **make_skin**
- def **get_cell_pos_by_index**
- def **move**

Public Attributes

- **skin**
- **name**
- **action**
- **scale**
- **orientation**
- **image**
- **current_image**
- **game_frame_count**
- **anim_frame_count**
- **current_cell**
- **path**
- **pos_offset**

The documentation for this class was generated from the following file:

- `src/character.py`

8.18 `src.chunk.Chunk` Class Reference

Public Member Functions

- `def __init__`
- `def init_chunk`
- `def render`
- `def scale_chunk`
- `def update`
- `def click_trigger`
- `def set_state`
- `def get_state`

Public Attributes


- **index**
- **cells**
- **g_width**
- **g_height**
- **scale**
- **width**
- **height**
- **pos**
- **rect**
- **layers**
- **image**

The documentation for this class was generated from the following file:

- src/chunk.py

8.19 src.cache.ChunkCache Class Reference

Inheritance diagram for src.cache.ChunkCache:



Public Member Functions

- def **init_chunk**
- def **init_elts**
- def **init_chunks**
- def **get_chunk**
- def **add_scaled**

Static Public Attributes

- dictionary **cache** = {}

The documentation for this class was generated from the following file:

- src/cache.py

8.20 CICoords Class Reference

The [CICoords](#) class describe positions with cell coordinates.

```
#include <mappainter.h>
```

Public Member Functions

- **CICoords** (qreal x, qreal y)
- **CICoords** (const QPointF &p)

8.20.1 Detailed Description

The [CICoords](#) class describe positions with cell coordinates.

Theses coordinates describe each point relatively to the cell grid. They correspond to the isometric 3D world.

See also

[RICoords](#), [PtCoords](#), [PxCoords](#)

The documentation for this class was generated from the following file:

- [src/editor/Game/mappainter.h](#)

8.21 src.client.Client Class Reference

Public Member Functions

- def [__init__](#)
- def [__del__](#)
- def **run**
- def **getEntity**
- def **main**
- def **handleOrder**

Public Attributes

- **loop**
- **net**
- **world**
- **interface**
- **interactions**
- **perso**
- **orderDispatcher**
- **netTask**

8.21.1 Detailed Description

Main class of the client process, gathering interface, world and networking

8.21.2 Constructor & Destructor Documentation

8.21.2.1 def src.client.Client.__del__(self)

Kill network and interface

The documentation for this class was generated from the following file:

- src/client.py

8.22 src.cursescli.Curses Class Reference

Inherits Interface.

Public Member Functions

- def **__init__**
- def **repaint**
- def **end**
- def **getEvent**

Public Attributes

- **win**
- **mv**

8.22.1 Detailed Description

ncurses-based UI

The documentation for this class was generated from the following file:

- src/cursescli.py

8.23 Editor Class Reference

The [Editor](#) class is the main window of the [Editor](#).

```
#include <editor.h>
```

Public Member Functions

- **Editor** (QStringList args, QWidget *parent=0)

8.23.1 Detailed Description

The [Editor](#) class is the main window of the [Editor](#).

It is composed of tabs that offer editing facilities.

The documentation for this class was generated from the following files:

- `src/editor/GUI/editor.h`
- `src/editor/GUI/editor.cpp`

8.24 `src.world.Entity` Class Reference

Public Member Functions

- `def __init__`

Public Attributes

- `quests`
- `inventory`
- `user`

The documentation for this class was generated from the following file:


- `src/world.py`

8.25 `Game` Class Reference

The [Game](#) class gather the differents parts needed to describe a game.

```
#include <game.h>
```

Inheritance diagram for `Game`:



Public Member Functions

- `int newIdent ()`
- `World * world ()`

- [Map](#) * **currentMap** ()
- void **setCurrentMap** ([Map](#) *m)
- void **addImage** ([Image](#) *im)

8.25.1 Detailed Description

The [Game](#) class gather the differents parts needed to describe a game.

It contains mainly the [World](#), and the ressources used by it (images and strings)

For editing purposes, it contains also the active map (the one being editing)

8.25.2 Member Function Documentation

8.25.2.1 int **Game::newIdent** () [inline]

Returns a new unused identifiers

Note

It should only be used by [GameObject](#) methods [GameObject::init](#) and [GameObject::GameObject](#).

The documentation for this class was generated from the following files:


- src/editor/Game/[game.h](#)
- src/editor/Game/game.cpp

8.26 GameObject Class Reference

The [GameObject](#) class is the base class for every part of games.

```
#include <object.h>
```

Inheritance diagram for [GameObject](#):



Public Member Functions

- [GameObject](#) ([Game](#) *g=nullptr, [GameObject](#) *parent=nullptr)
- void **init** ([Game](#) *g, [GameObject](#) *p)
- virtual bool **isValid** () const

- int **ident** () const
- const QDateTime & **lastInternalEdition** () const
- const QDateTime & **lastChildrenEdition** () const
- const QDateTime & **lastEdition** () const
- int **getParam** (const QString &p) const
- void **setParam** (const QString &p, int v)
- bool **hasParam** (const QString &p) const
- QList< QString > **params** () const
- bool **getFlag** (const QString &f) const
- void **setFlag** (const QString &f, bool v)
- bool **hasFlag** (const QString &f) const
- QList< QString > **flags** () const
- void **touch** ()
- void **addReference** ()
- void **removeReference** ()
- void **setParent** (GameObject *p)

Protected Member Functions

- void **addChild** (GameObject *c)
- void **removeChild** (GameObject *c)
- void **childrenTouched** (const QDateTime &d)

Protected Attributes

- GameObject * **parent**
- QMap< int, GameObject * > **children**
- Game * **game**
- int **id**
- int **nbRef**
- QMap< QString, int > **aParams**
- QMap< QString, bool > **aFlags**
- QString **fileName**
- QDateTime **lastEdit**
- QDateTime **lastChildEdit**

8.26.1 Detailed Description

The **GameObject** class is the base class for every part of games.

Each instance is identified by a game-wide unique identifier.

Object edition notification mechanism

To make the edition easier, each **GameObject** contains two QDateTime values :

- The most recent edition time, which is updated by the **touch** method

- The most recent child edition time, also updated by the [touch](#) method

Note

If the changes that are made in the object have to be detected by display/edition widgets, the [touch](#) function should be called.

To prevent the notification chain to be broken, the existing objects should always have a parent (except for the root object). This can be achieved using the [init](#) or [setParent](#) method, when the parent have not been given in the constructor. (see [object.h](#) for details)

References count

Todo**8.26.2 Constructor & Destructor Documentation**

8.26.2.1 `GameObject::GameObject (Game * g = nullptr, GameObject * parent = nullptr)`

Constructs a new [GameObject](#) with parent `parent` and the reference to the game `g`.

Note

If these objects cannot be given to the constructor (case of an array of objects), the [init](#) method must be called after the creation to make the [GameObject](#) valid.

8.26.3 Member Function Documentation

8.26.3.1 `QList<QString> GameObject::flags () const [inline]`

Returns the list of the registered flags

See also

[getFlag](#), [setFlag](#), [params](#)

8.26.3.2 `bool GameObject::getFlag (const QString & f) const [inline]`

Returns the value of the `f` flag.

Note

If the requested parameter does not exists, a `false` value is returned, and the flags map stay unchanged

See also

[flags](#), [hasFlag](#), [setFlag](#), [getParam](#)

8.26.3.3 `int GameObject::getParam (const QString & p) const` `[inline]`

Returns the value of the `p` parameter.

Note

If the requested parameter does not exists, a null value is returned, and the parameters map stay unchanged

See also

[params](#), [hasParam](#), [setParam](#), [getFlag](#)

8.26.3.4 `bool GameObject::hasFlag (const QString & f) const` `[inline]`

Returns true if the flag `f` is register in the object's flags.

See also

[getFlag](#), [setFlag](#), [hasParam](#)

8.26.3.5 `bool GameObject::hasParam (const QString & p) const` `[inline]`

Returns true if the parameter `is` register in the object's parameters.

See also

[getParam](#), [setParam](#), [hasFlag](#)

8.26.3.6 `int GameObject::ident () const` `[inline]`

Returns the name wide unique identifier of the object.

See also

[init](#), [GameObject](#)

8.26.3.7 `void GameObject::init (Game * g, GameObject * p)`

Initialises the object in case it had been construct with a NULL pointer (array of objects)

See also

[isValid](#), [GameObject](#)

8.26.3.8 `virtual bool GameObject::isValid () const` `[inline, virtual]`

Returns true if the object has been initialised

See also

[init](#), [GameObject](#)

Reimplemented in [Image](#).

8.26.3.9 `const QDateTime& GameObject::lastChildrenEdition () const` `[inline]`

Returns the last time one of the object's children has been modified.

See also

[lastEdition](#), [lastInternalEdition](#)

8.26.3.10 `const QDateTime& GameObject::lastEdition () const` `[inline]`

Returns the last time a modification was made on the object or one of its children.

See also

[lastInternalEdition](#), [lastChildrenEdition](#)

8.26.3.11 `const QDateTime& GameObject::lastInternalEdition () const` `[inline]`

Returns the last edition time.

See also

[lastEdition](#), [lastChildrenEdition](#)

8.26.3.12 `QList<QString> GameObject::params () const` `[inline]`

Returns the list of the registered paramters

See also

[getParam](#), [setParam](#), [flags](#)

8.26.3.13 void GameObject::setFlag (const QString & *f*, bool *v*) [inline]

Set the value of the *f* flag.

Note

If the requested flag does not exists, it is created.

See also

[flags](#), [hasFlag](#), [getFlag](#), [setParam](#)

8.26.3.14 void GameObject::setParam (const QString & *p*, int *v*) [inline]

Set the value of the *p* parameter.

Note

If the requested parameter does not exists, it is created.

See also

[params](#), [hasParam](#), [getParam](#), [setFlag](#)

8.26.3.15 void GameObject::touch ()

Notify the object and its parent that it has been modified.

See also


[lastInternalEdition](#), [lastChildrenEdition](#), [lastEdition](#).

The documentation for this class was generated from the following files:

- [src/editor/Game/object.h](#)
- [src/editor/Game/object.cpp](#)

8.27 src.cache.GlobalCache Class Reference

Inheritance diagram for src.cache.GlobalCache:

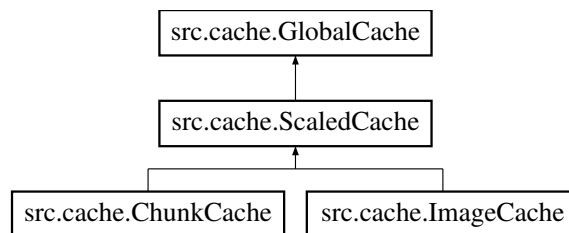

Public Member Functions

- def **__init__**
- def **set**
- def **get**
- def **clear**
- def **keys**
- def **show**

The documentation for this class was generated from the following file:


- src/cache.py

8.28 Image Class Reference

The [Image](#) class stores an external file in a QImage, and gives each image resources a unique identifier.

```
#include <object.h>
```

Inheritance diagram for Image:



Public Member Functions

- **Image** ([Game](#) *g, [GameObject](#) *parent, const QString &fileName)
- bool **isValid** () const
- const QImage & **image** () const
- const QSize **size** () const
- void **update** ()

8.28.1 Detailed Description

The [Image](#) class stores an external file in a QImage, and gives each image resources a unique identifier.

8.28.2 Member Function Documentation

8.28.2.1 bool **Image::isValid** () const `[inline, virtual]`

Returns true if the object has been initialised

See also

[init](#), [GameObject](#)


Reimplemented from [GameObject](#).

The documentation for this class was generated from the following files:

- [src/editor/Game/object.h](#)
- [src/editor/Game/object.cpp](#)

8.29 src.cache.ImageCache Class Reference

Inheritance diagram for `src.cache.ImageCache`:



Public Member Functions

- def **init_image_from_file**
- def **init_image_from_surface**
- def **get_image**
- def **init_elts**
- def **init_images**
- def **add_scaled**

Static Public Attributes

- dictionary **cache** = {}

The documentation for this class was generated from the following file:

- [src/cache.py](#)

8.30 src.interactions.Interaction Class Reference

Public Member Functions

- def **__init__**
- def **load**

Public Attributes

- **target**
- **type**
- **key**
- **event**

8.30.1 Detailed Description


Représente une connection entre une entrée utilisateur
et un événement à déclencher sur une cible

The documentation for this class was generated from the following file:

- src/interactions.py

8.31 src.printWorld.Interface Class Reference

Inheritance diagram for src.printWorld.Interface:



The documentation for this class was generated from the following file:

- src/printWorld.py

8.32 src.interface.Interface Class Reference

Public Member Functions

- def **__init__**
- def **update**
- def **repaint**
- def **end**
- def **getEvent**

Public Attributes

- **world**
- **lastUpdate**

8.32.1 Detailed Description

UI base-class, can be used as a dummy interface

The documentation for this class was generated from the following file:

- src/interface.py

8.33 Intertie Class Reference

The [Intertie](#) class provide int that move smoothly from their value to an objective.

```
#include <intertie.h>
```

Public Slots

- void **setValue** (int v, bool inert=true)
- void **setMaximumSpeed** (int vM)
- void **setAcceleration** (int a)
- void **setUpdateInterval** (int d)

Signals

- void **modificationFinished** (int)
- void **valueChanged** (int)

Public Member Functions

- **Intertie** (QObject *parent=0)
- int **value** () const
- void **link** (QObject *obj, const char *prop)

8.33.1 Detailed Description

The [Intertie](#) class provide int that move smoothly from their value to an objective.

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/Docks/intertie.h
- src/editor/GUI/Tabs/Docks/intertie.cpp

8.34 src.layer.Layer Class Reference

Public Member Functions

- def **__init__**
- def **render**
- def **update**
- def **get_cell_pos**
- def **make_grid**
- def **update_cell**
- def **update_grid**
- def **zoom**

Public Attributes

- **cells**
- **scale**
- **g_width**
- **g_height**
- **size**

The documentation for this class was generated from the following file:


- src/layer.py

8.35 Map Class Reference

The [Map](#) class.

```
#include <map.h>
```

Inheritance diagram for Map:



Public Member Functions

- **Map** ([Game](#) *g, [GameObject](#) *parent)
- **ParamGetter** (width) ParamGetter(height) QSize size() const
- void **setWidth** (int w)
- void **setHeight** (int h)

- void **resize** (int w, int h)
- [Cell](#) & **cell** (int i, int j) const
- [Cell](#) & **cell** (const QPoint &p) const
- void **selectAll** ()
- void **unselectAll** ()
- void **confirmPreSelection** (bool add=true)
- void **clearPreSelection** ()

8.35.1 Detailed Description

The [Map](#) class.

The documentation for this class was generated from the following files:

- src/editor/Game/[map.h](#)
- src/editor/Game/map.cpp

8.36 src.world.Map Class Reference

Public Member Functions

- def **__init__**
- def [fill](#)

Public Attributes

- **cells**
- **cellsGrid**

8.36.1 Member Function Documentation

8.36.1.1 def src.world.Map.fill (self)


Complète les cases par défaut

The documentation for this class was generated from the following file:

- src/world.py

8.37 MapDock Class Reference

Inheritance diagram for MapDock:



Public Member Functions

- **MapDock** (QWidget *parent=0)
- void **updateGame** ()

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/mapdock.h
- src/editor/GUI/Tabs/mapdock.cpp

8.38 MapPainter Class Reference

The [MapPainter](#) class that can paint a [Map](#) using a QPainter.

```
#include <mappainter.h>
```

Public Types

- enum [Element](#) { [Nothing](#) = 0, [CellBackground](#) = 1, [Grid](#) = 2, [CellSelection](#) = 4, [CellHighlighting](#) = 8, [Objects](#) = 16, [All](#) = 31 }

The Element enum describes the different elements that can be render.

Signals

- void [mapSizeChanged](#) (QSize)
- void [viewCenterChanged](#) (QPoint)

Public Member Functions

- [MapPainter](#) (QObject *parent=0)
- [MapPainter](#) ([Map](#) *m, QObject *parent=0)
- void [setPaintedElement](#) ([Element](#) e, bool painted=true)
- void [setPaintedElements](#) ([Element](#) e)
- void [setMap](#) ([Map](#) *m)
- void [paint](#) (QPainter &p)
- const QImage & [render](#) ()
- [RlCoords](#) [viewCenter](#) () const

- void [setViewCenter](#) ([RICoords](#) relativeCenter)
- void [setViewCenter](#) (double relativeCenterX, double relativeCenterY)
- void [setViewCenterQuiet](#) (double x, double y)
- double [scale](#) () const
- void [setScale](#) (double [scale](#))
- void [setScaleDomain](#) (double scaleMin, double scaleMax)
- bool [setHighlightedCell](#) (const [CICoords](#) &p)
- bool [setHighlightedCell](#) (int i, int j)
- QPoint [highlightedCell](#) () const
- bool [hasHighlightedCell](#) () const
- bool [isCell](#) (const [CICoords](#) &c) const
- void [resize](#) (QSize s)
- void [resize](#) (int wi, int he)
- QSize [size](#) () const
- void [zoom](#) (double factor, QPointF fixedPoint)
- QPair< bool, bool > [move](#) ([PxCoords](#) delta, QPointF center)
- QSize [virtualSize](#) () const
- [PxCoords](#) ptToPxl ([PtCoords](#) p) const
- [PtCoords](#) pxlToPt ([PxCoords](#) p) const
- [PtCoords](#) cooToPt ([CICoords](#) p) const
- [CICoords](#) ptToCoo ([PtCoords](#) p) const
- [PxCoords](#) cooToPxl ([CICoords](#) p) const
- [CICoords](#) pxlToCoo ([PxCoords](#) p) const
- [PtCoords](#) indToPt (int i, int j) const
- const QColor & [selectedCellColor](#) () const
- const QColor & [preSelectedCellColor](#) () const
- void [setSelectedCellColor](#) (const QColor &c)
- void [setPreSelectedCellColor](#) (const QColor &c)

8.38.1 Detailed Description

The [MapPainter](#) class that can paint a [Map](#) using a QPainter.

The class take charge of the different ratios of the [map](#) rendering and the area in which it will be rendered.

Note

The view is kept updated with the associated [map](#) at each [paint](#) or [render](#) call. It is thus just needed to call one of these functions to update the view after a modification.

To ensure a type checking security about the different types of coordinates that are used, four different types that inherit from QPointF are used : [RICoords](#), [CICoords](#), [PtCoords](#) and [PxCoords](#)

8.38.2 Member Enumeration Documentation

8.38.2.1 enum MapPainter::Element

The Element enum describes the different elements that can be render.

This includes both map's objects and user interaction and editing elements.

Element value can be used as flags using the operators operator| "|", operator| "&", operator| "^".

See also

[Cell](#), [CellType](#)

Enumerator:

Nothing Represent no elements

CellBackground The bacground associated to the [cell type](#)

Grid A thin grid that separate [cells](#)

CellSelection Graphical information about the selection state

CellHighlighting Graphical visualisation of the [cells](#) the mouse is over

Objects The objects that lay on the [cells](#)

All Represent all elements

8.38.3 Constructor & Destructor Documentation

8.38.3.1 MapPainter::MapPainter (QObject * parent = 0)

Constructs a new [MapPainter](#) with a default size of (42,42).

8.38.3.2 MapPainter::MapPainter (Map * m, QObject * parent = 0)

Constructs a new [MapPainter](#) with a default size of (42,42), and loads the [map](#) m.

8.38.4 Member Function Documentation

8.38.4.1 PtCoords MapPainter::cooToPt (CCoords p) const

Converts cells indice to virtual point coordinates

8.38.4.2 PxCoords MapPainter::cooToPxI (CCoords p) const

Convenient function equivalent to [ptToPxI\(cooToPt\(p\)\)](#)

8.38.4.3 `bool MapPainter::hasHighlightedCell () const`

Returns true if a [cell](#) is highlighted.

See also

[highlightedCell](#), [setHighlightedCell](#)

8.38.4.4 `QPoint MapPainter::highlightedCell () const`

Returns the integer index of the [cell](#) the is highlighted.

See also

[setHighlightedCell](#), [hasHighlightedCell](#)

8.38.4.5 `PtCoords MapPainter::indToPt (int i, int j) const`

Converts to coordinates

8.38.4.6 `bool MapPainter::isCell (const CICoords & c) const`

Returns true if the coordinate `c` correspond to a [cell](#).

8.38.4.7 `void MapPainter::mapSizeChanged (QSize) [signal]`

This signal is emitted when the total size of the [map](#)'s view change.

It appends mainly during scale change and modification on the [map](#) (resize, angles setting, ...).

8.38.4.8 `QPair< bool, bool > MapPainter::move (PxCoords delta, QPointF center)`

Change the center position from the given center and a pixel difference.

The return value indicate if the expected center was valid (regarding x or y coordinate).

See also

[setViewCenter](#)

8.38.4.9 `void MapPainter::paint (QPainter & p)`

Draws the map in the QPaintDevice.

See also

[render](#)

8.38.4.10 `const QColor & MapPainter::preSelectedCellColor () const`

Returns the color of the filter that is applied to pre-selected cells.

See also

[setPreSelectedCellColor](#), [selectedCellColor](#)

8.38.4.11 `CICoords MapPainter::ptToCoo (PtCoords p) const`

Converts virtual point to cell indice

8.38.4.12 `PxCoords MapPainter::ptToPxl (PtCoords p) const`

Converts virtual point to real pixel coordinates

8.38.4.13 `CICoords MapPainter::pxlToCoo (PxCoords p) const`

Convenient function equivalent to [ptToCoo](#)([pxlToPt](#)(p))

8.38.4.14 `PtCoords MapPainter::pxlToPt (PxCoords p) const`

Converts real pixel to virtual point coordinates

8.38.4.15 `const QImage & MapPainter::render ()`

Provides a QImage with a view of the map.

See also

[paint](#)

8.38.4.16 `void MapPainter::resize (QSize s)`

Change the size of the view, *ie* the rectangle in which the map will be render.

See also

[size](#)

8.38.4.17 void MapPainter::resize (int *wi*, int *he*)

This is an overload function, see [resize](#)

8.38.4.18 double MapPainter::scale () const

Returns the current scale of the view.

See also

[setScale](#)

8.38.4.19 const QColor & MapPainter::selectedCellColor () const

Returns the color of the filter that is applied to selected cells.

See also

[setSelectedCellColor](#), [preSelectedCellColor](#)

8.38.4.20 bool MapPainter::setHighlightedCell (const CCoords & *p*)

Sets the highlighted [cell](#) to the one at the [CCoords](#) *p*

See also

[highlightedCell](#), [hasHighlightedCell](#)

8.38.4.21 bool MapPainter::setHighlightedCell (int *i*, int *j*)

This is an overload function, see [setViewCenter](#).

8.38.4.22 void MapPainter::setMap (Map * *m*)

Loads the [map](#), computing the new size of the view area.

**8.38.4.23 void MapPainter::setPaintedElement (MapPainter::Element *e*, bool *painte*
=*true*)**

Enables or disables the render of an [element](#).

See also

[setPaintedElements](#)

8.38.4.24 void MapPainter::setPaintedElements (Element *e*)

Sets the rendered [elements](#).

See also

[setPaintedElement](#)

8.38.4.25 void MapPainter::setPreSelectedCellColor (const QColor & *c*)

Sets the color of the filter that is applied to pre-selected cells.

See also

[preSelectedCellColor](#), [setSelectedCellColor](#)

8.38.4.26 void MapPainter::setScale (double *scale*)

Sets the current view scale. This closest value in the scale domain will be used.

See also

[scale](#), [setScaleDomain](#)

8.38.4.27 void MapPainter::setScaleDomain (double *scaleMin*, double *scaleMax*)

Sets the valid values for the scale.

See also

[scale](#), [setScale](#)

8.38.4.28 void MapPainter::setSelectedCellColor (const QColor & *c*)

Sets the color of the filter that is applied to selected cells.

See also

[selectedCellColor](#), [setPreSelectedCellColor](#)

8.38.4.29 void MapPainter::setViewCenter (RICoords *relativeCenter*)

Change the view center, using relative coordinates.

If the new center is invalid (the view exceed the map area), the closest valid center is used.

See also

[viewCenter](#)

8.38.4.30 `void MapPainter::setViewCenter (double relativeCenterX, double relativeCenterY)`

This is an overload function, see [setViewCenter](#).

8.38.4.31 `void MapPainter::setViewCenterQuiet (double x, double y)`

does the same as [setViewCenter](#), without emitting the signal `viewCenterChanged` to avoid event loop.

8.38.4.32 `QSize MapPainter::size () const`

Return the size of the rectangle in which the map is render. This is also the size of the image returned by [render](#).

See also

[resize](#)

8.38.4.33 `RICoords MapPainter::viewCenter () const`

Return the relative coordinates of the current view center.

See also

[setViewCenter](#)

8.38.4.34 `void MapPainter::viewCenterChanged (QPoint) [signal]`

This signal is emitted when the center of the [map](#) change.
It appends mainly during moving on the view and zooming.

8.38.4.35 `QSize MapPainter::virtualSize () const`

Computes the total size of the image of the map

8.38.4.36 void **MapPainter::zoom** (double *factor*, QPointF *fixedPoint*)

Multiplying the scale of the view by factor, trying to leave the point center at the same position.

Note

It is not always possible to keep this point fixed, in particular when the view is resulting view would exceed the map region. In that case, the center is adapt to minimise the difference.

The documentation for this class was generated from the following files:

- src/editor/Game/[mappainter.h](#)
- src/editor/Game/mappainter.cpp

8.39 MapsEditor Class Reference

The [MapsEditor](#) class is the tab offering map editing facilities.

```
#include <mapseditor.h>
```

Public Slots

- void **updateGame** ()

Public Member Functions

- **MapsEditor** (QWidget *parent=0)
- void **setGame** ([Game](#) *g)

8.39.1 Detailed Description

The [MapsEditor](#) class is the tab offering map editing facilities.

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/mapseditor.h
- src/editor/GUI/Tabs/mapseditor.cpp

8.40 MapsListModel Class Reference

The [MapsListModel](#) class provides a presentation class for the Qt Model-View framework.

```
#include <mapslistmodel.h>
```

Public Slots

- void **update** ()

Public Member Functions

- **MapsListModel** ([World](#) *w, QObject *parent=0)
- int **rowCount** (const QModelIndex &parent) const Q_DECL_OVERRIDE
- QVariant **data** (const QModelIndex &index, int role) const Q_DECL_OVERRIDE
- bool **insertRows** (int row, int count, const QModelIndex &parent) Q_DECL_OVERRIDE
- bool **removeRows** (int row, int count, const QModelIndex &parent) Q_DECL_OVERRIDE

8.40.1 Detailed Description

The [MapsListModel](#) class provides a presentation class for the Qt Model-View framework.

The documentation for this class was generated from the following files:

- src/editor/Game/[mapslistmodel.h](#)
- src/editor/Game/mapslistmodel.cpp

8.41 src.map.MapViewer Class Reference

Public Member Functions

- def **__init__**
- def **load_chunks**
- def **make_walkables**
- def **zoom**
- def **move**
- def **render**
- def [neighbors_chunk](#)
- def **onscreen_chunks**
- def **update**
- def **propagate_trigger**
- def **compute_path**
- def **load_bg**

Public Attributes

- **map**
- **world**
- **scale**
- **cm_height**
- **width**
- **height**
- **walkablesGraph**
- **current_chunk**
- **pos_offset**
- **chunk_pos**
- **chunks_state**

8.41.1 Member Function Documentation

8.41.1.1 `def src.map.MapViewer.neighbors_chunk(self, chunk)`

Returns indexes of the neighbors of chunk and index of chunk

The documentation for this class was generated from the following file:

- src/map.py

8.42 src.cursescli.MapViewer Class Reference

Public Member Functions

- `def __init__`
- `def display`

Public Attributes

- **map**
- **world**
- **cellViews**

The documentation for this class was generated from the following file:

- src/cursescli.py

8.43 MapViewer Class Reference

The [MapViewer](#) class provides a widget to display and edit a [Map](#) using a [MapPainter](#).

```
#include <mapviewer.h>
```

Public Types

- enum [SelectionMode](#) { [PencilSelection](#), [RectangleSelection](#), [RegionSelection](#) }

The SelectionMode enum describes the different behaviour the cell selection can have.

Public Slots

- void **updateRequest** ()

Signals

- void **viewSizeChanged** (QSize)
- void **selectionChanged** ()

Public Member Functions

- **MapView** (QWidget *parent=0)
- void **setMap** ([Map](#) *m)
- void **updateMap** ()
- [MapPainter](#) & **mapPainter** ()
- void **setSelectionMode** ([SelectionMode](#) m)
- [SelectionMode](#) **selectionMode** () const

8.43.1 Detailed Description

The [MapView](#) class provides a widget to display and edit a [Map](#) using a [MapPainter](#).

Several [selection modes](#) are available. Combined with the “Ctrl” and “Shift” modifiers, a colossal amount of selection possibilities is offered. See [SelectionMode](#) for more information.

8.43.2 Member Enumeration Documentation

8.43.2.1 enum MapViewer::SelectionMode

The SelectionMode enum describes the different behaviour the cell selection can have.

The selection’s behaviour is based on two parameters :

- The keyboard modifiers that are pressed during selection.
- The current selection mode

If the “Ctrl” modifier is pressed, the past selected cells stay selected otherwise, they are all unselected

If the “Shift” modifier is pressed, the selection is inverted.

Three modes of selection exists :

Enumerator:

PencilSelection The [cells](#) under the cursor are selected

RectangleSelection The [cells](#) inside the rectangle defined by the clicked cell and the cell under the cursor are selected

RegionSelection The [cells](#) inside the region drawn by cursor’s moves are selected

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/mapviewer.h
- src/editor/GUI/Tabs/mapviewer.cpp

8.44 src.network.NetworkClient Class Reference

Public Member Functions

- def `__init__`
- def `askEntity`
- def `connect`
- def `run`
- def `send`
- def `sendEvent`
- def `kill`

Public Attributes

- `handle`
- `alive`
- `writer`

8.44.1 Detailed Description

This class manages the network activities of the client.
It allows the client to send messages (describing events) to the server.

8.44.2 Member Function Documentation

8.44.2.1 def src.network.NetworkClient.askEntity (self, ent)

Ask for an entity

8.44.2.2 `def src.network.NetworkClient.run (self)`

Main loop of the client's network task. After connecting the socket to the server, wait for orders and handle them immediately until connection ends.

8.44.2.3 `def src.network.NetworkClient.sendEvent (self, obj, event)`

Send an event to the server in a formatted way, specifying the id of the object to affect.

The documentation for this class was generated from the following file:

- `src/network.py`

8.45 `src.networkudp.NetworkClient` Class Reference

Inherits `Thread`.

Public Member Functions

- `def __init__`
- `def run`
- `def send`
- `def sendEvent`
- `def kill`

Public Attributes

- `handle`
- `soc`
- `alive`

The documentation for this class was generated from the following file:

- `src/networkudp.py`

8.46 `src.network.NetworkServer` Class Reference

Public Member Functions

- `def __init__`
- `def waitForClients`

- def **connect**
- def **run**
- def **sendOrder**
- def **broadcast**

Public Attributes

- **handle**
- **loop**
- **alive**
- **connections**
- **server**

8.46.1 Detailed Description

This class is the task of the server that manages clients connections on his port. It keeps the list of connected clients and provides method to broadcast messages to all the clients.

8.46.2 Constructor & Destructor Documentation

8.46.2.1 def src.network.NetworkServer.__init__(self, handle, loop)

The server listen on the port specified in const.py.

8.46.3 Member Function Documentation

8.46.3.1 def src.network.NetworkServer.run(self)

When a client tries to connect, the server adds him to the list and creates a new task managing communications with this client.

8.46.3.2 def src.network.NetworkServer.sendOrder(self, ident, order)

Send an order to all connected clients by broadcasting messages to all threads in the list.

8.46.3.3 def src.network.NetworkServer.waitForClients(self, n)

Block until n clients are connected

The documentation for this class was generated from the following file:

- src/network.py

8.47 src.networkudp.NetworkServer Class Reference

Inherits Thread.

Public Member Functions

- def **__init__**
- def **waitForClients**
- def **run**
- def **sendOrder**
- def **broadcast**
- def **kill**

Public Attributes

- **handle**
- **soc**
- **alive**
- **addr**

The documentation for this class was generated from the following file:

- src/networkudp.py

8.48 NewGame Class Reference

Public Member Functions

- **NewGame** (QWidget *parent=0)
- QString **name** () const
- QString **folder** () const
- bool **createFolder** () const

The documentation for this class was generated from the following files:


- src/editor/GUI/newgame.h
- src/editor/GUI/newgame.cpp

8.49 Object Class Reference

The [Object](#) class.

```
#include <object.h>
```

Inheritance diagram for Object:



Public Member Functions

- **Object** ([Game](#) *g, [GameObject](#) *parent)

8.49.1 Detailed Description

The [Object](#) class.

The documentation for this class was generated from the following files:

- src/editor/Game/[object.h](#)
- src/editor/Game/object.cpp

8.50 ObjectEditor Class Reference

Public Member Functions

- **ObjectEditor** (QWidget *parent=0)
- void **setGame** ([Game](#) *g)

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/objecteditor.h
- src/editor/GUI/Tabs/objecteditor.cpp

8.51 ObjectFlagTableModel Class Reference

Public Member Functions

- **ObjectFlagTableModel** ([GameObject](#) *obj, QObject *parent=0)

- int **rowCount** (const QModelIndex &parent) const Q_DECL_OVERRIDE
- int **columnCount** (const QModelIndex &parent) const Q_DECL_OVERRIDE
- QVariant **data** (const QModelIndex &index, int role) const Q_DECL_OVERRIDE
- Qt::ItemFlags **flags** (const QModelIndex &index) const
- bool **setData** (const QModelIndex &index, const QVariant &value, int role)
- QVariant **headerData** (int section, Qt::Orientation orientation, int role) const

The documentation for this class was generated from the following files:

- src/editor/Game/[mapslistmodel.h](#)
- src/editor/Game/mapslistmodel.cpp

8.52 ObjectParamTableModel Class Reference

Public Member Functions

- **ObjectParamTableModel** ([GameObject](#) *obj, QObject *parent=0)
- int **rowCount** (const QModelIndex &parent) const Q_DECL_OVERRIDE
- int **columnCount** (const QModelIndex &parent) const Q_DECL_OVERRIDE
- QVariant **data** (const QModelIndex &index, int role) const Q_DECL_OVERRIDE
- Qt::ItemFlags **flags** (const QModelIndex &index) const
- bool **setData** (const QModelIndex &index, const QVariant &value, int role)
- QVariant **headerData** (int section, Qt::Orientation orientation, int role) const

The documentation for this class was generated from the following files:

- src/editor/Game/[mapslistmodel.h](#)
- src/editor/Game/mapslistmodel.cpp

8.53 src.world.ObjectType Class Reference

Public Member Functions

- def **__init__**
- def [create](#)
- def **__str__**

Public Attributes

- **type**

8.53.1 Detailed Description

Les types d'objets (au sens informatique)

8.53.2 Member Function Documentation

8.53.2.1 `def src.world.ObjectType.create (self)`

Instantiation d'un objet à partir du type

The documentation for this class was generated from the following file:

- `src/world.py`

8.54 Options Struct Reference

The [Options](#) class provides session-independant options and preferences.

```
#include <options.h>
```

Public Member Functions

- `template<class T >`
`T load (QString group, QString opt)`
- `template<class T >`
`void save (QString group, QString opt, T val)`
- `template<class T >`
`void setDefault (QString group, QString opt, T val)`
- `bool isAdjustable (QString group, QString opt, bool adjust=true)`
- `void setAdjustable (QString group, QString opt, bool adjust)`
- `void reinitialise (QString group="")`

Static Public Member Functions

- static [Options](#) & [options](#) ()

8.54.1 Detailed Description

The [Options](#) class provides session-independant options and preferences.

Features

The [Options](#) class aims at storing global options, that are available at any place in the entire application. The preferences are permanantly stored and remain between the separate sessions and windows.

Two sorts of options exist :

- The adjustable ones : the value of the option change when [save](#) is called.
- The non-adjustable ones : the value of the option doesn't change is [save](#) is called, the option must be modified with `.`

The sort of option can be set with the [setAdjustable](#) function.

Design

The [Options](#) class is designed following the `__Singleton` design pattern. The constructor is thus private, and the only [Options](#) instance is created at the first call of [options](#).

QSetting is used internally, see Qt's documentation for details about the storing mechanisms.

Reading and writing existing options

To read or write options, the [Options](#) instance must be retrieved, using the [options](#) function, then the [load](#) and [save](#) functions can be called.

Adding options

To add a new option, it is only needed to add a default hard coded value, using the [Default](#) and [DefaultF](#) macros in the [Options](#) constructor.

It is strongly advice to use macro to define new options group (see [WIN](#), for an example).

Note

To use [Options](#) with custom types (other than "C++" standard), the defining header of the type must be included at the top of the [options.h](#) file, in order to be used in the default value declaration.

Warning

Pointer objects are not supported, and the result of the use of the [Options](#) class with such values is undefined.

See also

[options.h](#)

8.54.2 Member Function Documentation

8.54.2.1 `bool Options::isAdjustable (QString group, QString opt, bool adjust = true)`

Returns "true" if the option defined by its group and name is adjustable, "false" elsewhere.

See also

[setAdjustable](#)

8.54.2.2 `template<class T> T Options::load (QString group, QString opt) [inline]`

Reads an option defined by its group and name.

Note

The template argument must be precised since it can't be deduced from arguments' types.

Warning

If the option type and the reading type mismatch, an default null value is returned.

See also

[save](#)

8.54.2.3 Options & Options::options () [static]

Returns the unique [Options](#) instance.

8.54.2.4 void Options::reinitialise (QString group = " ")

Clear all options from the group. If "group == """, all entries are deleted.

**8.54.2.5 template<class T > void Options::save (QString group, QString opt, T val)
[inline]**

Writes the new value of the options defined by its group and name, if the option is adjustable. See [Options](#) for details about options types.

Note

The template argument can be omitted since it would be deduced from the value argument.

See also

[setDefault](#), [load](#)

8.54.2.6 void Options::setAdjustable (QString group, QString opt, bool adjust)

Sets if the option defined by its group and name is adjustable.

See also

[isAdjustable](#)

8.54.2.7 `template<class T > void Options::setDefault (QString group, QString opt, T val)`
`[inline]`

Writes the new value of the options defined by its group and name, whatever the option type is. See [Options](#) for details about options types.

Note

The template argument can be omitted since it would be deduced from the value argument.

See also

[save](#), [load](#)

The documentation for this struct was generated from the following files:

- `src/editor/GUI/options.h`
- `src/editor/GUI/options.cpp`

8.55 `src.orders.Order` Class Reference

Public Member Functions

- `def __init__`
- `def __getattr__`
- `def __setattr__`
- `def copy`
- `def load`
- `def toBytes`
- `def fromBytes`

Public Attributes

- `type`
- `args`

Static Public Attributes

- list `params` = [None]

8.55.1 Detailed Description

Représente une modification à apporter au monde

8.55.2 Member Function Documentation

8.55.2.1 def src.orders.Order.fromBytes (self, b)

Récupère l'ordre à partir d'un bytes réseau

8.55.2.2 def src.orders.Order.load (self, dat, named)

Initialise l'ordre avec une structure provenant d'un Xml

8.55.2.3 def src.orders.Order.toBytes (self)

Bytes pour envoyer l'ordre sur le réseau

The documentation for this class was generated from the following file:

- src/orders.py

8.56 src.orders.OrderDispatcher Class Reference

Public Member Functions

- def `__init__`
- def `treat`

Public Attributes

- `world`
- `handle`
- `timer`

8.56.1 Detailed Description

Traite les ordres pour le client ou le serveur

8.56.2 Member Function Documentation

8.56.2.1 def src.orders.OrderDispatcher.treat (self, emitter, order)

Traite un ordre et renvoie l'éventuel ordre à retransmettre

The documentation for this class was generated from the following file:

- src/orders.py

8.57 ParamItemDelegate Class Reference

Public Member Functions

- **ParamItemDelegate** (QObject *parent=nullptr)
- QWidget * **createEditor** (QWidget *parent, const QStyleOptionViewItem &option, const QModelIndex &index) const
- void **setEditorData** (QWidget *editor, const QModelIndex &index) const
- void **updateEditorGeometry** (QWidget *editor, const QStyleOptionViewItem &option, const QModelIndex &index) const
- void **setModelData** (QWidget *editor, QAbstractItemModel *model, const QModelIndex &index) const

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/objecteditor.h
- src/editor/GUI/Tabs/objecteditor.cpp

8.58 src.tools.Perf Class Reference

Public Member Functions

- def **__init__**
- def **tic**
- def **toc**
- def **show**

Public Attributes

- **num**
- **avg**
- **min**
- **max**
- **t**

8.58.1 Detailed Description

Calcule les performances d'un morceau de code

8.58.2 Member Function Documentation

8.58.2.1 def src.tools.Perf.show (self)

Affiche le rapport

8.58.2.2 def src.tools.Perf.tic (self)

À lancer avant la fonction

8.58.2.3 def src.tools.Perf.toc (self)

À lancer après la fonction

The documentation for this class was generated from the following file:

- src/tools.py

8.59 PtCoords Class Reference

The [PtCoords](#) class describe positions with virtual point coordinates.

```
#include <mappainter.h>
```

Public Member Functions

- **PtCoords** (qreal x, qreal y)
- **PtCoords** (const QPointF &p)

8.59.1 Detailed Description

The [PtCoords](#) class describe positions with virtual point coordinates.

Theses coordinates describe each point relatively to the view. They correspond to a point in the image containing the entire map.

See also

[RlCoords](#), [ClCoords](#), [PxCoords](#)

The documentation for this class was generated from the following file:

- src/editor/Game/[mappainter.h](#)

8.60 PxCoords Class Reference

The [PxCoords](#) class describe positions with real pixel coordinates.

```
#include <mappainter.h>
```

Public Member Functions

- **PxCoords** (qreal x, qreal y)
- **PxCoords** (const QPointF &p)
- **PxCoords** (const QPoint &p)
- **PxCoords** (int x, int y)

8.60.1 Detailed Description

The [PxCoords](#) class describe positions with real pixel coordinates.

Theses coordinates describe the pixel position.

See also

[RCoords](#), [CCoords](#), [PtCoords](#)

The documentation for this class was generated from the following file:

- src/editor/Game/[mappainter.h](#)

8.61 RCoords Class Reference

The [RCoords](#) class describe positions with relative coordinates.

```
#include <mappainter.h>
```

Public Member Functions

- **RCoords** (qreal x, qreal y)
- **RCoords** (const QPointF &p)

8.61.1 Detailed Description

The [RCoords](#) class describe positions with relative coordinates.

Theses coordinates have values in $[0, 1]$, for every point in the view.

See also


[CCoords](#) [PtCoords](#), [PxCoords](#)

The documentation for this class was generated from the following file:

- src/editor/Game/[mappainter.h](#)

8.62 src.cache.ScaledCache Class Reference

Inheritance diagram for src.cache.ScaledCache:

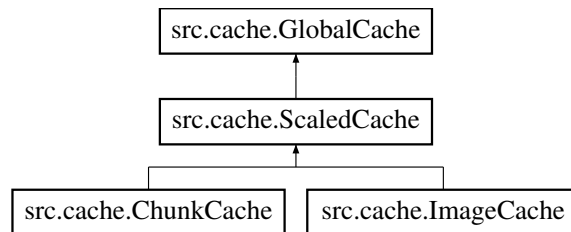

Public Member Functions


- def **add_scaled**
- def **remove**
- def **get_elt**
- def **free_cache**

The documentation for this class was generated from the following file:

- src/cache.py

8.63 SelectionDock Class Reference

Inheritance diagram for SelectionDock:



Public Member Functions

- **SelectionDock** ([MapView](#) *mv, QWidget *parent=0)

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/selectiondock.h
- src/editor/GUI/Tabs/selectiondock.cpp

8.64 src.server.Server Class Reference

Public Member Functions

- def **__init__**
- def **__del__**
- def **run**
- def **main**
- def **handleEvent**

Public Attributes

- **loop**
- **net**
- **world**
- **actions**
- **timer**
- **orderDispatcher**
- **events**
- **pause**
- **coEntities**

8.64.1 Detailed Description

Classe principale du processus serveur, concilie réseau, monde, actions et timer

The documentation for this class was generated from the following file:

- src/server.py

8.65 src.network.ServerConnection Class Reference

Public Member Functions

- def **__init__**
- def **run**
- def **send**
- def **end**

Public Attributes

- **reader**
- **writer**
- **handle**
- **entity**
- **server**

8.65.1 Detailed Description

This thread manages the communications with one particular client (one thread is created by client).

8.65.2 Member Function Documentation

8.65.2.1 `def src.network.ServerConnection.run (self)`

Wait for messages from the client and handle them immediately.

The documentation for this class was generated from the following file:

- `src/network.py`

8.66 TabAcces Class Reference

Signals

- void **activated** (int i)

Public Member Functions

- **TabAcces** (int i, const QString &n, const QPixmap &p, QWidget *parent=0)
- void **setActive** (bool a)

The documentation for this class was generated from the following files:

- `src/editor/GUI/tabacces.h`
- `src/editor/GUI/tabacces.cpp`

8.67 TabBar Class Reference

Public Slots

- void **setCurrentTab** (int t)

Signals

- void **currentTabChanged** (int)

Public Member Functions

- **TabBar** (QWidget *parent=0)
- void **addTabAcces** (const QString &n, const QPixmap &p)
- int **currentTab** () const
- void **setTabsEnabled** (bool e)

The documentation for this class was generated from the following files:

- src/editor/GUI/tabbar.h
- src/editor/GUI/tabbar.cpp

8.68 src.tools.Timer Class Reference

Public Member Functions

- def **__init__**
- def **add**
- def **run**

Public Attributes

- **dt**
- **step**
- **heap**
- **pause**
- **count**
- **time**

8.68.1 Detailed Description

Déclenche des appels différés de couroutine

8.68.2 Member Function Documentation

8.68.2.1 def src.tools.Timer.add (self, time, func, args)

Inscrit l'appel de func avec les arguments args

The documentation for this class was generated from the following file:

- src/tools.py

8.69 src.utils.WalkableGraph Class Reference

Public Member Functions

- def `__init__`
- def `get_neighbors`
- def `dist`
- def `get_path`

Public Attributes

- `walkables`

The documentation for this class was generated from the following file:

- `src/utils.py`

8.70 Welcome Class Reference

Public Member Functions

- **Welcome** (QWidget *parent=0)

The documentation for this class was generated from the following files:


- `src/editor/GUI/Tabs/welcome.h`
- `src/editor/GUI/Tabs/welcome.cpp`

8.71 World Class Reference

The [World](#) class.

```
#include <game.h>
```

Inheritance diagram for World:



Public Member Functions

- **World** ([Game](#) *g, [GameObject](#) *parent)
- **ObjectListD** (m, M, ap, s, [Map](#)) ObjectListD(o)

Public Attributes

- **O**
- **bject**
- **s**

8.71.1 Detailed Description

The [World](#) class.

The documentation for this class was generated from the following files:

- src/editor/Game/[game.h](#)
- src/editor/Game/game.cpp

8.72 src.world.World Class Reference

Public Member Functions

- def **__init__**

Public Attributes

- **maps**
- **entities**
- **objects**

The documentation for this class was generated from the following file:

- src/world.py

8.73 WorldEditor Class Reference

Public Member Functions


- **WorldEditor** (QWidget *parent=0)
- void **setGame** ([Game](#) *g)

The documentation for this class was generated from the following files:

- src/editor/GUI/Tabs/worldeditor.h
- src/editor/GUI/Tabs/worldeditor.cpp

8.74 src.printWorld.WorldViewer Class Reference

Inheritance diagram for src.printWorld.WorldViewer:



Public Member Functions

- def `__init__`
- def `get_event`
- def `end`
- def `update`
- def `render`
- def `move`
- def `move_char`
- def `propagate_trigger`

Public Attributes

- `screen_size`
- `current_map`
- `main_char`
- `characters`

8.74.1 Constructor & Destructor Documentation

8.74.1.1 `def src.printWorld.WorldViewer.__init__(self, w)`

Initialize the pygame Interface

8.74.2 Member Function Documentation

8.74.2.1 `def src.printWorld.WorldViewer.end(self)`

End the display

8.74.2.2 `def src.printWorld.WorldViewer.get_event (self)`

Return current pygame events stack

8.74.2.3 `def src.printWorld.WorldViewer.move (self, dx, dy)`

Move the current map by dx,dy, return the rectangle of modifications

8.74.2.4 `def src.printWorld.WorldViewer.move_char (self, ident, end_pos)`

Move the entitie ident to cell end_pos

8.74.2.5 `def src.printWorld.WorldViewer.propagate_trigger (self, event)`

Propagate event to next objects in the arborescence, here its the current map

8.74.2.6 `def src.printWorld.WorldViewer.render (self)`

Return the new image to show on screen

8.74.2.7 `def src.printWorld.WorldViewer.update (self)`

Update the view

The documentation for this class was generated from the following file:

- `src/printWorld.py`

8.75 XmlHandler Class Reference

Public Member Functions

- **XmlHandler** ([Game](#) *g)
- bool **startElement** (const QString &, const QString &localName, const QString &, const QDomAttributes &atts)
- bool **endElement** (const QString &, const QString &localName, const QString &)

The documentation for this class was generated from the following files:

- `src/editor/Game/xmlhandler.h`
- `src/editor/Game/xmlhandler.cpp`

Chapter 9

File Documentation

9.1 src/editor/Game/game.h File Reference

Definition of the [Game](#) and [World](#) classes.

```
#include "object.h" #include "map.h"
```

Classes

- class [World](#)
The [World](#) class.
- class [Game](#)
The [Game](#) class gather the differents parts needed to describe a game.

9.1.1 Detailed Description

Definition of the [Game](#) and [World](#) classes.

9.2 src/editor/Game/map.h File Reference

Definition of the [Map](#), [Cell](#) and [CellType](#) classes.

```
#include "object.h"
```

Classes

- class [CellType](#)
The [CellType](#) class.
- class [Cell](#)

The [Cell](#) class.

- class [Map](#)

The [Map](#) class.

Defines

- #define [forCells](#)(i) int nbCell = width()*height(); for(int i(0); i<nbCell; ++i)

9.2.1 Detailed Description

Definition of the [Map](#), [Cell](#) and [CellType](#) classes.

9.2.2 Define Documentation

9.2.2.1 #define [forCells](#)(i) int nbCell = width()*height(); for(int i(0); i<nbCell; ++i)

Usefull macro to set up a for on the cells

9.3 src/editor/Game/mappainter.h File Reference

Definition of the [MapPainter](#) class and other related classes to render [maps](#).

```
#include "map.h" #include "GUI/options.h"
```

Classes

- class [RlCoords](#)
The [RlCoords](#) class describe positions with relative coordinates.
- class [ClCoords](#)
The [ClCoords](#) class describe positions with cell coordinates.
- class [PtCoords](#)
The [PtCoords](#) class describe positions with virtual point coordinates.
- class [PxCoords](#)
The [PxCoords](#) class describe positions with real pixel coordinates.
- class [MapPainter](#)
The [MapPainter](#) class that can paint a [Map](#) using a [QPainter](#).

Defines

- #define **MINMAX**(a, x, b) std::min(std::max(a,x),b)

Functions

- [MapPainter::Element operator|](#) ([MapPainter::Element](#) a, [MapPainter::Element](#) b)
The operator | is the flag OR operation.
- [MapPainter::Element operator&](#) ([MapPainter::Element](#) a, [MapPainter::Element](#) b)
The operator & is the flag AND operation.
- [MapPainter::Element operator^](#) ([MapPainter::Element](#) a, [MapPainter::Element](#) b)
The operator ^ is the flag subtraction operation.

9.3.1 Detailed Description

Definition of the [MapPainter](#) class and other related classes to render [maps](#). This file defines four types of coordinates : [RlCoords](#), [ClCoords](#), [PtCoords](#) and [PxCoords](#). - They all inherit from `QPointF`, and give a static type checking for the consistency of the coordinates which are used.

Author

Baptiste Pauget

9.3.2 Function Documentation

9.3.2.1 [MapPainter::Element operator^](#) ([MapPainter::Element](#) a, [MapPainter::Element](#) b) `[inline]`

The operator ^ is the flag subtraction operation.

Warning

This is not a XOR operation, it corresponds to `a&!b`

9.4 src/editor/Game/mapslistmodel.h File Reference

Definition of Model/View presentation classes.

```
#include <QAbstractListModel>    #include <QAbstractTableModel>
#include "game.h" #include "mappainter.h"
```

Classes

- class [MapsListModel](#)
The [MapsListModel](#) class provides a presentation class for the Qt Model-View framework.
- class [CellTypeListModel](#)

The [CellTypeListModel](#) class.

- class [ObjectParamTableModel](#)
- class [ObjectFlagTableModel](#)

9.4.1 Detailed Description

Definition of Model/View presentation classes.

9.5 src/editor/Game/object.h File Reference

Definition of the base class [GameObject](#), and some inherited classes.

```
#include <QtCore> #include <QtGui> #include <assert.h>
```

Classes

- class [GameObject](#)

The [GameObject](#) class is the base class for every part of games.

- class [Image](#)

The [Image](#) class stores an external file in a *QImage*, and gives each image resources a unique identifier.

- class [Object](#)

The [Object](#) class.

Defines

- #define [ObjectsMapC](#)(name, names, Type, Types, pref, arg)
- #define [ObjectsMap](#)(pref, ini, Ini, body, sg, pl) [ObjectsMapC](#)(ini##body##sg, ini##body##pl, Ini##body##sg, Ini##body##pl, pref, ini)
- #define [ObjectListDef](#)(Objects, Type) private: QMap<int, Type*> a##Objects; public:
- #define [ObjectListAdd](#)([Object](#), Objects, Type) void add##[Object](#)(Type* new##[Object](#)){a##Objects[new##[Object](#)->ident()] = new##[Object](#); touch();}
- #define [ObjectListTake](#)([Object](#), Objects, Type) Type* take##[Object](#)(int id){touch(); return a##Objects.take(id);}
- #define [ObjectListGetter](#)(object, Objects, Type) inline Type* object(int id) const{return a##Objects.value(id, nullptr);}
- #define [ObjectListValues](#)(objects, Objects, Type) inline QList<Type*> objects() const{return a##Objects.values();}
- #define [ObjectListGetters](#)(object, [Object](#), objects, Objects, Type) ObjectList-Getter(object, Objects, Type) ObjectListValues(objects, Objects, Type)
- #define [ObjectListModifiers](#)([Object](#), Objects, Type) ObjectListAdd([Object](#), -Objects, Type) ObjectListTake([Object](#), Objects, Type)

- `#define ObjectList(object, Object, objects, Objects, Type) ObjectListDef(-Objects,Type) ObjectListGetters(object,Object,objects,Objects,Type) ObjectListModifiers(Object, Objects, Type)`
- `#define ObjectListD(init, Init, body, sg, pl, Type) ObjectList(init##body##sg,-Init##body##sg,init##body##pl,Init##body##pl,Type)`
- `#define C(Macro, init, Init, body,...) Macro(init##body, Init##body, ## __VA_ARGS__)`
- `#define C0(Macro, init, Init, body) Macro(init##body, Init##body)`
- `#define C1(Macro, init, Init, body, arg) Macro(init##body, Init##body, arg)`
- `#define SetFlag(flag, value) aFlags[#flag] = value`
- `#define FlagGetter(flag, Flag) inline bool is##Flag() const{return aFlags[#flag];}`
- `#define FlagSetter(flag, Flag) inline void set##Flag(bool flag){SetFlag(flag,flag); touch();}`
- `#define Flag(flag, Flag) FlagGetter(flag, Flag) FlagSetter(flag, Flag)`
- `#define SetParam(param, value) aParams[#param] = value`
- `#define ParamGetter(param) inline int param() const{return aParams[#param];}`
- `#define ParamSetter(param, Param) inline void set##Param(int param##Value){SetParam(param,param##Value); touch();}`
- `#define Param(param, Param) ParamGetter(param) ParamSetter(param, Param)`
- `#define AttrGetter(attr, Attr, Type) inline Type* attr() const{return a##Attr;}`
- `#define AttrFree(Attr) if(a##Attr) a##Attr->removeReference();`
- `#define AttrLink(Attr) if(a##Attr) a##Attr->addReference();`
- `#define AttrSetter(attr, Attr, Type) inline void set##Attr(Type* new##Attr){AttrFree(Attr); a##Attr = new##Attr; AttrLink(Attr); touch();}`
- `#define AttrDef(Attr, Type) private: Type* a##Attr = nullptr; public:`
- `#define Attr(attr, Attr, Type) AttrDef(Attr, Type) AttrGetter(attr,Attr,Type) AttrSetter(attr, Attr, Type)`
- `#define AttrT(type, Type) Attr(type, Type, Type)`

9.5.1 Detailed Description

Definition of the base class [GameObject](#), and some inherited classes. `##` The objects structure

`###` Objects destructors

`##` The Macro System

To add conveniently attributes and flags to [GameObject](#) subclassed objects, a set of macro is provided.

`###` Name conventions

For a attribute named `attr`, the following conventions are observed :

- `attr()` is the getter method
- `setAttr()` is the setter method
- `aAttr` is the name of the attribut (if any)

A specific convention is applied for flags (boolean attributes) :

- isAttr() is the getter method

Macros

To define a new attribute, a global macro can be used in the class declaration. The provided basic implementations keep the object edition synchronization.

If a cleverer process is needed, custom getter or setter can be implemented, and the getter and setter macros can be used separately to define the obvious methods

****Provided macros****

Attribute Type	Complete declaration	Getter	Setter
Flags (bool)	Flag FlagGetter FlagSetter	Parameters (int)	Param ParamGetter ParamSetter
GameObject based Attributes	Attr AttrGetter AttrSetter		

****The case of attributes****

An additionnal [AttrT](#) macro is provided, that deduce a default name from the type.

Name tools

To make the definition easier and avoid the name repetition that is introduced by the name convention, a [C](#) macro is provided to construct the names with lower and upper initial letter from theses letter and the end of the name.

Author

Baptiste Pauget

9.5.2 Define Documentation

9.5.2.1 `#define Attr(attr, Attr, Type) AttrDef(Attr, Type) AttrGetter(attr,Attr,Type) AttrSetter(attr, Attr, Type)`

The Attr macro defines a new `<aAttr>` named attribute of type `Type`, with its generic getter and setter methods.

With respect to the [name convention](#), this macro needs the parameter's name with lower and upper initial letter case.

Example

```
{.cpp}
Attr(parent,Parent, GameObject)
-->
private:
    GameObject *aParent;
public:
    inline GameObject* parent() const{return aParent;}
    inline void setParent(GameObject* parentObject){aParent = parentObject; touch();}
```

See also

[AttrT](#), [AttrDef](#), [AttrSetter](#), [AttrGetter](#), [C](#)

9.5.2.2 `#define AttrDef(Attr, Type) private: Type* a##Attr = nullptr; public:`

The `AttrDef` macro defines a private attribute name `<aAttr>`.

Note

To avoid redefinition error, no attribute or method name `<aAttr>` must exist.

Warning

This macro is designed to be used in a public part of the class. Please note that inserting this macro in a private or protected part will change the visibility of the next declaration to public.

Example

```
{.cpp}
Attr(Parent,GameObject)
-->
private:
    GameObject *aParent;
public:
```

See also

[Attr](#)

9.5.2.3 `#define AttrGetter(attr, Attr, Type) inline Type* attr() const{return a##Attr;}`

The `AttrGetter` macro defines a generic getter method for the attribute named `attr` of type `Type`.

With respect to the [name convention](#), this macro needs the attribute's name with lower and upper initial letter case.

Example

```
{.cpp}
AttrGetter(parent,Parent,GameObject)
--> inline GameObject* parent() const{return aParent;}
```

See also

[Attr](#), [AttrSetter](#), [C](#)

9.5.2.4 **#define AttrSetter(attr, Attr, Type)** inline void set##Attr(Type* new##Attr){AttrFree(Attr); a##Attr = new##Attr; AttrLink(Attr); touch();}

The AttrSetter macro defines a generic setter method for the attribute named `attr` of type `Type`.

With respect to the [name convention](#), this macro needs the attribute's name with lower and upper initial letter case.

Example

```
{.cpp}
AttrSetter(parent,Parent,GameObject)
--> inline void setParent(GameObject* &parentObject){aParent =
    parentObject; touch();}
```

See also

[Attr](#), [AttrGetter](#), [C](#)

9.5.2.5 **#define AttrT(type, Type)** Attr(type, Type, Type)

The AttrT macro defines a new attribute of type `Type`, named after the type name, with its generic getter and setter methods.

With respect to the [name convention](#), this macro needs the parameter's type with lower and upper initial letter case.

Example

```
{.cpp}
AttrT(cellType,CellType)
-->
private:
    CellType *aCellType;
public:
    inline CellType* cellType() const{return aCellType;}
    inline void setCellType(CellType* cellTypeObject){aCellType =
        cellTypeObject; touch();}
```

See also

[Attr](#), [AttrDef](#), [AttrSetter](#), [AttrGetter](#), [C](#)

9.5.2.6 **#define C(Macro, init, Init, body, ...)** Macro(init##body, Init##body, ##__VA_ARGS__)

The C macro calls the Macro argument with argument tokens formed by the concatenation of `init` and `body`, and `Init` and `body`.

This enables to call a macro with the same argument, with the initial letter in lower and upper case.

A custom number of arguments can be added after the `body` one.

Note

This use of variadic arguments follow the [gcc specification](#), but can be not supported by some compilers.

As some IDE does not fully support variadic macro expansion, the [C0](#) and [C1](#) macros can be used to avoid some inconvenience due to uncomplete code understanding.

Example

```
{.cpp}
C(Param,w,W,idth)
    --> Param(width, Width)

C(Attr, p,P,arent, GameObject)
    --> Attr(parent, Parent, GameObject)
```

See also

[object.h](#)

9.5.2.7 #define C0(Macro, init, Init, body) Macro(init##body, Init##body)

The C0 macro is equivalent to the [C](#) macro, with no additional argument.

This macro is provided to avoid the use of variadic arguments that are currently not totally supported by some IDE. **Example**

```
{.cpp}
C(Flag, v,V,isible)
    --> Flag(visible, Visible)
```

See also

[C1](#)

9.5.2.8 #define C1(Macro, init, Init, body, arg) Macro(init##body, Init##body, arg)

The C1 macro is equivalent to the [C](#) macro, with one additional argument.

This macro is provided to avoid the use of variadic arguments that are currently not totally supported by some IDE. **Example**

```
{.cpp}
C(Attr, p,P,arent, GameObject)
    --> Attr(parent, Parent, GameObject)
```

See also

[C0](#)

9.5.2.9 `#define Flag(flag, Flag) FlagGetter(flag, Flag) FlagSetter(flag, Flag)`

The `Flag` macro defines generic getter and setter methods for the flag named `flag`.

With respect to the [name convention](#), this macro needs the flag's name with lower and upper initial letter case.

Example

```
{.cpp}
Flag(visible,Visible)
--> inline bool isVisible() const{return aFlags["visible"];}
    inline void setVisible(bool visible){aFlags["visible"] = visible;
    touch() }
```

See also

[FlagGetter](#), [FlagSetter](#), [C](#)

9.5.2.10 `#define FlagGetter(flag, Flag) inline bool is##Flag() const{return aFlags[#flag];}`

The `FlagGetter` macro defines a generic getter method for the flag named `flag`.

With respect to the [name convention](#), this macro needs the flag's name with lower and upper initial letter case.

Warning

The default getter method does not check whether the `flag` named flag really exist. To avoid runtime access error, it is strongly advice to initialize the flag in the object's constructor, using the setter method or the [SetFlag](#) macro.

Example

```
{.cpp}
FlagGetter(visible,Visible)
--> inline bool isVisible() const{return aFlags["visible"];}
```

See also

[Flag](#), [FlagSetter](#), [C](#)

9.5.2.11 `#define FlagSetter(flag, Flag) inline void set##Flag(bool flag){SetFlag(flag,flag); touch();}`

The `FlagSetter` macro defines a generic setter method for the flag named `flag`.

With respect to the [name convention](#), this macro needs the flag's name with lower and upper initial letter case.

Example


```
{.cpp}
FlagSetter(visible,Visible)
--> inline void setVisible(bool visible){aFlags["visible"] = visible;
touch() }
```

See also

[Flag](#), [FlagGetter](#), [C](#)

9.5.2.12 `#define ObjectsMap(pref, ini, Ini, body, sg, pl) ObjectsMapC(ini##body##sg, ini##body##pl, Ini##body##sg, Ini##body##pl, pref,ini)`

Deprecated

9.5.2.13 `#define ObjectsMapC(name, names, Type, Types, pref, arg)`

Value:

```
private: \
    QMap<int, Type*> pref##Types; \
public: \
    void add##Type(Type* arg){pref##Types[arg->ident()] = arg; touch();} \
    void remove##Type(Type* arg){if(pref##Types.contains(arg->ident()))pref##
    Types.remove(arg->ident()); touch();} \
    inline Type* name(int id) const{return pref##Types.value(id, nullptr);} \
    inline QList<Type*> names() const{return pref##Types.values();}
```

Deprecated

9.5.2.14 `#define Param(param, Param) ParamGetter(param) ParamSetter(param, Param)`

The Param macro defines generic getter and setter methods for the parameter named param.

With respect to the [name convention](#), this macro needs the parameter's name with lower and upper initial letter case.

Example

```
{.cpp}
Param(width,Width)
--> inline int width() const{return aParams["width"];}
    inline void setWidth(int widthValue){aParams["width"] = widthValue;
touch();}
```

See also

[ParamGetter](#), [ParamSetter](#), [C](#)

9.5.2.15 `#define ParamGetter(param) inline int param() const{return aParams[#param];}`

The ParamGetter macro defines a generic getter method for the parameter named `param`.

Warning

The default getter method does not check whether the `param` named parameter really exist. To avoid runtime access error, it is strongly advice to initialize the parameter in the object's constructor, using the setter method or the [SetParam](#) macro.

Example

```
{.cpp}
ParamGetter(width)
--> inline int width() const{return aParams["width"]};}
```

See also

[Param](#), [ParamSetter](#)

9.5.2.16 `#define ParamSetter(param, Param) inline void set##Param(int param##Value){SetParam(param,param##Value); touch();}`

The ParamSetter macro defines a generic setter method for the parameter named `param`.

With respect to the [name convention](#), this macro needs the parameter's name with lower and upper initial letter case.

Example

```
{.cpp}
ParamSetter(width,Width)
--> inline void setWidth(bool widthValue){aParams["width"] = widthValue;
touch();}
```

See also

[Param](#), [ParamGetter](#), [C](#)

9.5.2.17 `#define SetFlag(flag, value) aFlags[#flag] = value`

Convenient macro to set a flag directly.

This is usefull in custom setters, to avoid call loops.

Warning

The [touch](#) function isn't called. After this macro use, the [object](#) is no longer synchronised.

Example

```
{.cpp}
SetFlag(visible, false)
--> aFlags["visible"] = false
```

See also

[Flag](#), [FlagSetter](#), [object.h](#)

9.5.2.18 #define SetParam(param, value) aParams[#param] = value

Convenient macro to set a param directly.

This is usefull in custom setters, to avoid call loops.

Warning

The [touch](#) function isn't called. After this macro use, the [object](#) is no longer synchronised.

Example

```
{.cpp}
SetParam(width, 42)
--> aParams["width"] = 42
```

See also

[Param](#), [ParamSetter](#), [object.h](#)

9.6 src/editor/Game/xmlhandler.h File Reference

Definition og the [XmlHandler](#) class and other related classes to read XML game's files.

```
#include <QtXml> #include "game.h"
```

Classes

- class [XmlHandler](#)

Typedefs

- typedef std::pair< QString, FileContent > **Asso**

Enumerations

- enum **FileContent** { **FCUnknown**, **FCGame**, **FCRessources**, **FCWorld**, **FCMap**, **FCEntity**, **FCObject** }

Functions

- const QMap< QString, FileContent > **overHead** ({Asso("Game", FCGame), - Asso("Ressources", FCRessources), Asso("World", FCWorld), Asso("Map", FCMap), Asso("Entity", FCEntity), Asso("Object", FCObject)})

9.6.1 Detailed Description

Definition of the [XmlHandler](#) class and other related classes to read XML game's files.

9.7 src/editor/GUI/options.h File Reference

Definition of the [Options](#) class, and the constants that are used in this class.

```
#include <QSettings> #include <QDir> #include <QSize> ×
#include <QPoint> #include <QColor>
```

Classes

- struct [Options](#)

The [Options](#) class provides session-independent options and preferences.

Defines

- #define [WIN](#) "Window"
- #define [DIR](#) "Directories"
- #define [MAP](#) "MapsEditor"
- #define [DefaultF](#)(group, opt, val) defaultValues[group][opt] = QPair<QVariant, bool>(val, false)
- #define [Default](#)(group, opt, val) defaultValues[group][opt] = QPair<QVariant, bool>(val, true)

Variables

- const QString **ADAPT** = "Adjustable"
- const QString **VAL** = "Value"

9.7.1 Detailed Description

Definition of the [Options](#) class, and the constants that are used in this class. The headers of types which are used in the application must be include here. See [Options](#) for details.

Author

Baptiste Pauget

9.7.2 Define Documentation

9.7.2.1 `#define Default(group, opt, val) defaultValues[group][opt] = QPair<QVariant, bool>(val, true)`

This macro defines a new adaptati option identified by its group and name.

9.7.2.2 `#define DefaultF(group, opt, val) defaultValues[group][opt] = QPair<QVariant, bool>(val, false)`

This macro defines a new unadaptati option identified by its group and name.

9.7.2.3 `#define DIR "Directories"`

Group of paths options.

9.7.2.4 `#define MAP "MapsEditor"`

Group of [MapsEditor](#) related options.

9.7.2.5 `#define WIN "Window"`

Group of window related options.

9.8 src/editor/GUI/Tabs/bcolor.h File Reference

Definition of the [BColor](#) class.

```
#include <QtWidgets>
```

Classes

- class [BColor](#)

The [BColor](#) class is a simple frame that offers color selection.

9.8.1 Detailed Description

Definition of the [BColor](#) class.

Author

Baptiste Pauget

9.9 src/editor/GUI/Tabs/Docks/bdock.h File Reference

Definition of the [BDock](#) class.

```
#include <QtWidgets> #include "intertie.h" #include "bdockwidget.-  
h"
```

Classes

- class [BDock](#)

The [BDock](#) class is the container for widget to display in a [BDocksZone](#).

9.9.1 Detailed Description

Definition of the [BDock](#) class.