
INTERNET & WEB TECHNOLOGIES

Dr. Eric HITIMANA

Contents

- ~~• INTRODUCTION TO INTERNET AND WEB~~
- ~~• HTML~~
- **CSS**
- JavaScript
- ~~• PHP and MySQL (To be added if time allows)~~

CSS AGENDA

1. Introduction to CSS
2. CSS Syntax
3. How to insert a Style Sheet in HTML
4. Class vs ID Selector Identifications
5. Applying CSS to Different HTML Components
 - CSS Background
 - CSS Text
 - CSS Font
 - CSS Box
 - CSS List
 - CSS Table
6. CSS Navigations
7. CSS Layout Design
8. CSS Responsiveness

1.1 Introduction

- What is CSS?
 - **CSS** stands for **Cascading Style Sheets**
 - Styles define **how to display** HTML elements
 - Styles are normally stored in **Style Sheets**
 - Styles were added to HTML 4.0 **to solve styling problem**
 - Multiple style definitions will **cascade** into one

1.1 Introduction

- **Style save a lot of works?**
 - **External Style Sheets** can save a lot of work
 - External Style Sheets are stored in **CSS files**
 - Styles are normally saved in external **.css files**.
 - External style sheets enable you to change the **appearance and layout of all the pages in a Web site, just by editing one single CSS document!**

1.1 Introduction

- **Style sheets allow information to be specified in many ways**
 - Inside a HTML element.
 - Inside a head section of HTML page
 - In external CSS file
- **Tip:** Even multiple external style sheets can be referenced inside a single HTML document.

1.1 Introduction

- **Cascading Order**

- What style will be used when there is more than one style specified for an HTML element?
 - Inline style (inside an HTML element)
 - Internal style sheet (in the head section)
 - External style sheet
 - Browser default

CSS Syntax

- The CSS syntax is made up of three parts
 - A selector
 - A property
 - A value
- Syntax:
 - selector { property: value}**
 - Eg: **body {color:black}**

How to insert a Style Sheet

- When a browser reads a style sheet, it will format the document according to it.
- There are three ways of inserting a style sheet

a. External Style Sheet

```
<head>  
<link rel="stylesheet" type="text/css" href="mystyle.css" />  
</head>
```

- This document will be saved to **mystyle .css** format

```
hr {color:sienna}  
p {margin-left:20px}  
body {background-image:url("images/back40.gif")}
```

How to insert a Style Sheet

b. Internal Style Sheet

- An internal style sheet should be used when a single document has a unique style.
- You define internal styles in the head section by using the <style> tag.

• **Eg:**

```
<head>
<style type="text/css">
  hr {color:sienna}
  p {margin-left:20px}
  body {background-image:url("images/back40.gif")}
</style>
</head>
```

How to insert a Style Sheet

c. Inline Style

- An inline style loses many of the advantages of style sheets by mixing content with presentation.
- **Eg:**

```
<p style="color:sienna;margin-left:20px">This is a paragraph.</p>
```

How to insert a Style Sheet

- **Grouping**

- » You can group selectors.
- » Separate each selector with a comma.
- » In the example below we have grouped all the header elements. All header elements will be displayed in green text color:

» **Eg:**

```
h1,h2,h3,h4,h5,h6  
{  
  color:green  
}
```

How to insert a Style Sheet

- **The class selector**

- With the class selector you can define different styles for the same type of HTML element.
- Here is how you can do it with styles:

- Eg

```
p.right {text-align:right}  
p.center {text-align:center}
```

- You have to use class attribute in HTML document

```
<p class="right">This paragraph will be right-aligned.</p>  
<p class="center">This paragraph will be center-aligned.</p>
```

- To apply more than one class per given element, the syntax is

```
<p class="center bold">This is a paragraph.</p>
```

How to insert a Style Sheet

- **The id selector**

- You can also define styles for HTML elements with the id selector.
- The id selector is defined as a #.
- **Eg:** The style rule below will match the p element that has an id with a value of "para1"

```
p#para1
{
text-align:center;
color:red
}
```

Details

1. CSS Background(1)

- The CSS background properties define the background effects of an element.

Property	Description	Values	CSS
<u>background</u>	A shorthand property for setting all background properties in one declaration	<i>background-color</i> <i>background-image</i> <i>background-repeat</i> <i>background-attachment</i> <i>background-position</i>	1
<u>background-attachment</u>	Sets whether a background image is fixed or scrolls with	scroll fixed	1
<u>background-repeat</u>	Sets if/how a background image will be repeated	repeat repeat-x repeat-y no-repeat	1

Details

1. CSS Background(2)

- The CSS background properties define the background effects of an element.



<u>background-image</u>	Sets an image as the background	<u>url(URL)</u> none	1
<u>background-position</u>	Sets the starting position of a background image	top left top center top right center left center <u>center</u> center right bottom left bottom center bottom right <u>x% y%</u> <u>xpos ypos</u>	1
<u>background-repeat</u>	Sets if/how a background image will be repeated	repeat repeat-x repeat-y no-repeat	1

Details

1. CSS Background(3)-Example

- The CSS background properties define the background effects of an element.

```
<html>
<head>
<style type="text/css">
  body{background-color:yellow;}
  h1{background-color:#00ff00;}
  p{background-color:rgb(255,0,255);}
</style>
</head>

<body>
<h1>This is heading 1</h1>
<p>This is a paragraph.</p>
</body>
</html>
```

Details

2. CSS Text(1)

- **Text Color:** The color property is used to set the color of the text. The color can be set by:
 - **Name** – specify a color name, like “red”
 - **RGB** – specify an RGB value, like “rgb(255, 0,0)”
 - **Hex** – specify a hex value, like “#ff000”
 - **Example**

```
body {color:blue}  
h1 {color:#00ff00}  
h2 {color:rgb(255,0,0)}
```

Details

2. CSS Text(2)

- **Text Alignment:** The text-align property is used to set the horizontal alignment of a text
 - The text can be centered, or aligned to the left or right, or justified
 - **Example**

```
h1 {text-align:center}  
p.date {text-align:right}  
p.main {text-align:justify}
```

Details

2. CSS Text(3)

- **Text Decoration:** The text-decoration property is used to set or remove decorations from text.
 - It is mostly used to remove underlines from links for design purposes.
 - **Example**

```
a {text-decoration:none}  
h1 {text-decoration:overline}  
h2 {text-decoration:line-through}  
h3 {text-decoration:underline}  
h4 {text-decoration:blink}
```

Details

- All CSS Text Properties

Property	Description	Values	CSS
<u>color</u>	Sets the color of a text	<i>color</i>	1
<u>direction</u>	Sets the text direction	<u>ltr</u> <u>rtl</u>	2
<u>line-height</u>	Sets the distance between lines	normal <i>number</i> <i>length</i> %	1
<u>letter-spacing</u>	Increase or decrease the space between characters	normal <i>length</i>	1
<u>text-align</u>	Aligns the text in an element	left right	1

Details

- All CSS Text Properties

<u>text-decoration</u>	Adds decoration to text	none underline <u>overline</u> line-through blink	1
<u>text-indent</u>	Indents the first line of text in an element	<i>length</i> %	1
text-shadow		none <i>color</i> <i>length</i>	
<u>text-transform</u>	Controls the letters in an element	none capitalize uppercase lowercase	1
<u>unicode-bidi</u>		normal embed <u>bidirectional-override</u>	2

Details

3. CSS Font

- CSS font properties defines the font family, boldness, size, and the style of a text.
 - Difference between **Sans-serif** and **serif**



- On computer screens, sans-serif fonts are considered easier to read than serif fonts.

Details

3. CSS Font

Generic family	Font family	Description
Serif	Times New Roman Georgia	Serif fonts have small lines at the ends on some characters
Sans-serif	Arial Verdana	"Sans" means without - these fonts do not have the lines at the ends of characters
<u>Monospace</u>	Courier New Lucida Console	All <u>monospace</u> characters has the same width

Details

3. All CSS Font Properties

Property	Description	Values	CSS
<u>font</u>	Sets all the font properties in one declaration	<i>font-style</i> <i>font-variant</i> <i>font-weight</i> <i>font-size/line-height</i> <i>font-family</i> caption icon menu message-box small-caption status-bar inherit	1
<u>font-family</u>	Specifies the font family for text	<i>family-name</i> <i>generic-family</i> inherit	1

Details

3. All CSS Font Properties

<u>font-size</u>	Specifies the font size of text	xx-small x-small small medium large x-large xx-large smaller larger <i>length</i> % inherit	1
<u>font-style</u>	Specifies the font style for text	normal italic oblique	1

- E.g

```
p{font-family:"Times New Roman",Georgia,Serif}  
p.normal {font-style:normal}  
p.italic {font-style:italic}  
p.oblique {font-style:oblique}
```

Details

4. CSS Box Model

- All HTML elements can be considered as boxes.
- In CSS, the term box model is used when talking about design and layout.
- The box model illustrates how the CSS properties: margin, border, and padding, affects the widths and height of an element



Details

4. CSS Box Model

- CSS Border

- The CSS border properties define the borders around an element

- Border-style values:

- » none: Defines no border

- » dotted: Defines a dotted border

- » dashed: Defines a dashed border

- » double: Defines two borders. The width of the two borders are the same as the border-width value

- » groove: Defines a 3D grooved border. The effect depends on the border-color value

- » outset: Defines a 3D outset border. The effect depends on the border-color value

Details

4. CSS Box Model

```
<html>
  <head>
    <style type="text/css">
      p.none {border-style:none}
      p.dotted {border-style:dotted}
      p.dashed {border-style:dashed}
      p.solid {border-style:solid}
      p.double {border-style:double}
      p.groove {border-style:groove}
      p.ridge {border-style:ridge}
      p.inset {border-style:inset}
      p.outset {border-style:outset}
      p.hidden {border-style:hidden}
    </style>
  </head>
```

```
•
  <body>
    <p class="none">No border.</p>
    <p class="dotted">A dotted border.</p>
    <p class="dashed">A dashed border.</p>
    <p class="solid">A solid border.</p>
    <p class="double">A double border.</p>
    <p class="groove">A groove border.</p>
    <p class="ridge">A ridge border.</p>
    <p class="inset">An inset border.</p>
    <p class="outset">An outset border.</p>
    <p class="hidden">A hidden border.</p>
  </body>

</html>
```

Details

5. CSS List

- The CSS list properties allow you to place the list item marker, change between different list item markers, or set an image as the list item marker.
- We have: **Ordered List**, and **Unordered List**
- Example:

```
ul.circle {list-style-type:circle}  
ul.square {list-style-type:square}  
  
ol.upper-roman {list-style-type:upper-roman}  
ol.lower-alpha {list-style-type:lower-alpha}
```

Details

5. CSS List



- Using an Image as List Marker

```
ul
{
list-style-image:url('arrow.gif');
}
```

- ✚ The example above will not show the exact same result in all browsers. IE and Opera will display the images slightly higher than in Firefox, Chrome, and Safari.

Details

5. CSS List

- For the same result in all browsers, you will have to use a background image on each list item.
- However, there is a way to position the image more precisely.

```
ul
{
  list-style-type:none;
  padding:0px;
  margin:0px;
}
li
{
  background-image:url(arrow.gif);
  background-repeat:no-repeat;
  background-position:0px 5px;
  padding-left:14px;
}
```


Details

5. CSS Table

- The CSS table properties allow you to set the layout of a table
- Some properties

Property	Description	Values
<u>border-collapse</u>	Sets whether the table borders are collapsed into a single border or detached as in standard HTML	collapse separate
<u>border-spacing</u>	Sets the distance that separates cell borders (only for the "separated borders" model)	<i>length</i> <u><i>length</i></u>
<u>caption-side</u>	Sets the position of the table caption	top bottom left right
<u>empty-cells</u>	Sets whether or not to show empty cells in a	show hide

Details

5. CSS Table

```
<html>
<head>
<style type="text/css">
  table.ex1 {table-layout:auto}
  table.ex2 {table-layout:fixed}
</style>
</head>

<body>
<table class="ex1" border="1"
width="100%">
<tr>
<td width="5%">1000</td>
<td width="95%">10000000</td>
</tr>
</table>
```

```
<br />
<table class="ex2" border="1"
width="100%">
<tr>
<td width="5%">10000</td>
<td width="95%">10000000</td>
</tr>
</table>

</body>
</html>
```


End

- Example

Results



Results

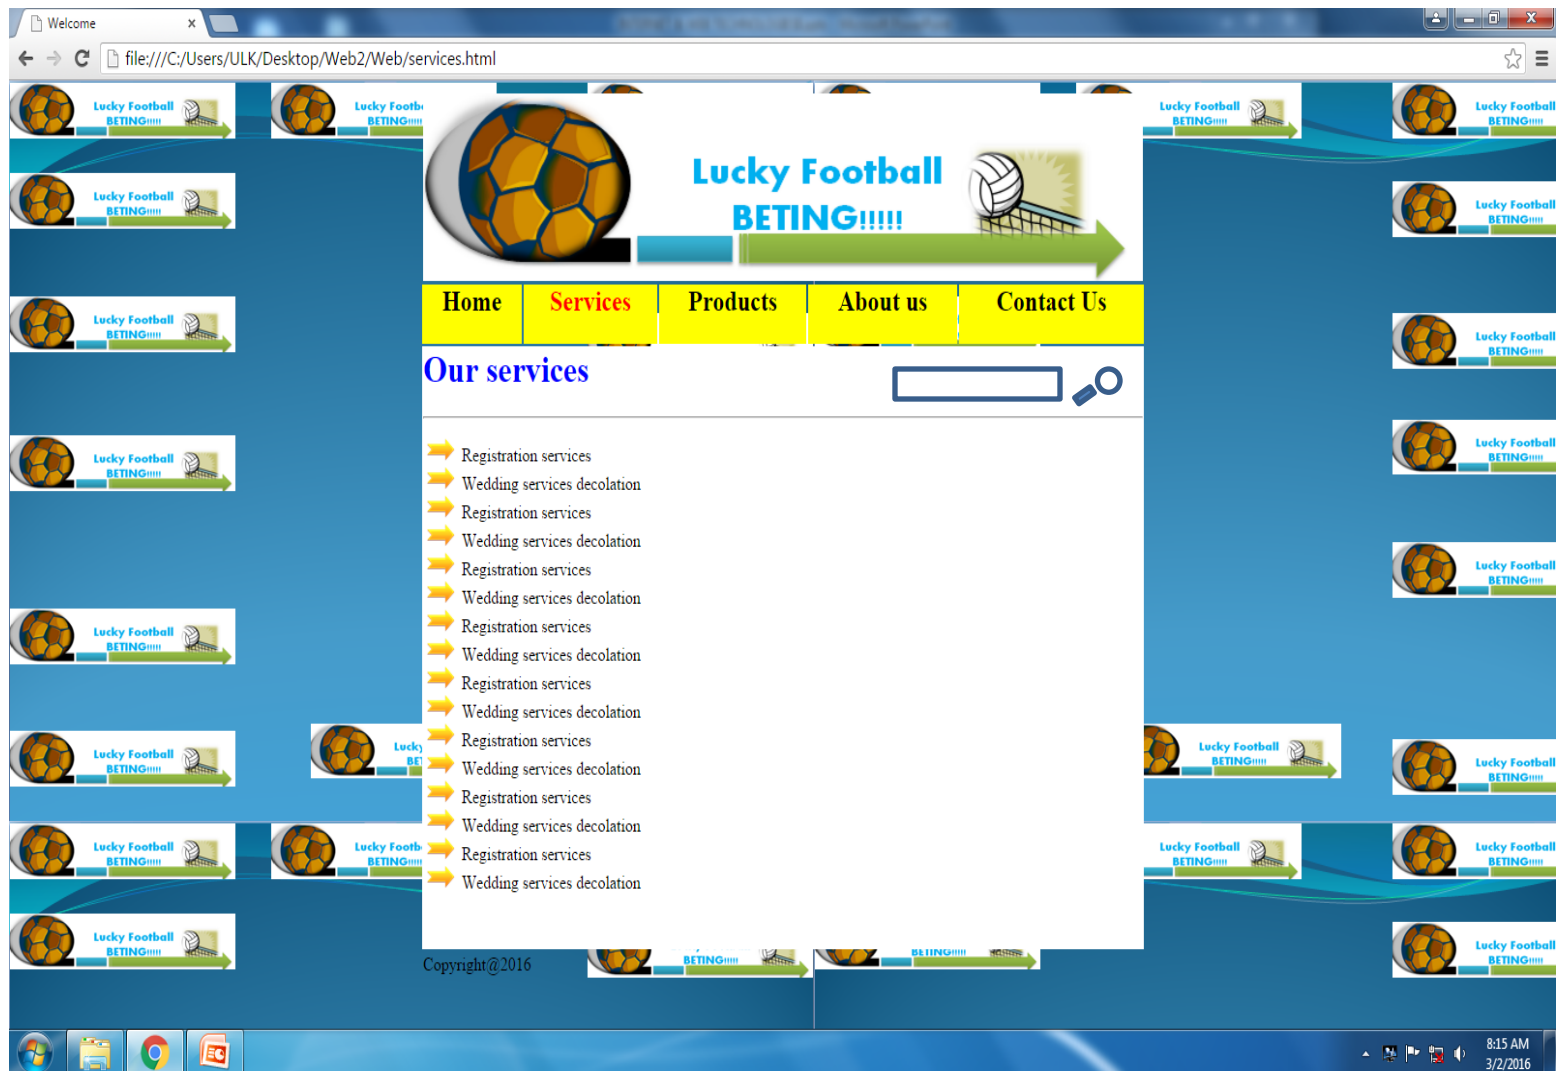

Results



file:///C:/Users/ULK/Desktop/Web2/Web/products.html

Lucky Football BETING!!!!!!

Home Services **Products** About us Contact Us

Our products

S/N	Item name	Date
1	Computer	12/02/2000
2	Television	12/02/2001
3	AC	12/02/2002
4	Cars	12/02/2013
5	Books	12/02/2011
6	Bricks	12/02/2012
7	Blocks	12/02/2013
8	Web design	12/02/2014

Copyright@2016

8:16 AM
3/2/2016

Results



Results

Welcome x

file:///C:/Users/ULK/Desktop/Web2/Web/contact.html

Lucky Football BETING!!!!

Home Services Products About us **Contact Us**

Contact Us

First name:

Last name:

Gender: ☐ Male ☐ Female

Languages spoken

☐ English

☐ French

☐ Kinyarwanda

☐ Others

Department:

Your comment:

Copyright@2016

8:17 AM
3/2/2016