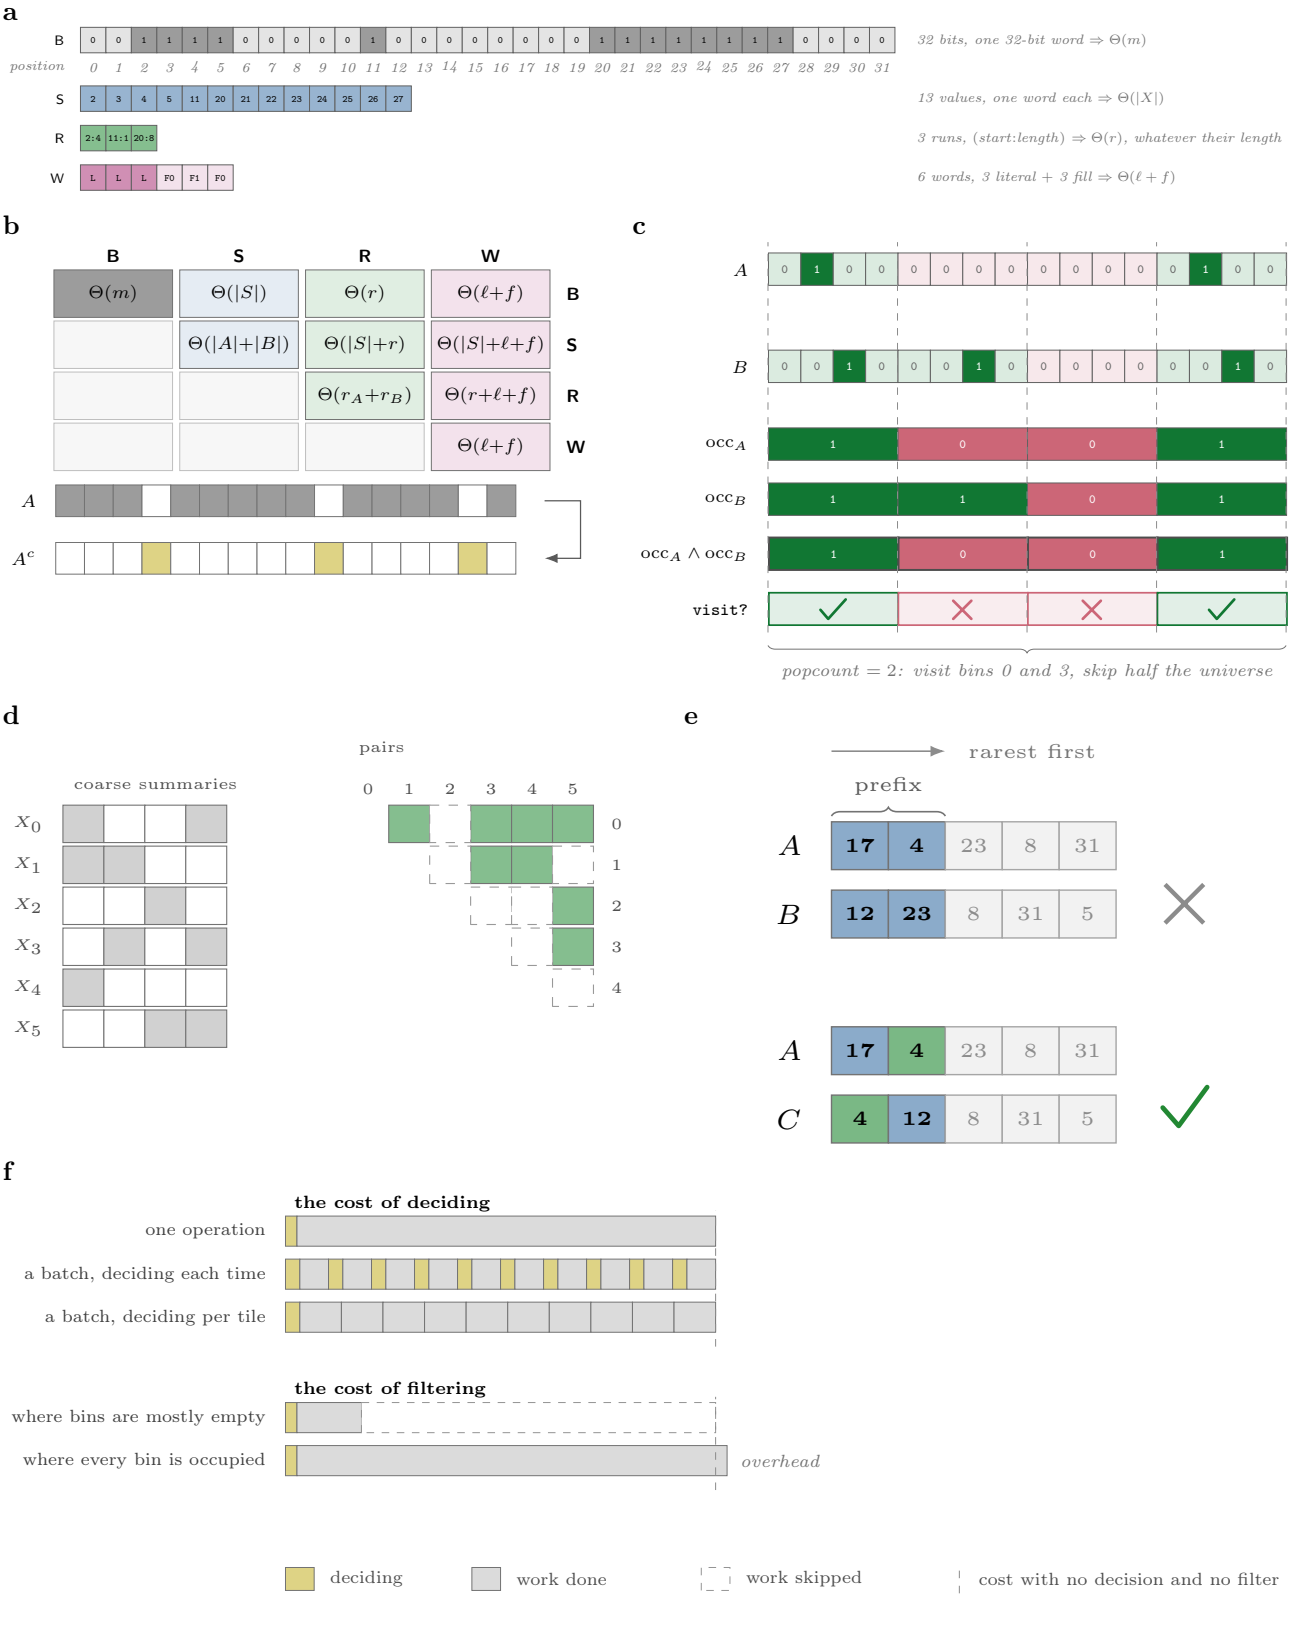

a
B
position
S
R
W
32 bits, one 32-bit word ⇒ Θ(m)
13 values, one word each ⇒ Θ(|X|)
3 runs, (start:length) ⇒ Θ(r), whatever their length
6 words, 3 literal + 3 fill ⇒ Θ(ℓ + f)
b
B
S
R
W
Θ(m)
Θ(|S|)
Θ(r)
Θ(ℓ+f)
Θ(|A|+|B|)
Θ(|S|+r)
Θ(|S|+ℓ+f)
Θ(r_A+r_B)
Θ(r+ℓ+f)
A
A^c
c
A
B
occ_A
occ_B
occ_A ∧ occ_B
visit?
popcount = 2: visit bins 0 and 3, skip half the universe
d
coarse summaries
pairs
X_0
X_1
X_2
X_3
X_4
X_5
e
rarest first
prefix
A
B
C
f
the cost of deciding
one operation
a batch, deciding each time
a batch, deciding per tile
the cost of filtering
where bins are mostly empty
where every bin is occupied
overhead
deciding
work done
work skipped
cost with no decision and no filter