


Realistic View

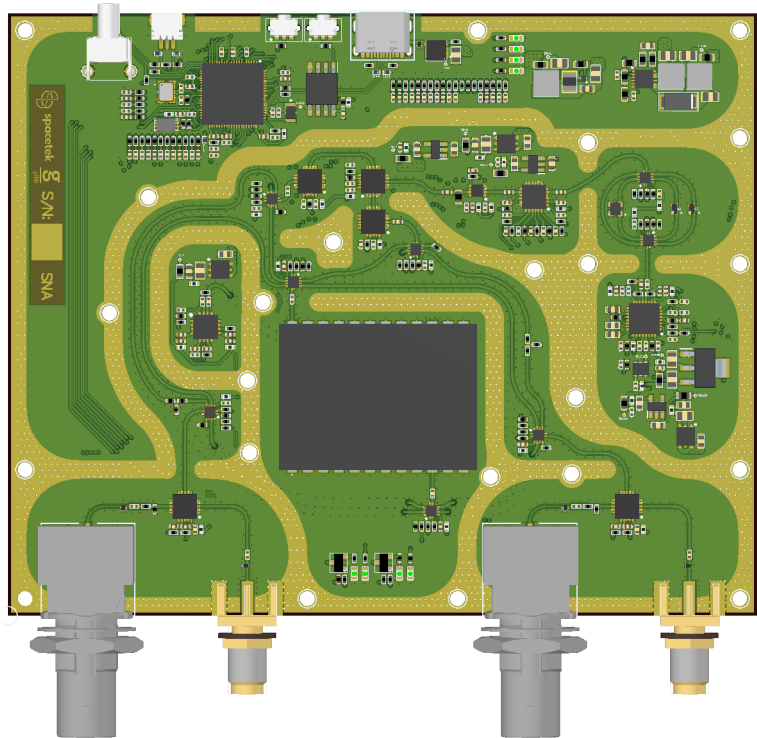

Layer Stack Legend

Material	Layer	Thickness	Dielectric Material	Type	Gerber
Surface Material	Top Solder 1	0.01mm	Solder Resist	Solder Mask	GTS
Copper	L1 Top Layer	0.04mm		Signal	GTL
Prepreg		0.21mm	Prepreg	Dielectric	
Copper	L2 Inner 1	0.02mm		Signal	G1
Core		1.06mm	FR4	Dielectric	
Copper	L3 Inner 2	0.02mm		Signal	G2
Prepreg		0.21mm	Prepreg	Dielectric	
Copper	L4 Bottom Layer	0.04mm		Signal	GBL
Surface Material	Bottom Solder 1	0.01mm	Solder Resist	Solder Mask	GBS
Total thickness: 1.61mm					

Transmission Line Structure Table

Impedance Id	Transmission Line	Target Impedance	Calculated Impedance	Trace layer	Wide Trace Width	Narrow Trace Width	Reference layers	Substack	Clearance	Target Tolerance
1	Coated Coplanar Waveguide With Ground	50	49.55	L1 Top Layer	0.32mm	0.32mm	L2 Inner 1	Board Layer Stack	0.25mm	10%
2	Coated Coplanar Waveguide With Ground	75	75.71	L1 Top Layer	0.13mm	0.13mm	L2 Inner 1	Board Layer Stack	0.38mm	10%
3	Diff Coated Coplanar Waveguide With Ground	90	90.92	L1 Top Layer	0.23mm	0.23mm	L2 Inner 1	Board Layer Stack	0.18mm	10%
4	Coated Coplanar Waveguide With Ground	50	49.55	L4 Bottom Layer	0.32mm	0.32mm	L3 Inner 2	Board Layer Stack	0.25mm	10%
5	Coated Coplanar Waveguide With Ground	75	75.71	L4 Bottom Layer	0.13mm	0.13mm	L3 Inner 2	Board Layer Stack	0.38mm	10%
6	Diff Coated Coplanar Waveguide With Ground	90	89.99	L4 Bottom Layer	0.19mm	0.19mm	L3 Inner 2	Board Layer Stack	0.13mm	10%

VERTRAULICH CONFIDENTIAL Copyright by Spacetek Technology AG. Für dieses Dokument behalten wir uns alle Rechte vor. We reserve all rights in respect of this document.

Spacetek Technology AG | Gibb

Spacetek, Gümligen

Gibb, Bern



Project: **SNA**

Board: **SNA**

Page: **HW Docs**

File: <https://github.com/ml3rc/SNA.git>

Number: **SNA**

Variant: **EMS**

Release: **03.09.2026**

Sheet **1** of **1**

Size: **A3**

Git: **14ffb109** [Modifi

Version: **1.0**

Design: **ML**

Check: **ML**

SNA.PCBDwf