Čas: 07 i 08

RAČUNARSKE I VEB PREZENTACIJE

Nastavnik: Mladen Janković

Tema: HTML - tabele


w3schools.com

Primjer tabele

Company	Contact	Country
Alfreds Futterkiste	Maria Anders	Germany
Centro comercial Moctezuma	Francisco Chang	Mexico
Ernst Handel	Roland Mendel	Austria
Island Trading	Helen Bennett	UK
Laughing Bacchus Winecellars	Yoshi Tannamuri	Canada
Magazzini Alimentari Riuniti	Giovanni Rovelli	Italy

Elementi za dodavanje tabele

- <table> - oznaka za tabelu
- <tr> - oznaka za red
- <th> - oznaka za ćeliju/polje zaglavlja tabeli
- <td> - oznaka za ćeliju/polje u jednom redu tabele
- <caption> naslov ili natpis tabele

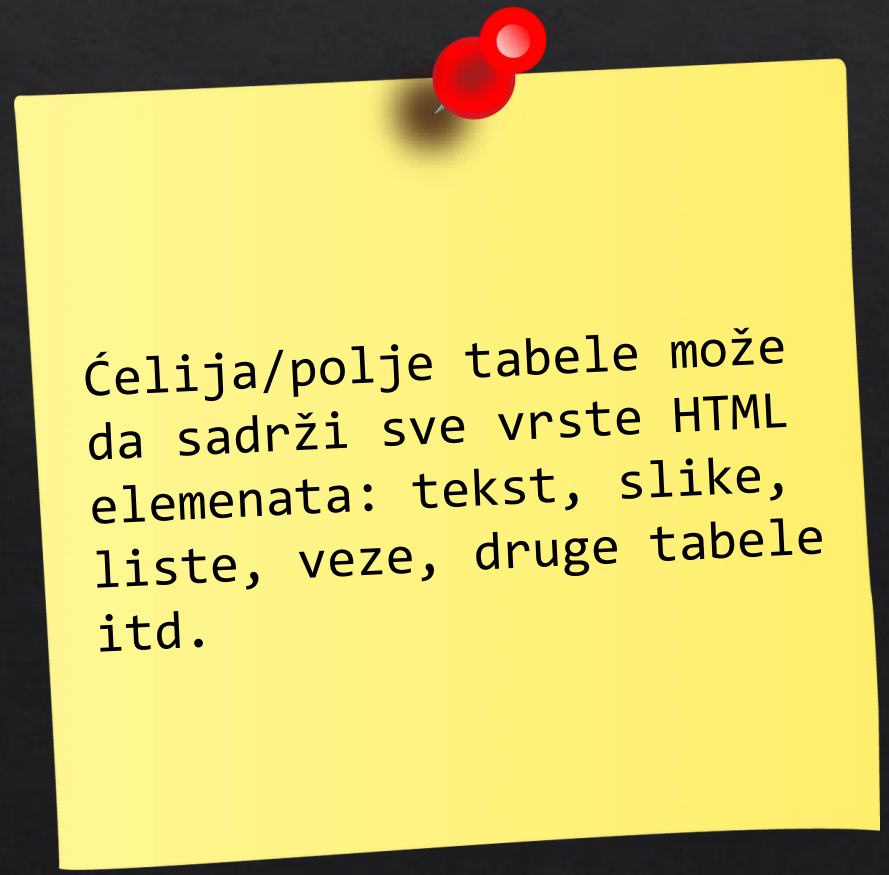

```html
<!DOCTYPE html>
<html>

<body>

<h2>A basic HTML table</h2>

<table>
<caption>Table</caption>
  <tr>
    <th>Company</th>
    <th>Contact</th>
    <th>Country</th>
  </tr>
  <tr>
    <td>Alfreds Futterkiste</td>
    <td>Maria Anders</td>
    <td>Germany</td>
  </tr>
  <tr>
    <td>Centro comercial Moctezuma</td>
    <td>Francisco Chang</td>
    <td>Mexico</td>
  </tr>
</table>

<p>To understand the example better, we have added borders to the table.</p>

</body>
</html>
```

A basic HTML table

Table

Company	Contact	Country
Alfreds Futterkiste	Maria Anders	Germany
Centro comercial Moctezuma	Francisco Chang	Mexico

To understand the example better, we have added borders to the table.

Atribut border

```
<!DOCTYPE html>
<html>


<body>

<h2>A basic HTML table</h2>

<table border="1">
  <tr>
    <th>Company</th>
    <th>Contact</th>
    <th>Country</th>
  </tr>
  <tr>
    <td>Alfreds Futterkiste</td>
    <td>Maria Anders</td>
    <td>Germany</td>
  </tr>
  <tr>
    <td>Centro comercial Moctezuma</td>
    <td>Francisco Chang</td>
    <td>Mexico</td>
  </tr>
</table>

<p>To understand the example better, we have added borders to the table.</p>

</body>
</html>
```

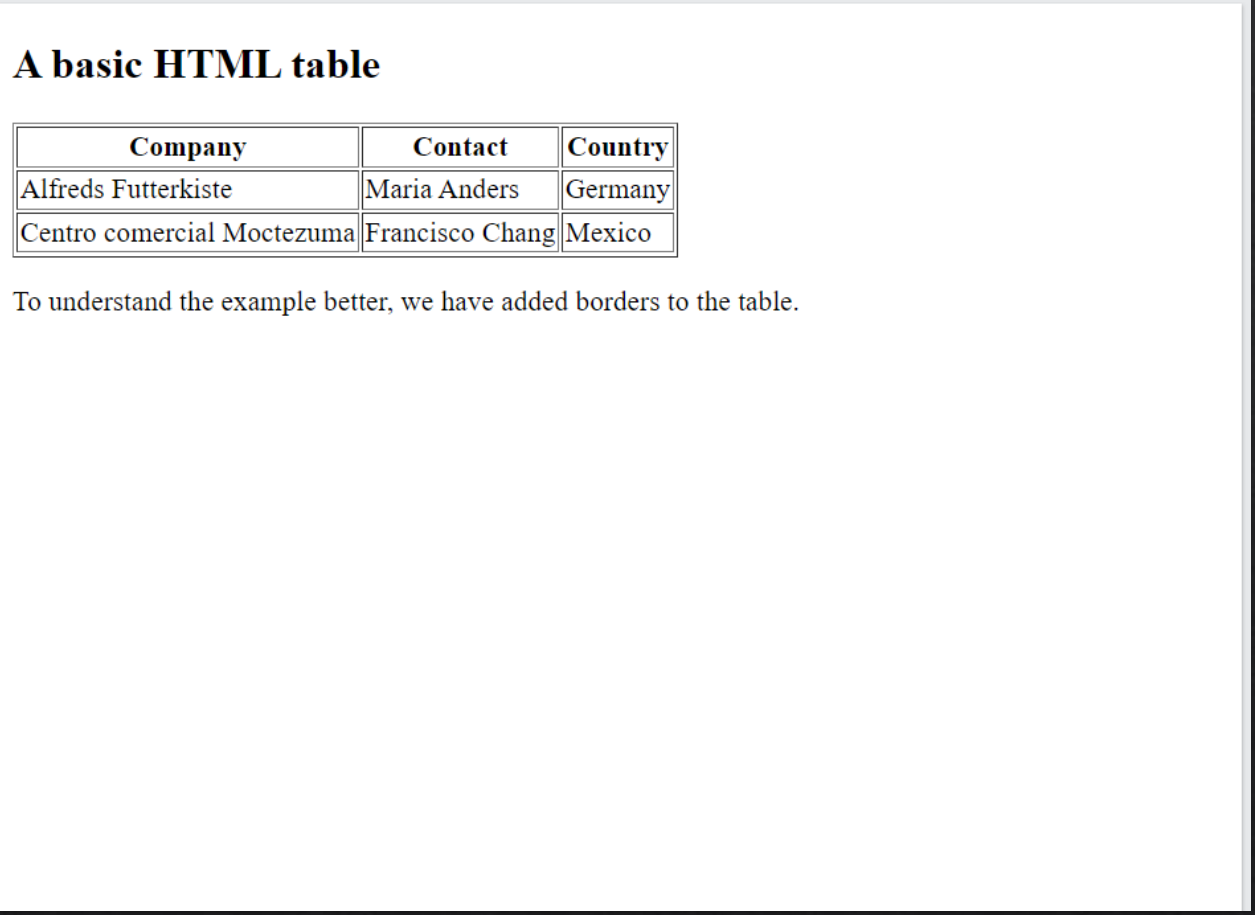

A basic HTML table

Company	Contact	Country
Alfreds Futterkiste	Maria Anders	Germany
Centro comercial Moctezuma	Francisco Chang	Mexico

To understand the example better, we have added borders to the table.

Zadavanje stilova pomoću oznake <style>

- U head dio se dodaje oznaka
- Navode se elementi na koje se primjenjuje stil
- Može se na više elemenata primjeniti jedan stil

```
<!DOCTYPE html>
<html>
<head>
<style>
table {
  font-family: arial, sans-serif;
  border-collapse: collapse;
  width: 100%;
}

td, th {
  border: 1px solid #dddddd;
  text-align: left;
  padding: 8px;
}

tr:nth-child(even) {
  background-color: #dddddd;
}
</style>
</head>
<body>

<h2>HTML Table</h2>

<table>
  <tr>
    <th>Company</th>
    <th>Contact</th>
    <th>Country</th>
  </tr>
  <tr>
    <td>Alfreds Futterkiste</td>
    <td>Maria Anders</td>
    <td>Germany</td>
  </tr>
  <tr>
    <td>Centro comercial Moctezuma</td>
```

HTML Table

Company	Contact	Country
Alfreds Futterkiste	Maria Anders	Germany
Centro comercial Moctezuma	Francisco Chang	Mexico
Ernst Handel	Roland Mendel	Austria
Island Trading	Helen Bennett	UK
	Yannamuri	Canada
	ni Rovelli	Italy

```
<html>
<head>
<style>
table {
  font-family: arial, sans-serif;
  border-collapse: collapse;
  width: 100%;
}

td, th {
  border: 1px solid #dddddd;
  text-align: left;
  padding: 8px;
}

tr:nth-child(even) {
  background-color: #dddddd;
}
</style>
</head>
<body>
```

Stilovi za ivicu tabele

```
table, th, td {
  border: 1px solid black;
}
```

Firstname	Lastname	Age
Jill	Smith	50
Eve	Jackson	94
John	Doe	80

Uklanjanje razmanka između polja

```
table, th, td {
  border: 1px solid black;
  border-collapse: collapse;
}
```

Firstname	Lastname	Age
Jill	Smith	50
Eve	Jackson	94
John	Doe	80

Boja polja

```
table, th, td {
  border: 1px solid black;
  border-collapse: collapse;
}
th, td {
  background-color: #96D4D4;
}
```

Firstname	Lastname	Age
Jill	Smith	50
Eve	Jackson	94
John	Doe	80

Zaobljavanje ivica polja

```
table, th, td {
  border: 1px solid black;
  border-radius: 10px;  <!-- Povećavanjem broja povećava se i
                            zaobljavanje, mogu i procenti umjesto
                            piksela -->
}
```

Firstname	Lastname	Age
Jill	Smith	50
Eve	Jackson	94
John	Doe	80

```
th, td {  <!-- bez table  -->
  border: 1px solid black;
  border-radius: 10px;
}
```

Firstname	Lastname	Age
Jill	Smith	50
Eve	Jackson	94
John	Doe	80

border-style – stil za mijenjanje vrste tabele

- dotted
- dashed
- solid
- double
- groove
- ridge
- inset
- outset
- none
- hidden

```
th, td {
  border-style: dotted;
}
```

Firstname	Lastname	Age
Jill	Smith	50
Eve	Jackson	94
John	Doe	80

border-color – za mijenjanje boje ivice

```
th, td {
  border-style:solid;
  border-color: #96D4D4;
}
```

Firstname	Lastname	Age
Jill	Smith	50
Eve	Jackson	94
John	Doe	80

width – za postavljanje širine tabele

```
table{
  width: 100%; <!-- zauzima 100% širine elementa u kom se nalazi -->
}
```

Ukoliko želimo da zadamo širinu samo neke kolone ili visinu nekog reda onda to (za sad) radimo tako šro direktno u th ili tr zadamo stil.

```
<th style="width:70%">
<tr style="height:200px">
```

text-align – za poravnanje teksta

```
th {
  text-align: left; <!-- imate i druge opcije, uz desnu ivicu,
                         centrirano -->
}
```

Stilovi za podešavanje margina u samom polju

```
table, th, td {
  border: 1px solid black;
  border-collapse: collapse;
}
th, td {
  padding-top: 10px;
  padding-bottom: 20px;
  padding-left: 30px;
  padding-right: 40px;
}
```

Firstname	Lastname	Age
Jill	Smith	50
Eve	Jackson	94
John	Doe	80

Stil za podešavanje prostora između polja

```
table, th, td {
  border: 1px solid black;
}
table {
  border-spacing: 30px;
}
```

Firstname	Lastname	Age
Jill	Smith	50
Eve	Jackson	94
John	Doe	80

atribut colspan – spaja polja po kolonama

```
<!DOCTYPE html>
<html>
<head>
<style>
table, th, td {
  border: 1px solid black;
  border-collapse: collapse;
}
</style>
</head>
<body>

<h2>A header that spans two columns</h2>

<p>Use the colspan attribute to have a header span over multiple col

<table style="width:100%">
  <tr>
    <th colspan="2">Name</th>
    <th>Age</th>
  </tr>
  <tr>
    <td>Jill</td>
    <td>Smith</td>
    <td>50</td>
  </tr>
  <tr>
    <td>Eve</td>
    <td>Jackson</td>
    <td>94</td>
  </tr>
</table>
</body>
</html>
```

A header that spans two columns

Use the colspan attribute to have a header span over multiple columns.

Name		Age
Jill	Smith	50
Eve	Jackson	94

```
<p>Use the colspan attribute to hav

<table style="width:100%">
  <tr>
    <th colspan="2">Name</th>
    <th>Age</th>
  </tr>
  <tr>
    <td>Jill</td>
```

atribut rowspan – spaja polja po redovima

```
<!DOCTYPE html>
<html>
<head>
<style>
table, th, td {
  border: 1px solid black;
  border-collapse: collapse;
}
</style>
</head>
<body>

<h2>Cell that spans two rows</h2>
<p>To make a cell span more than one row, use the rowspan attribute.</p>

<table style="width:100%">
  <tr>
    <th>Name</th>
    <td>Jill</td>
  </tr>
  <tr>
    <th rowspan="2">Phone</th>
    <td>555-1234</td>
  </tr>
  <tr>
    <td>555-8745</td>
  </tr>
</table>
</body>
</html>
```

Cell that spans two rows

To make a cell span more than one row, use the rowspan attribute.

Name	Jill
Phone	555-1234
	555-8745

```
    <td>Jill</td>
  </tr>
  <tr>
    <th rowspan="2">Phone</th>
    <td>555-1234</td>
  </tr>
  <tr>
```

```
table {
  border-collapse: collapse;
  width: 100%;
}

th, td {
  text-align: left;
  padding: 8px;
}

tr:nth-child(even) {<!-- primjenjuje stil na svaki parni red -->
  background-color: #D6EEEE;
}
```

First Name	Last Name	Points
Peter	Griffin	$100
Lois	Griffin	$150
Joe	Swanson	$300
Cleveland	Brown	$250

```
table, th, td {
  border: 1px solid black;
  border-collapse: collapse;
}

th:nth-child(odd),td:nth-child(odd) { <!-- primjenjuje stil na svaku neparnu
                                          kolonu -->
  background-color: #D6EEEE;
}
```

MON	TUE	WED	THU	FRI	SAT	SUN

Primjeri primjene stilova

```
table {
  border-collapse: collapse;
  width: 100%;
}

tr {
  border-bottom: 1px solid #ddd;
}
```

Firstname	Lastname	Savings
Peter	Griffin	$100
Lois	Griffin	$150
Joe	Swanson	$300
Cleveland	Brown	$250

Primjenjuje stil samo na redu koji je se nalazi ispod kursora miša - HOVER

```
table {
  border-collapse: collapse;
  width: 100%;
}
th, td {
  padding: 8px;
  text-align: left;
  border-bottom: 1px solid #DDD;
}
tr:hover {
background-color: #D6EEEE;
}
```

First Name	Last Name	Points
Peter	Griffin	$100
Lois	Griffin	$150
Joe	Swanson	$300
Cleveland	Brown	$250

Domaći

- Pored stranica iz prethodnih domaćih (index.html, o_temi.html, galerija.html, mapa.html) treba dodati dodati stranicu tabela.html. Na početku svake stranice stoje linkovi ka ostalim stranicama (neka vrsta menija za vaš sajt) i sve stranice u tabu (kartici) pretraživača moraju da imaju ime i prezime učenika i ikonicu koja je vezana za temu
- tabela.html sadrži
  - barem jednu tabelu vezanu za vašu temu sa primjenjenim stilovima
  - Mora da bude dodat stil tako da je svaki drugi red iste boje a da se dva uzastopna reda razlikuju, takođe dodati efekat da prilikom prelaska preko reda taj red dobije drugačiju boju od ostalih redova a da polje preko kojeg se pređe ima drugačiju boju od ostalih polja