Čas: 03 i 04

RAČUNARSKE I VEB PREZENTACIJE


Nastavnik: Mladen Janković

Tema: HTML element – dodavanje naslova, paragrafa, linkova, slika

w3schools.com

Osnovni koncepti

- Tagovi
  - Otvarajući i zatvarajući
  - Osnovni gradivni elementi
- Atributi
  - Osobine tagova
  - Veličina, boja, font itd
- Elementi
  - Kombinacija otvorenih tagova, zatvorenih tagova i atributa

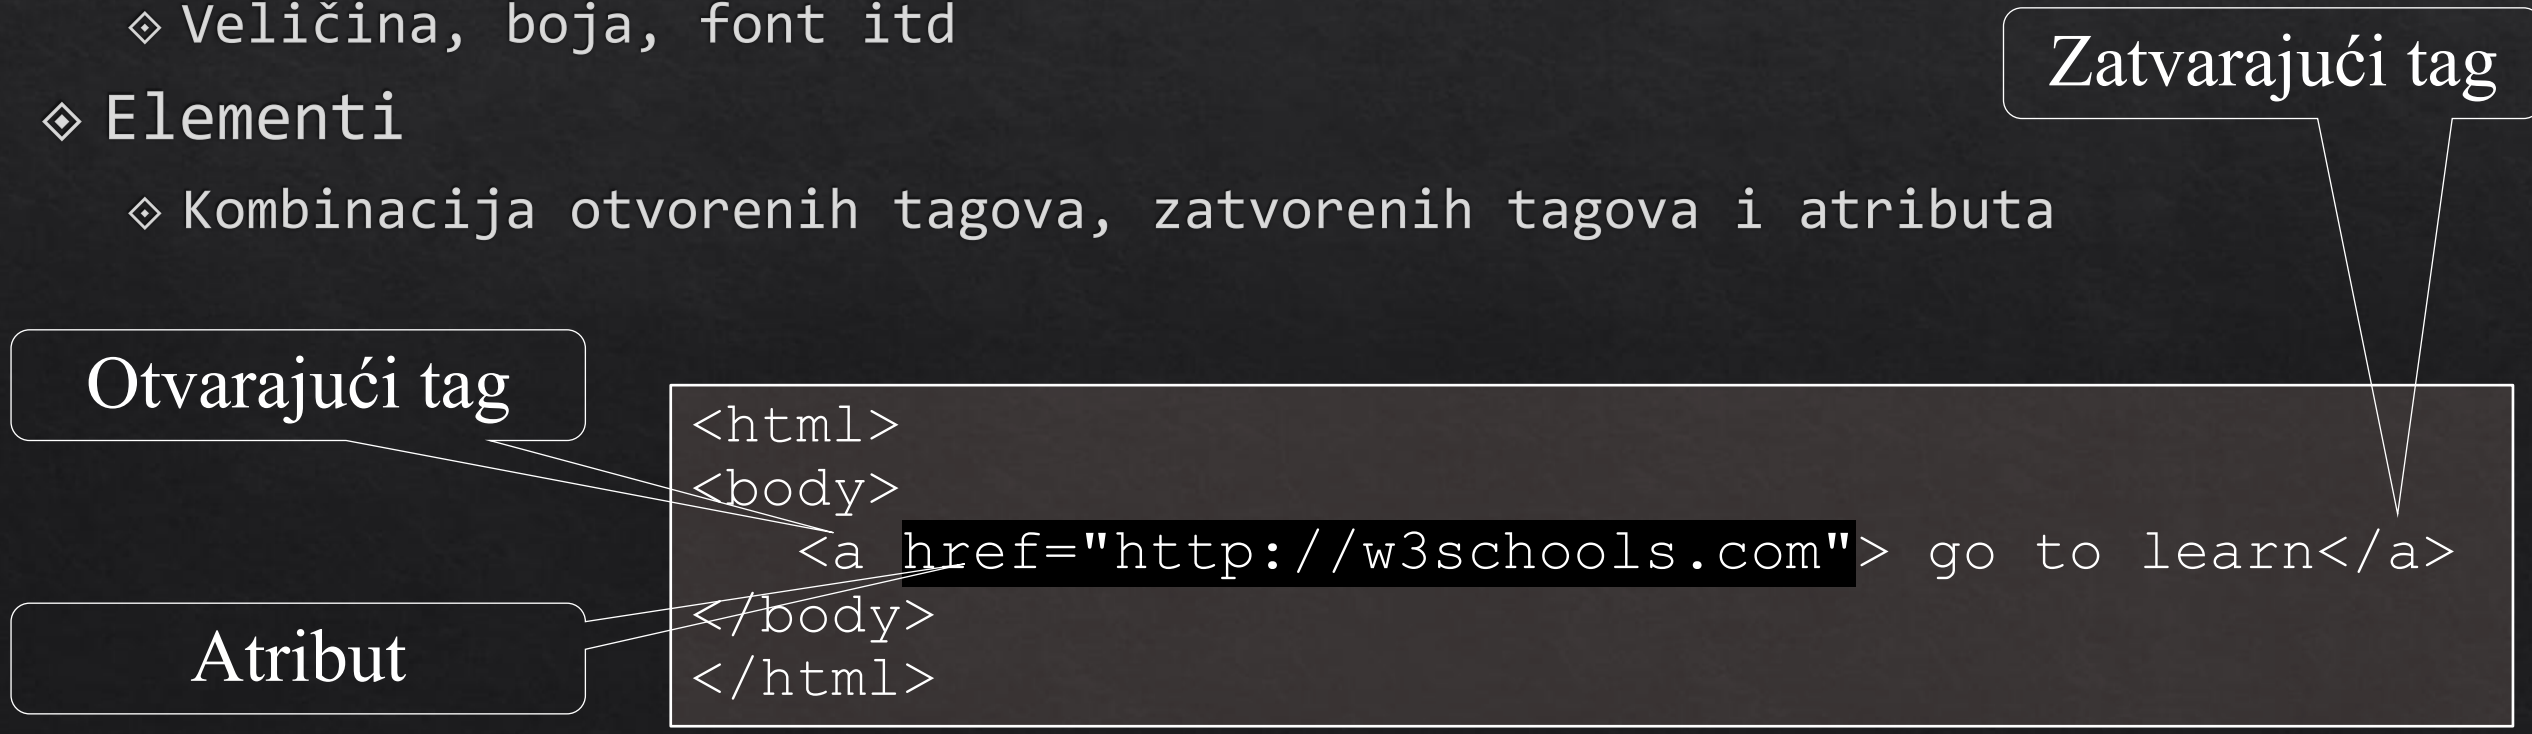

Struktura HTML stranice

```
<html>
<head>
<title>Page title</title>
</head>
<body>
<h1>This is a heading</h1>
<p>This is a paragraph.</p>
<p>This is another paragraph.</p>
</body>
</html>
```

HTML Headings


- HTML headings su naslovi ili podnaslovi koje želite da prikažete na veb stranici.
- HTML headings su definisani sa oznakama <h1> do <h6>.
- <h1> definiše najvažniji naslov. <h6> definiše najmanje važan naslov.

Pregledači automatski dodaju malo razmaka (margina) prije i poslije naslova.
Koristite HTML headings samo za naslove. Nemojte koristiti headings elemente da biste tekst učinili VELIKIM ili **podebljanim.**

```
<!DOCTYPE html>
<html>
<body>

<h1>Heading 1</h1>
<h2>Heading 2</h2>
<h3>Heading 3</h3>
<h4>Heading 4</h4>
<h5>Heading 5</h5>
<h6>Heading 6</h6>

</body>
</html>
```

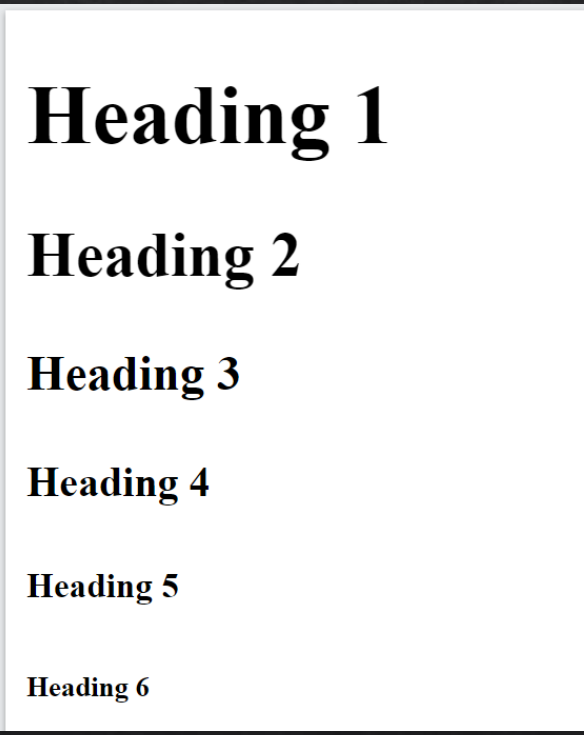

Headings elementi su važni

- Pretraživači koriste naslove za indeksiranje strukture i sadržaja vaših veb stranica.
- Korisnici često pregledaju stranicu prema njenim naslovima. Važno je koristiti naslove za prikaz strukture dokumenta.
- Element <h1> treba koristiti za glavne naslove, zatim naslove <h2>, zatim manje važne <h3> i tako dalje.

<p> element

- HTML <p> element definiše paragraf ili pasus.
- Paragraf uvek počinje u novom redu, a pretraživači automatski dodaju razmak (marginu) prije i poslije paragrafa.
- Sa HTML-om, ne možete da promjenite prikaz dodavanjem dodatnih razmaka ili dodatnih redova u vaš HTML kod.
- Pregledač će automatski ukloniti sve dodatne razmake i redove kada se stranica prikaže

```
<!DOCTYPE html>
<html>
<body>

<p>
This paragraph
contains a lot of lines
in the source code,
but the browser
ignores it.
</p>

<p>
This paragraph
contains      a lot of spaces
in the source     code,
but the    browser
ignores it.
</p>

<p>
The number of lines in a paragraph depends on the size of the browser
window. If you resize the browser window, the number of lines in this
paragraph will change.
</p>

</body>
</html>
```

This paragraph contains a lot of lines in the source code, but the browser ignores it.

This paragraph contains a lot of spaces in the source code, but the browser ignores it.

The number of lines in a paragraph depends on the size of the browser window. If you resize the browser window, the number of lines in this paragraph will change.

<hr> element

- Oznaka <hr> definiše tematski prelom na HTML stranici i najčešće se prikazuje kao horizontalna linija.
- Element <hr> se koristi za odvajanje sadržaja (ili definisanje promene) na HTML stranici


```
<!DOCTYPE html>
<html>
<body>

<h1>This is heading 1</h1>
<p>This is some text.</p>
<hr>

<h2>This is heading 2</h2>
<p>This is some other text.</p>
<hr>

<h2>This is heading 2</h2>
<p>This is some other text.</p>

</body>
</html>
```

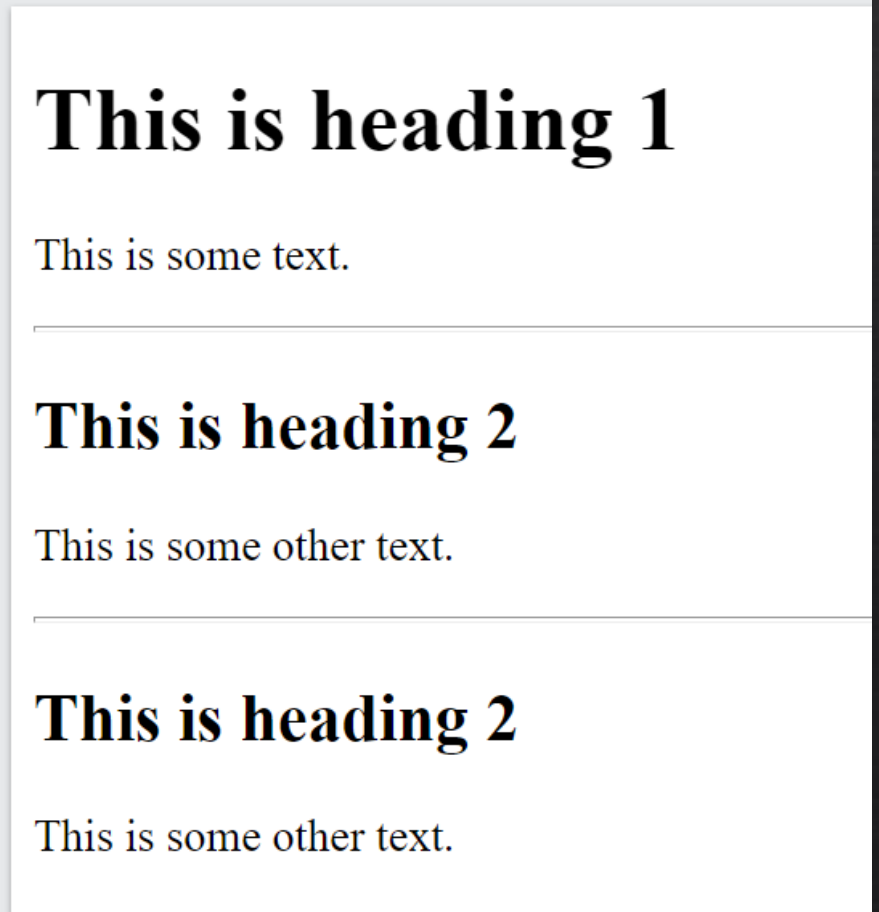

 element

- Element
 definiše prelom reda.
- Koristite
 ako želite prelom reda (novi red) bez početka novog paragrafa.

```
<!DOCTYPE html>
<html>
<body>

<p>This is<br>a paragraph<br>with line breaks.</p>

</body>
</html>
```

This is
a paragraph
with line breaks.

<pre> element

- HTML <pre> element definiše unapred formatirani tekst.
- Tekst unutar <pre> elementa se prikazuje u fontu fiksne širine (obično Courier) i čuva razmake i prelome redova

```
<!DOCTYPE html>
<html>
<body>

<p>The pre tag preserves both spaces and line breaks:</p>

<pre>
   My Bonnie lies over the ocean.

   My Bonnie lies over the sea.

   My Bonnie lies over the ocean.

   Oh, bring back my Bonnie to me.
</pre>

</body>
</html>
```

The pre tag preserves both spaces and line breaks:

```
   My Bonnie lies over the ocean.

   My Bonnie lies over the sea.

   My Bonnie lies over the ocean.

   Oh, bring back my Bonnie to me.
```

HTML stilovi

- Atribut HTML **style** se koristi za dodavanje stilova elementu kao što su boja, font, veličina i još mnogo toga.

```
<!DOCTYPE html>
<html>
<body>

<p>I am normal</p>
<p style="color:red;">I am red</p>
<p style="color:blue;">I am blue</p>
<p style="font-size:50px;">I am big</p>

</body>
</html>
```

I am normal

I am red

I am blue


I am big

HTML Style atribut

- Podešavanje stila HTML elementa može se izvršiti pomoću atributa style.
- Atribut HTML elementa style ima sledeću sintaksu:

```
<tagname style="property:value;">
```

- **property** je CSS svojstvo. Vrednost je CSS vrednost.

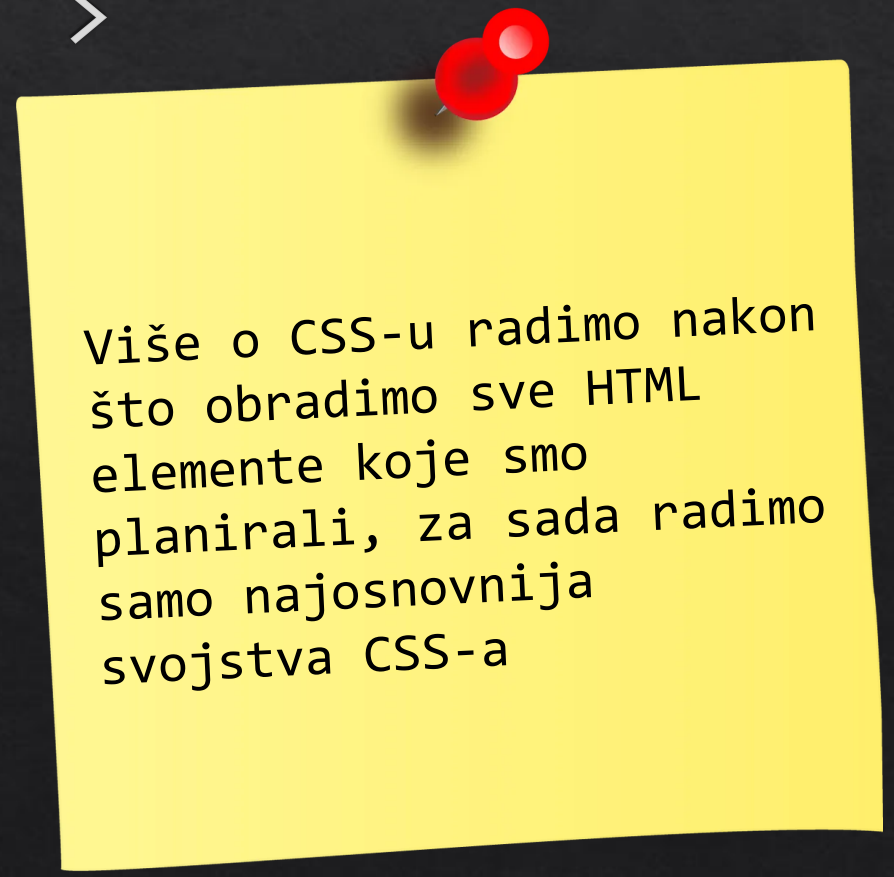


- Svojstvo **background-color** definiše boju pozadine za HTML element kojem je dodatk kao argument.

```
<!DOCTYPE html>
<html>
<body style="background-color:powderblue;">

<h1>This is a heading</h1>
<p>This is a paragraph.</p>

</body>
</html>
```

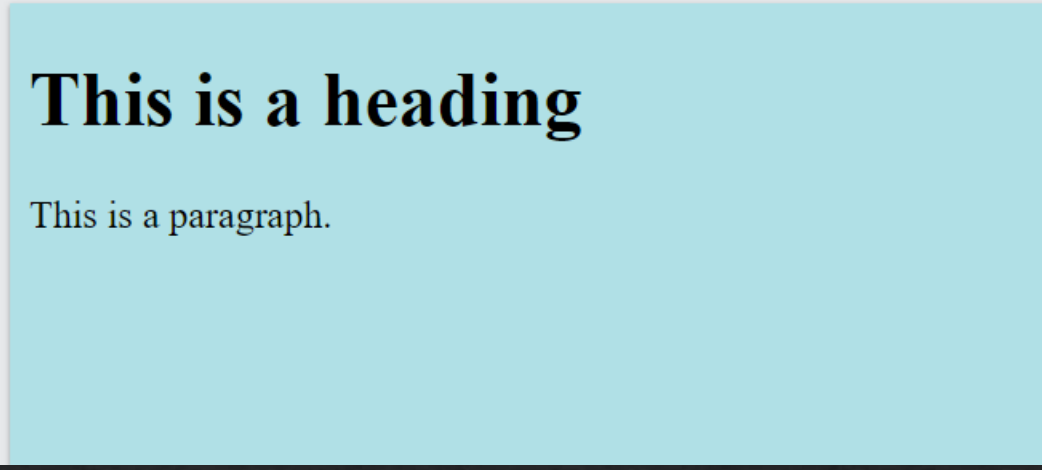


```
<!DOCTYPE html>
<html>
<body>

<h1 style="background-color:powderblue;">This is a heading</h1>
<p style="background-color:tomato;">This is a paragraph.</p>

</body>
</html>
```



- Svojstvo **color** definiše boju teksta za HTML element:

```
<!DOCTYPE html>
<html>
<body>

<h1 style="color:blue;">This is a heading</h1>
<p style="color:red;">This is a paragraph.</p>

</body>
</html>
```



Boje u HTML-u i CSS-u


- U HTML-u, boja se može navesti korišćenjem imena boje, ima preko 140 imena boja (red, blue, orange, lightgray, dodgerblue, mediumseagreen,...)
- boje se takođe mogu zadati korišćenjem RGB, HEX, HSL, RGBA i HSLA vrijednosti.
- rgb(red, green, blue)
- rgba(red, green, blue, alpha)
- #rrggbb
- hsl(hue, saturation, lightness)
- hsla(hue, saturation, lightness, alpha)

- Svojstvo **font-family** definiše font koji će se koristiti za HTML element:

```
<!DOCTYPE html>
<html>
<body>

<h1 style="font-family:verdana;">This is a heading</h1>
<p style="font-family:courier;">This is a paragraph.</p>

</body>
</html>
```

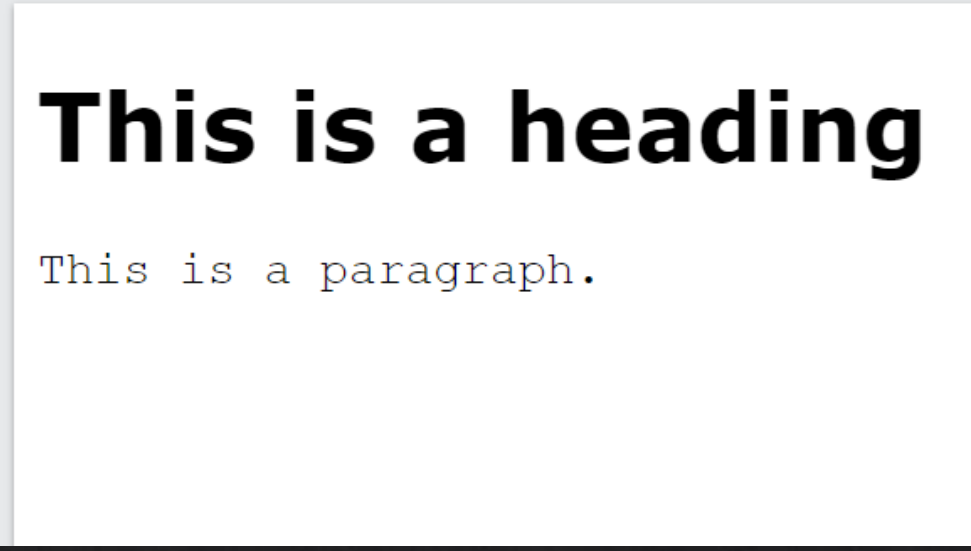


- Svojstvo **font-size** definiše veličinu teksta za HTML element (koliko će procentualno biti uvećan):

```
<!DOCTYPE html>
<html>
<body>

<h1 style="font-size:300%;">This is a heading</h1>
<p style="font-size:160%;">This is a paragraph.</p>

</body>
</html>
```

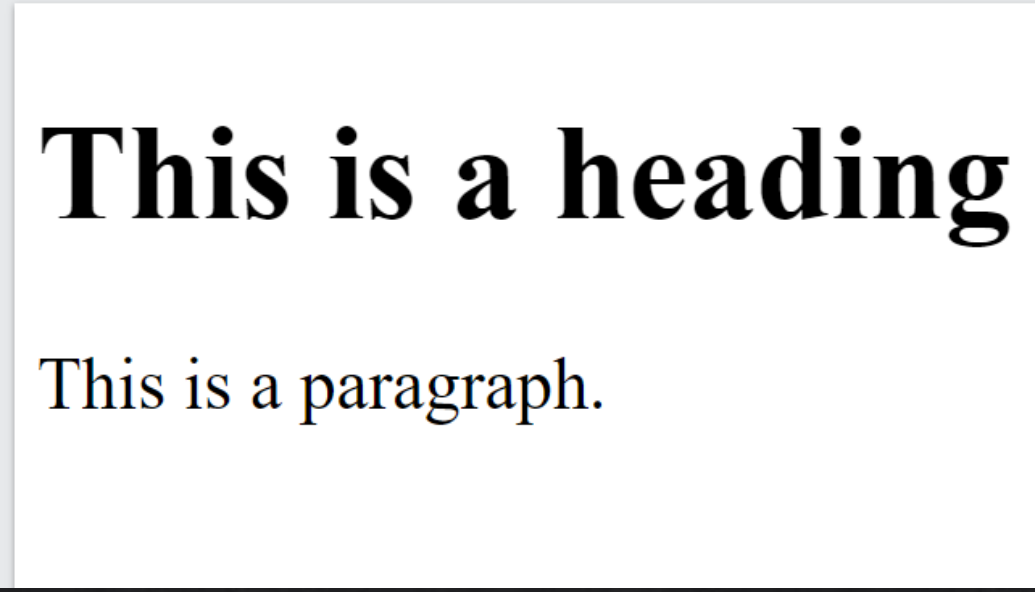


- Svojstvo **text-align** definiše horizontalno poravnanje teksta za HTML element:

```
<!DOCTYPE html>
<html>
<body>

<h1 style="text-align:center;">Centered Heading</h1>
<p style="text-align:center;">Centered paragraph.</p>
<p style="text-align:left;">Left paragraph.</p>
<p style="text-align:right;">Right paragraph.</p>

</body>
</html>
```

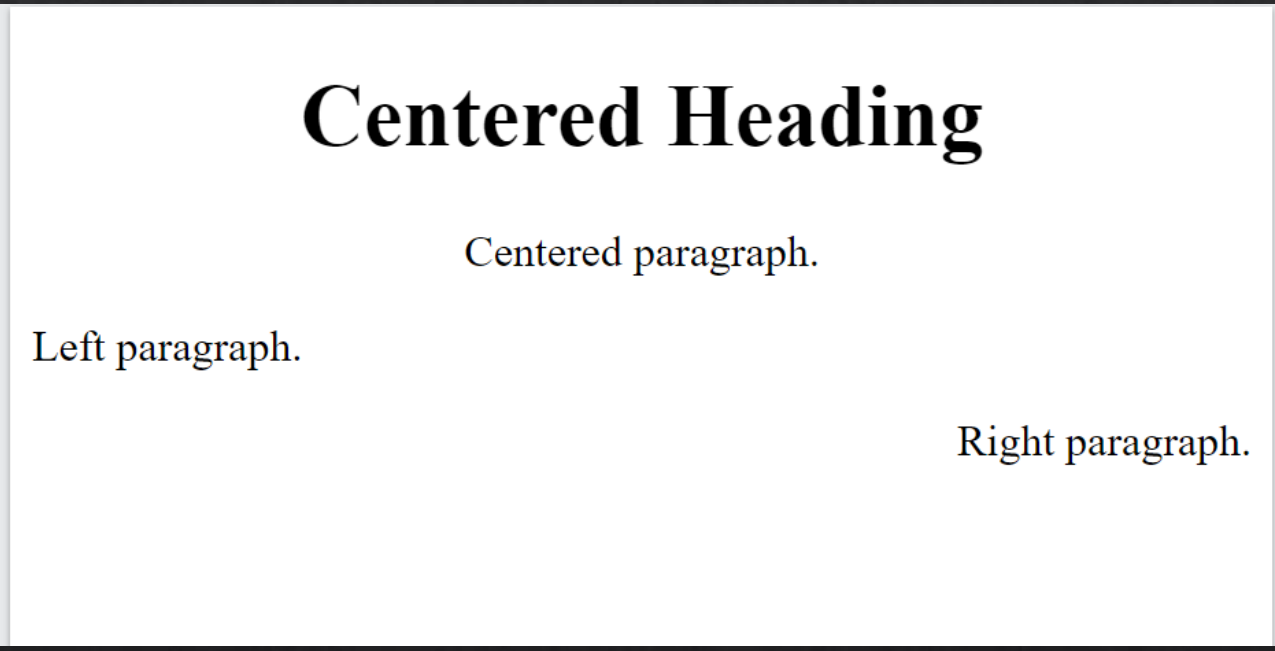

HTML elementi za formatiranje

- Elementi oblikovanja su dizajnirani da prikazuju posebne tipove teksta:

- <b> - Boldovan tekst
- - Važan tekst
- <i> - Italic
- - Naglašen tekst
- <mark> - Markiran tekst
- <small> - Smanjen tekst
- <del> - Precrtan tekst
- <ins> - Podvučen tekst
- <sub> - U indeksu dole
- <sup> - u indeksu gore

```
<!DOCTYPE html>
<html>
<body>

<p>My favorite color is <del>blue</del> <ins>red</ins>.</p>

</body>
</html>
```

My favorite color is ~~blue~~ red.

<blockquote> elementi - za citate

- HTML **<blockquote>** element definiše dio koji je citiran iz drugog izvora.
- Veb pregledači obično uvlače (izdvaja) citat a imate mogućnost i da navedete link odakle potiče citat.

```
<!DOCTYPE html>
<html>
<body>

<p>Browsers usually indent blockquote elements.</p>

<blockquote cite="http://www.worldwildlife.org/who/index.html">
For nearly 60 years, WWF has been protecting the future of nature. The
world's leading conservation organization, WWF works in 100 countries and
is supported by more than one million members in the United States and
close to five million globally.
</blockquote>

</body>
</html>
```

Browsers usually indent blockquote elements.

> For nearly 60 years, WWF has been protecting the future of nature. The world's leading conservation organization, WWF works in 100 countries and is supported by more than one million members in the United States and close to five million globally.

Element <q> - za kratke citate

- Veb pregledači obično ubacuju navodnike oko citata ali ne izdvajaju posebno tekst kao što radi <blockquote>.

```
<!DOCTYPE html>
<html>
<body>

<p>Browsers usually insert quotation marks around the
q element.</p>

<p>WWF's goal is to: <q>Build a future where people
live in harmony with nature.</q></p>

</body>
</html>
```

Browsers usually insert quotation marks around the q element.

WWF's goal is to: “Build a future where people live in harmony with nature.”

Element <abbr> - za skraćenice


- <abbr> definiše skraćenicu ili akronim, kao što su „HTML“, „CSS“, „Mr.“, „Dr.“, „ASAP“, „ATM“.
- Označavanje da je nešto skraćenica može dati korisne informacije samom korisniku ali i algoritmima u pretraživačima radi pretraživanja WWW-a.

```
<!DOCTYPE html>
<html>
<body>

<p>The <abbr title="World Health Organization">WHO</abbr> was
founded in 1948.</p>

<p>Marking up abbreviations can give useful information to
browsers, translation systems and search-engines.</p>

</body>
</html>
```

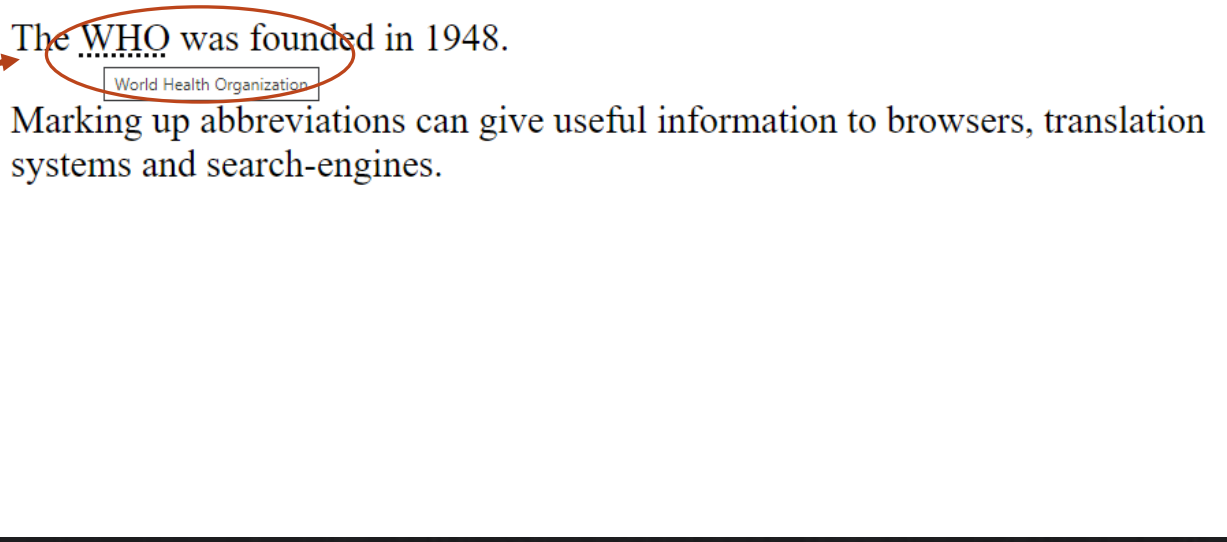

<address> - za kontakt informacije

- Kontakt informacije mogu biti adresa e-pošte, URL, fizička adresa, broj telefona, rukovodstvo društvenih mreža itd.

```
<!DOCTYPE html>
<html>
<body>

<p>The HTML address element defines contact information
(author/owner) of a document or article.</p>

<address>
Written by John Doe.<br>
Visit us at:<br>
Example.com<br>
Box 564, Disneyland<br>
USA
</address>

</body>
</html>
```

The HTML address element defines contact information (author/owner) of a document or article.

Written by John Doe.
Visit us at:
Example.com
Box 564, Disneyland
USA

<cite> - za ime djela

- HTML oznaka <cite> definiše naslov kreativnog djela (npr. knjiga, pesma, pesma, film, slika, skulptura, itd.). Napomena: Ime osobe nije naslov djela.
- Tekst u elementu <cite> obično se prikazuje kurzivom (italik).

```
<!DOCTYPE html>
<html>
<body>

<p>The HTML cite element defines the title of a work.</p>
<p>Browsers usually display cite elements in italic.</p>

<img src="img_the_scream.jpg" width="220" height="277" alt="The Scream">
<p><cite>The Scream</cite> by Edvard Munch. Painted in 1893.</p>

</body>
</html>
```

The HTML cite element defines the title of a work.

Browsers usually display cite elements in italic.



The Scream by Edvard Munch. Painted in 1893.

Komentari u kodu

- `<!-- Write your comments here -->`
- Veb pregledač ne prikazuje komentare, ali oni mogu pomoći u dokumentovanju vašeg HTML izvornog koda.

```
<!DOCTYPE html>
<html>
<body>

<!-- This is a comment -->
<p>This is a paragraph.</p>
<!-- Comments are not displayed in the browser -->

</body>
</html>
```

This is a paragraph.

<a> - za linkove

- Atributi:
- **href** – adresa dokumenta koji se otvara (URL ili ime i mjesto gdje se nalazi u folderu)
  - Visit W3Schools!
  - W3Schools tutorials
- **target** atribut može imati jednu od sledećih vrijednosti:
  - _self - Podrazumijevano. Otvara dokument u istom prozoru/kartici na kojem je kliknut
  - _blank - Otvara dokument u novom prozoru ili kartici
  - _parent - Otvara dokument u nadređenom okviru
  - _top - Otvara dokument u cijelom tijelu prozora

  Visit W3Schools!

```html
<!DOCTYPE html>
<html>
<body>

<h2>The target Attribute</h2>

<a href="https://www.w3schools.com/" target="_blank">Visit W3Schools!</a>

<p>If target="_blank", the link will open in a new browser window or tab.
</p>

</body>
</html>
```

The target Attribute

Visit W3Schools!

If target="_blank", the link will open in a new browser window or tab.

Link do adrese e-pošte

- Koristite **mailto:** unutar atributa **href** da bi kreirali link koji otvara program za e-poštu korisnika


```
<a href="mailto:someone@example.com">Send email</a>
```

atribut title – dodaje opis linku kada se preko njega pređe mišem

```
<!DOCTYPE html>
<html lang="en-US">
<body>

<h2>Link Titles</h2>
<p>The title attribute specifies extra information about an element. The information is most often shown as a
tooltip text when the mouse moves over the element.</p>
<a href="https://www.w3schools.com/html/" title="Go to W3Schools HTML section">Visit our HTML Tutorial</a>

</body>
</html>
```

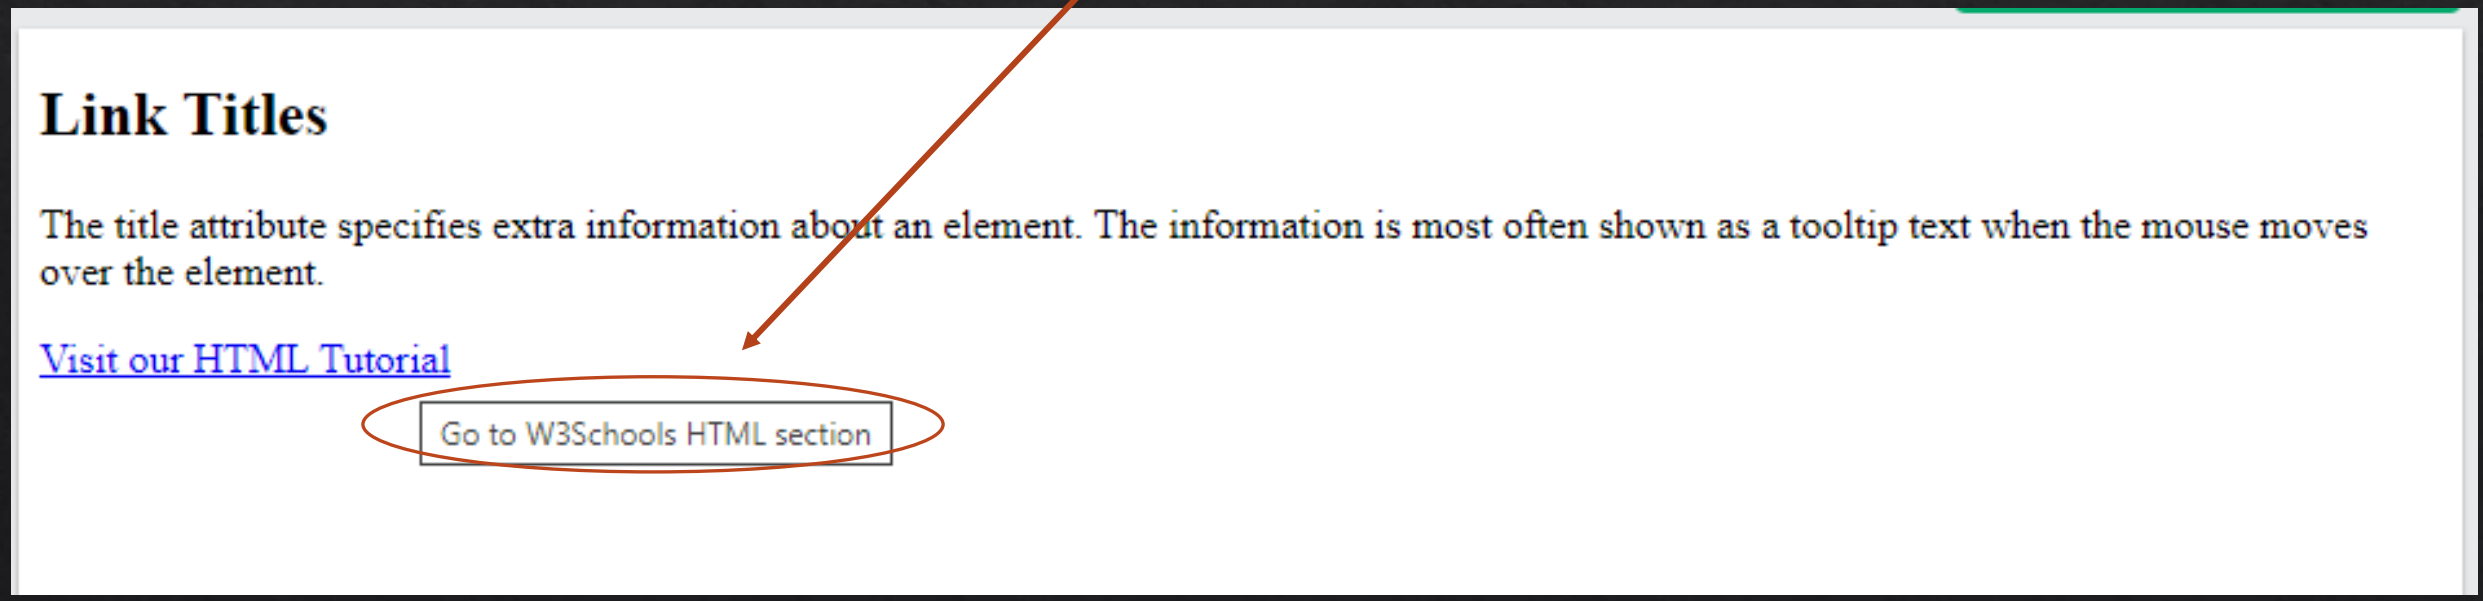

<img> - element za dodavanje slika

- glavni atribut je **src**, to je atribut pomoću kojeg govorimo koju će sliku da učita na dato mjesto

```
<!DOCTYPE html>
<html>
<body>

<h2>HTML Image</h2>
<img src="pic_trulli.jpg" alt="Trulli" width="500" height="333">

</body>
</html>
```


HTML Image



atributi <img> elementa

- **src** - Određuje putanju do slike
- **alt** - Određuje alternativni tekst za sliku. Atribut alt obezbjeđuje alternativni tekst za sliku, ako korisnik iz nekog razloga ne može da je vidi (zbog spore veze, greške u atributu src ili ako korisnik koristi čitač ekrana).
- **width, height** - Atributi širine i visine definišu širinu i visinu slike u pikselima. Uvijek navedite širinu i visinu slike. Ako širina i visina nisu navedene, veb stranica može da treperi dok se slika učitava. Dimenzije mogu biti navedene u pikselima (width="500" height="600"), a mogu i u procentima koliko stranice zauzimaju (width="50%" height="30%"). Kod zadavanj adimenzija treba voditi računa da se slika ne deformiše pa možete zadati samo jednu dimenziju a druga sama da se odredi u zavisnosti od zadane.

- Ukoliko želite da se oko slike obmotava tekst onda morate da koristite stilove. Pomoću stilova može se podesiti i dimenzija slike.
- za obmotavanje teksta dodati atribut
  - style="float:right" (float stil može da ima i vrijednost left)
- za davanje dimenzija preko stilova treba dodati atribut
  - style="width:42px; height:42px;" (a mogu i procenti width:50%;)
- Svi stilovi za jedan element mogu da se stave u jedan atribut
  - style="float:left; width:42px; height:42px;"

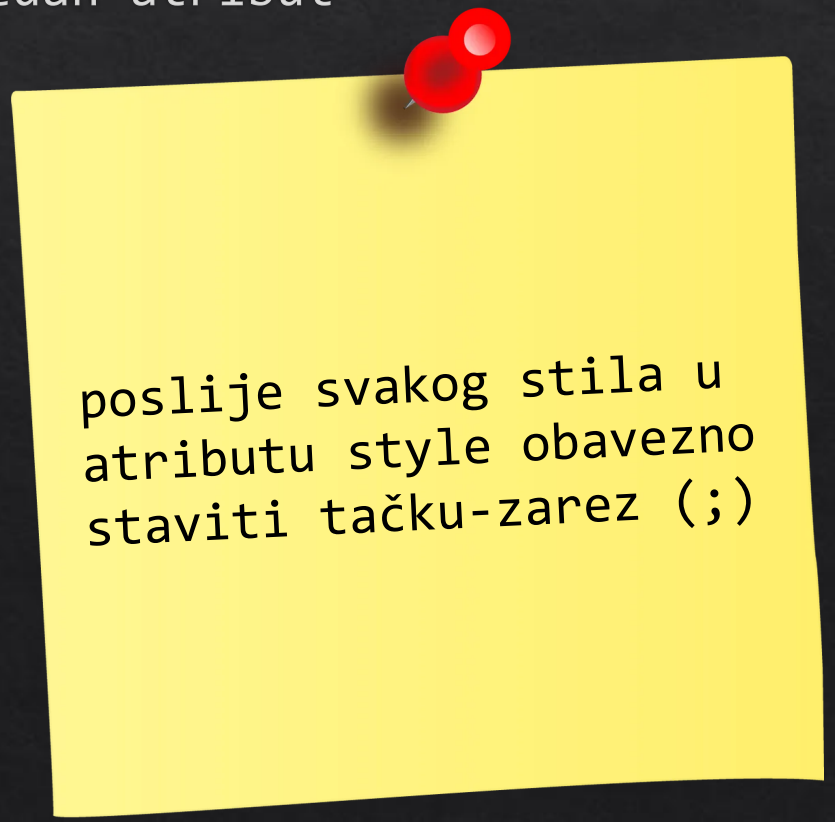

Slika može da bude link

```
<!DOCTYPE html>
<html>
<body>


<h2>Image as a Link</h2>

<p>The image below is a link. Try to click on it.</p>

<a href="default.asp"><img src="smiley.gif" alt="HTML tutorial" style="width:42px;height:42px;"></a>

</body>
</html>
```

Klikom na sličicu pokreće se link default.asp

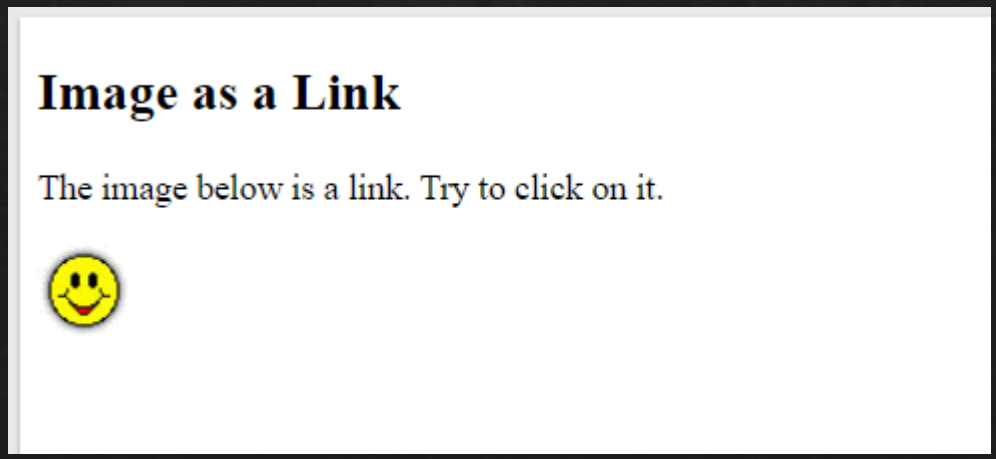

Domaći

- Pored naslovne strane (index.html) treba dodati dodati stranice o_temi.html i galerija.html. Na početku svake stranice stoje linkovi ka ostalim stranicama (neka vrsta menija za vaš sajt)
- o_temi.html koja sadrži
  - opširniji tekst o temi koju ste izabrali i iskoristiti većinu elemenata koje smo radili (voditi računa o dizajnu i ne dodavati elemente samo da bi bili na stranici). U tekstu moraju biti umetnute barem dvije slike oko kojih se obmotava tekst.
- galerija.html
  - Galerija sadrži barem 10 slika predefinisane dimenzije vezanih za vašu temu. Klikom na neku sliku od datih slika otvara se ista ta slika u pretraživaču u novom prozoru ili novoj kartici