Čas: 09 i 10

RAČUNARSKE I VEB PREZENTACIJE

Nastavnik: Mladen Janković

Tema: HTML - liste

w3schools.com

Liste

- HTML liste omogućavaju veb programerima da grupišu skup srodnih stavki u liste.

An unordered HTML list:

- Item
- Item
- Item
- Item

An ordered HTML list:

1. First item
2. Second item
3. Third item
4. Fourth item

- Neuređena/nenumerisana lista počinje oznakom <ul>.
- Svaka stavka liste počinje oznakom <li>.
- Stavke liste će podrazumevano biti označene sa bullets (mali crni krugovi):

```
<!DOCTYPE html>
<html>
<body>

<h2>An unordered HTML list</h2>

<ul>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ul>

</body>
</html>
```




- CSS svojstvo `list-style-type` se koristi za definisanje stila markera stavke liste.
- Može imati jednu od sledećih vrednosti: disc, circle, squere, none
- `list-style-image: url('images/bullet.svg')`

```
<!DOCTYPE html>
<html>
<body>

<h2>Unordered List with Square Bullets</h2>

<ul style="list-style-type:square;">
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ul>

</body>
</html>
```

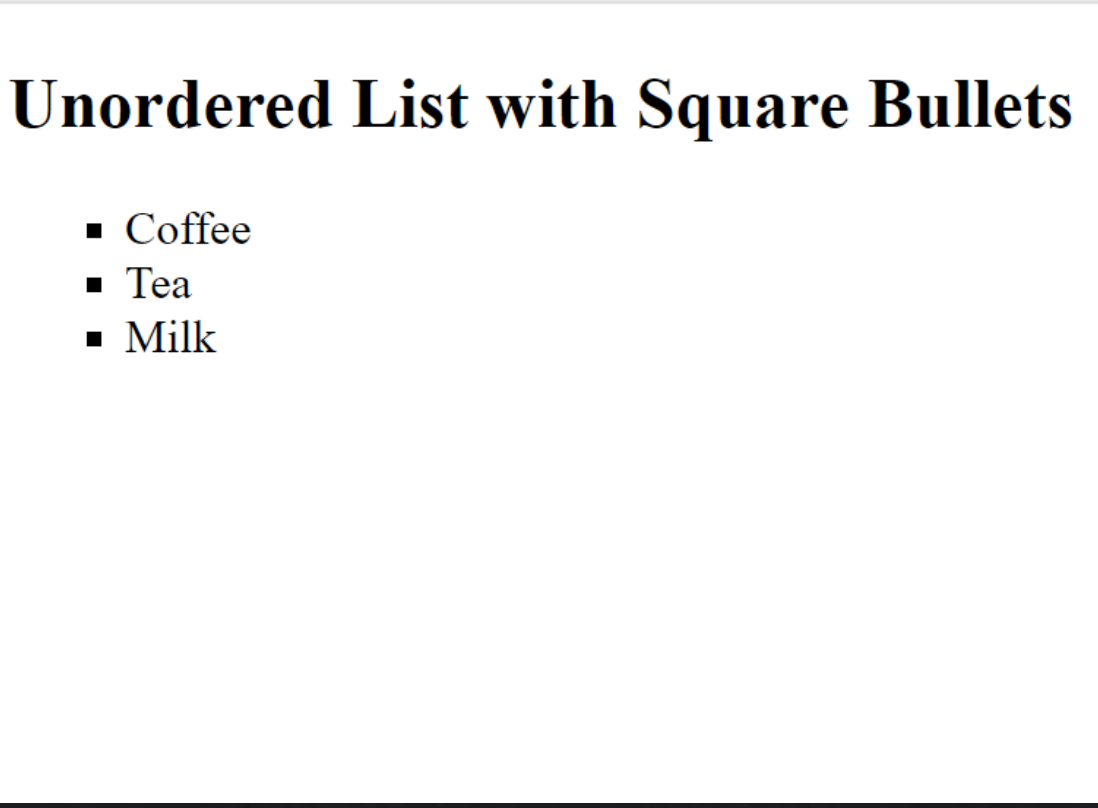

- Liste mogu biti ugniježđene (lista unutar liste):

```
<!DOCTYPE html>
<html>
<body>

<h2>A Nested List</h2>
<p>Lists can be nested (list inside list):</p>

<ul>
  <li>Coffee</li>
  <li>Tea
    <ul>
      <li>Black tea</li>
      <li>Green tea</li>
    </ul>
  </li>
  <li>Milk</li>
</ul>

</body>
</html>
```

A Nested List

Lists can be nested (list inside list):

- Coffee
- Tea
  - Black tea
  - Green tea
- Milk

- Uređena/numerisana lista počinje oznakom <ol>.
- Svaka stavka liste počinje oznakom <li>.
- Stavke liste će podrazumevano biti označene brojevima:

```
<!DOCTYPE html>
<html>
<body>

<h2>An ordered HTML list</h2>

<ol>
  <li>Coffee</li>
  <li>Tea</li>
  <li>Milk</li>
</ol>

</body>
</html>
```

An ordered HTML list

1. Coffee
2. Tea
3. Milk

- Atribut type:
  - type="1" type="A" type="a" type="I" type="i"
- Atribut start:
  - Npr start="50"

Block & Inline elementi

- Svaki HTML element ima podrazumjevanu vrijednost prikaza, u zavisnosti od toga koji je tip elementa.
- Postoje dvije vrijednosti prikaza: block i inline.


Elementi na nivou bloka (Block-level elementi)

- Element na nivou bloka uvijek počinje u novom redu, a pretraživači automatski dodaju razmak (marginu) prije i poslije elementa.
- Element na nivou bloka uvijek zauzima punu dostupnu širinu (proteže se ulijevo i udesno koliko god može).
- Dva najčešće korišćena blok elementa su: <p> i .
- Element <p> definiše pasus u HTML dokumentu.
- Element definiše jednu cjelinu ili odjeljak u HTML dokumentu, koristimo ga kad želimo da grupišemo više elemenata.

```
<!DOCTYPE html>
<html>
<body>

<div style="background-color:black;color:white;padding:20px;">
  <h2>London</h2>
  <p>London is the capital city of England. It is the most populous city in the United Kingdom, with a metropolitan area of over 13 million inhabitants.</p>
  <p>Standing on the River Thames, London has been a major settlement for two millennia, its history going back to its founding by the Romans, who named it Londinium.</p>
</div>

</body>
</html>
```

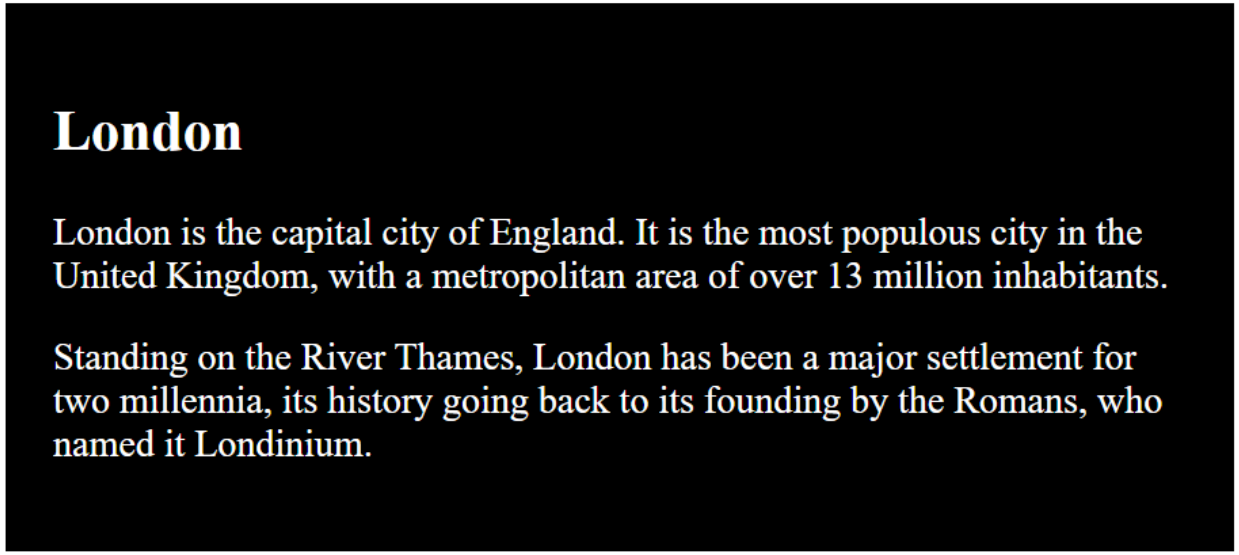

Inline elementi

- Inline element ne počinje u novom redu.
- Inline element zauzima samo onoliko širine koliko je potrebno.
- Primjer inline elementa <img>, .
- Element definiše jednu cjelinu ili odjeljak u HTML elementu, koristimo ga kad želimo da grupišemo više elemenata. Najčešće upotreba je da izdvojimo dio teksta iz pasusa na koji treba primjeniti drugačije stilove.

```
<!DOCTYPE html>
<html>
<body>

<h1>The span element</h1>

<p>My mother has <span style="color:blue;font-
weight:bold;">blue</span> eyes and my father has <span
style="color:darkolivegreen;font-weight:bold;">dark
green</span> eyes.</p>

</body>
</html>
```

The span element

My mother has **blue** eyes and my father has **dark green** eyes.

HTML class atribut

- HTML atribut class se koristi za određivanje klase za HTML element ili elemente.
- Više HTML elemenata može da bude iste klase.
- Atribut class se često koristi da kada želimo da primjenimo isti CSS na više različitih elemenata kojima damo isto ime za class atribut.
- Atribut class se može koristiti na bilo kom HTML elementu.
- **Napomena:** Ime klase razlikuje velika i mala slova!


```html
<!DOCTYPE html>
<html>
<head>
<style>
.city {
  background-color: tomato;
  color: white;
  border: 2px solid black;
  margin: 20px;
  padding: 20px;
}
</style>
</head>
<body>

<div class="city">
<h2>London</h2>
<p>London is the capital of England.</p>
</div>

<div class="city">
<h2>Paris</h2>
<p>Paris is the capital of France.</p>
</div>

<div class="city">
<h2>Tokyo</h2>
<p>Tokyo is the capital of Japan.</p>
</div>

</body>
</html>
```

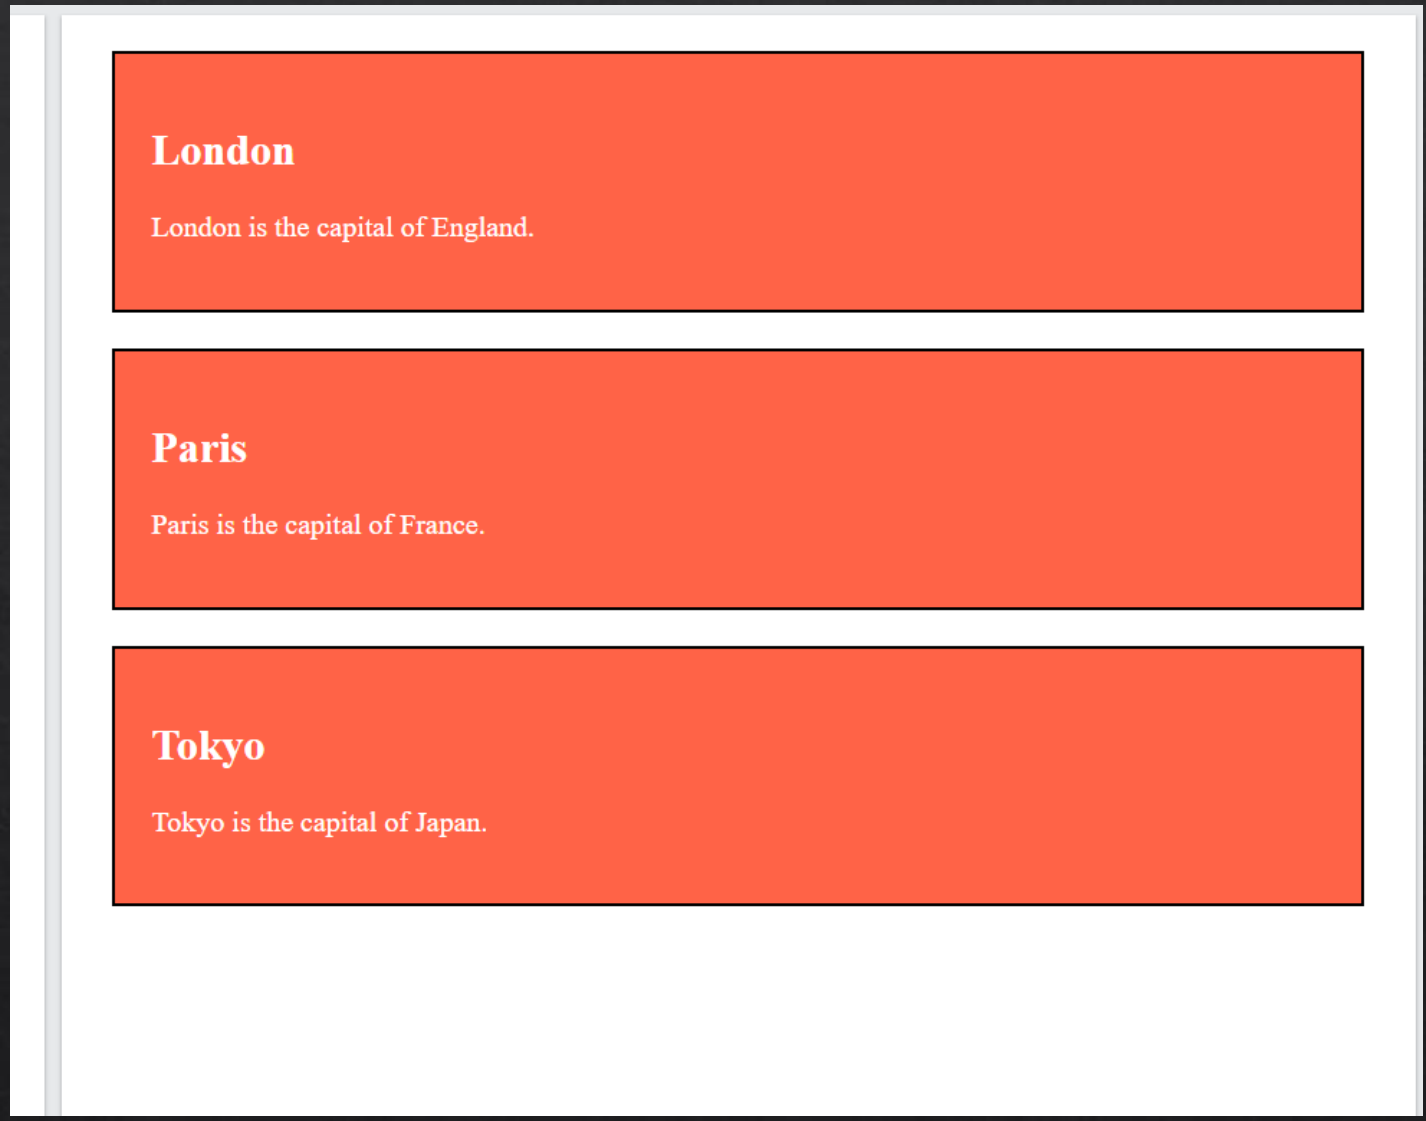

```html
<!DOCTYPE html>
<html>
<head>
<style>
.note {
  font-size: 120%;
  color: red;
}
</style>
</head>
<body>

<h1>My <span class="note">Important</span> Heading</h1>
<p>This is some <span class="note">important</span> text.</p>

</body>
</html>
```

My Important Heading

This is some important text.

HTML id atribut

- Atribut id navodi jedinstveni ID za HTML element.
- Vrijednost atributa id mora biti jedinstvena unutar HTML dokumenta.
- Koristi se isto kao i klasa samo što u ovom slučaju samo jedan element može imati jedan id, dok kod klasa više elemenata (istih ili različitih) je moglo imati istu klasu

```html
<!DOCTYPE html>
<html>
<head>
<style>
#myHeader {
  background-color: lightblue;
  color: black;
  padding: 40px;
  text-align: center;
}
</style>
</head>
<body>

<h2>The id Attribute</h2>
<p>Use CSS to style an element with the id "myHeader":</p>

<h1 id="myHeader">My Header</h1>

</body>
</html>
```



Sidra ili bookmark za stranicu

- Sidra su linkovi koji povezuju link sa određenim dijelom na stranici.

```
<!DOCTYPE html>
<html>
<body>

<p><a href="#C4">Jump to Chapter 4</a></p>
<p><a href="#C10">Jump to Chapter 10</a></p>

<h2>Chapter 1</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 2</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 3</h2>
<p>This chapter explains ba bla bla</p>

<h2 id="C4">Chapter 4</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 5</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 6</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 7</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 8</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 9</h2>
<p>This chapter explains ba bla bla</p>


<h2 id="C10">Chapter 10</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 11</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 12</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 13</h2>
<p>This chapter explains ba bla bla</p>

<h2>Chapter 14</h2>
<p>This chapter explains ba bla bla</p>
```

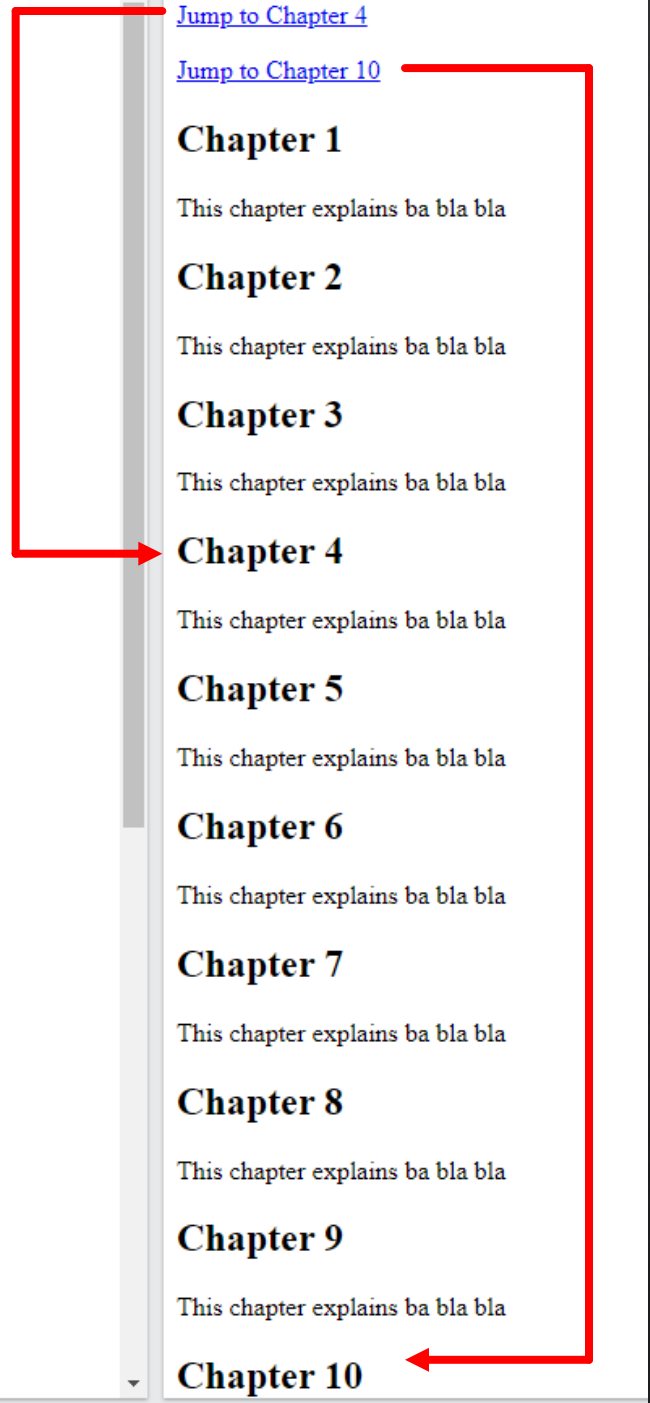

<iframes> element

- HTML iframe se koristi za prikaz veb stranice u okviru druge veb stranice.

```
<!DOCTYPE html>
<html>
<body>


<h2>HTML Iframes</h2>
<p>You can use the height and width attributes to
specify the size of the iframe:</p>

<iframe src="demo_iframe.htm" height="200"
width="300" title="Iframe Example"></iframe>

</body>
</html>
```

HTML Iframes

You can use the height and width attributes to specify the size of the iframe:

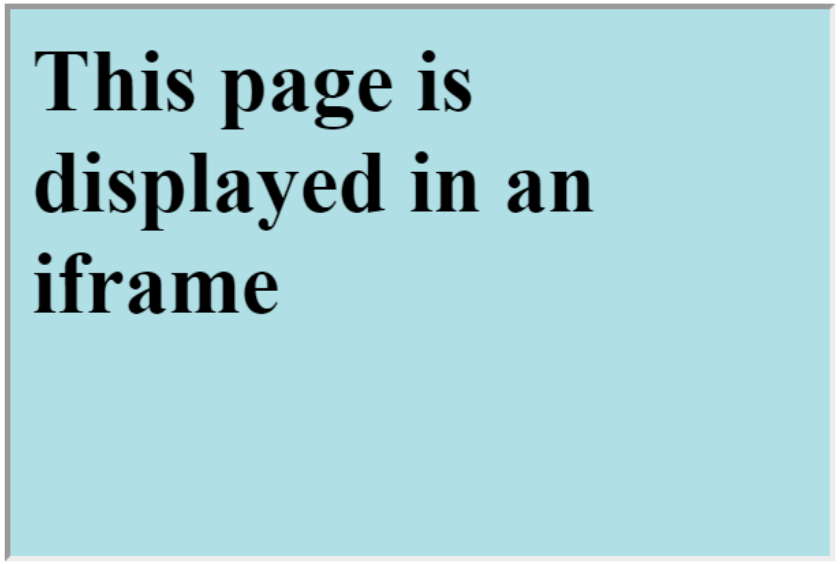

Domaći

- Pored stranica iz prethodnih domaćih (index.html, o_temi.html, galerija.html, mapa.html, tabela.html) treba doraditi projekat. Na početku svake stranice stoje linkovi ka ostalim stranicama (neka vrsta menija za vaš sajt) i sve stranice u tabu (kartici) pretraživača moraju da imaju ime i prezime učenika i ikonicu koja je vezana za temu
- dorada
  - Na početku svake stranice mora da bude nenumerisana lista koja sadrži linkove ka ostalim stranicama (neka vrsta menija za vaš sajt)
  - Na nekoj od stranica dodati barem po jednu numerisanu i nenumerisanu listu, po mogućnosti ugnijezditi jednu listu unutar druge liste
  - Na nekoj od stranica dodati <iframe> element koji će da ugradi neku sajt koji je vezan za vašu temu
  - Na stranici o_temi.html dodati nenumerisanu listu, neku vrstu sadržaja tako da klikom na neku stavku iz liste, pretraživač me prebaci na taj dio stranice sa kojim je taj element povezan (sidra/bookmark)