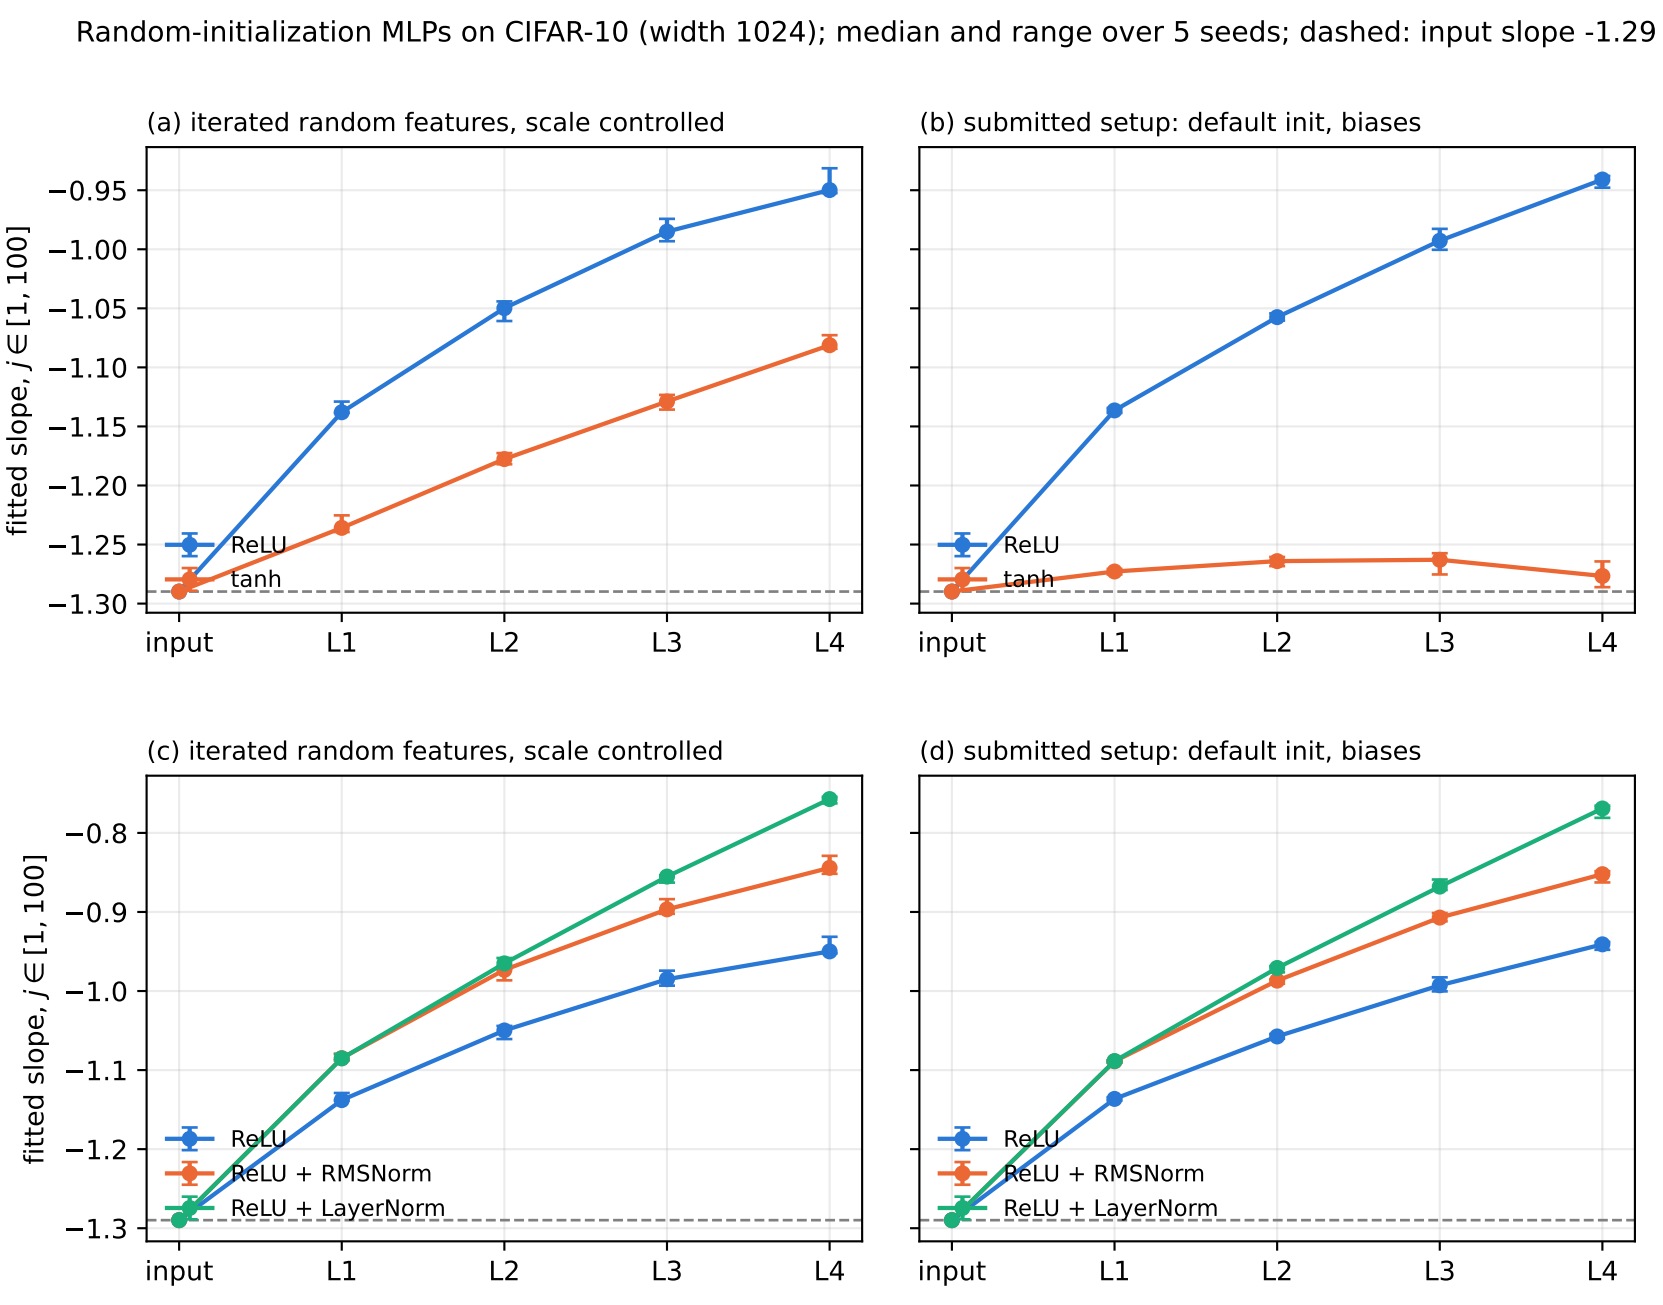
Random-initialization MLPs on CIFAR-10 (width 1024); median and range over 5 seeds; dashed: input slope -1.29
(a) iterated random features, scale controlled
(b) submitted setup: default init, biases
(c) iterated random features, scale controlled
(d) submitted setup: default init, biases
fitted slope, $j \in [1, 100]$
−0.95
−1.00
−1.05
−1.10
−1.15
−1.20
−1.25
−1.30
−0.8
−0.9
−1.0
−1.1
−1.2
−1.3
input
L1
L2
L3
L4
ReLU
tanh
ReLU + RMSNorm
ReLU + LayerNorm