# Feature set analysis for chess NNUE networks Tesis de Licenciatura

#### Martín Emiliano Lombardo

Departamento de Computación Facultad de Ciencias Exactas y Naturales Universidad de Buenos Aires

2024



This is some text in the first frame.

This is some text in the first frame. This is some text in the first frame. This is some text in the first frame.

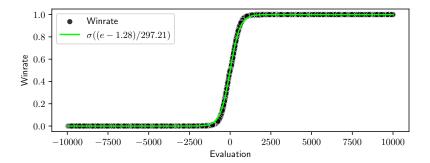


Figure: WDL model function (sigmoid) fitted to 100 million evaluations in the dataset.

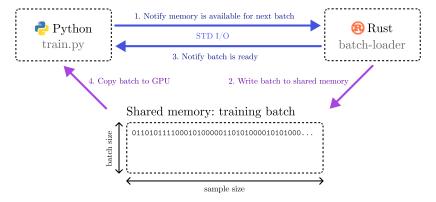


Figure: Sequence of steps to send a batch from the batch-loader subprocess in Rust to Pytorch.