

Install Docker Desktop 4.73.0

1. Install WSL Enable WLS 2

run PowerShell as Administrator


Run command: wsl --install

wsl --set-default-version 2

Restart computer

2. Install Docker Desktop

Run Docker Desktop Installer.exe



Configuration

☒ All users installation (requires password)

☐ Per-user installation (Beta)


☒ Add shortcut to desktop

Cancel

OK

Restart computer

3. Setup Docker Desktop

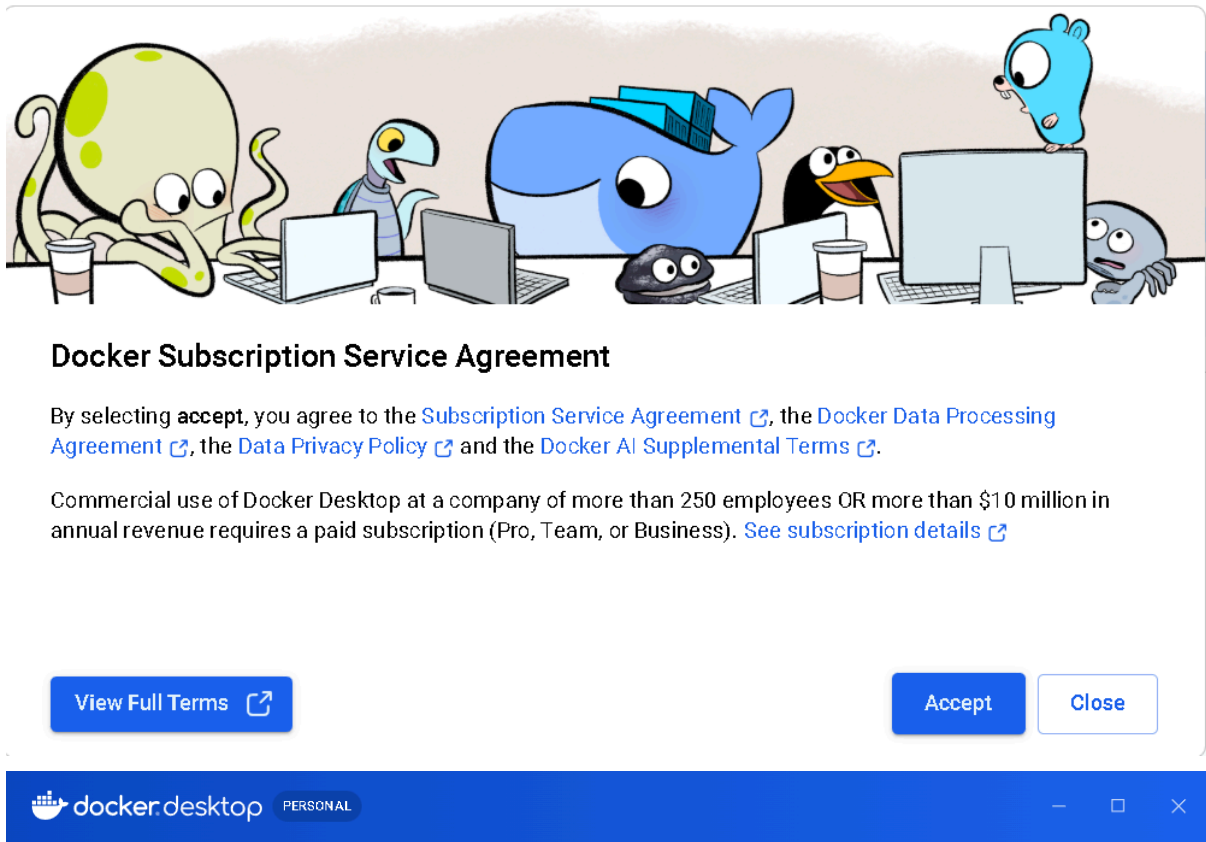

Welcome to Docker

Skip

Work

Personal

Using Docker for work?
We recommend signing in with your work email address.

Work email address


Continue

Or








Create an account 

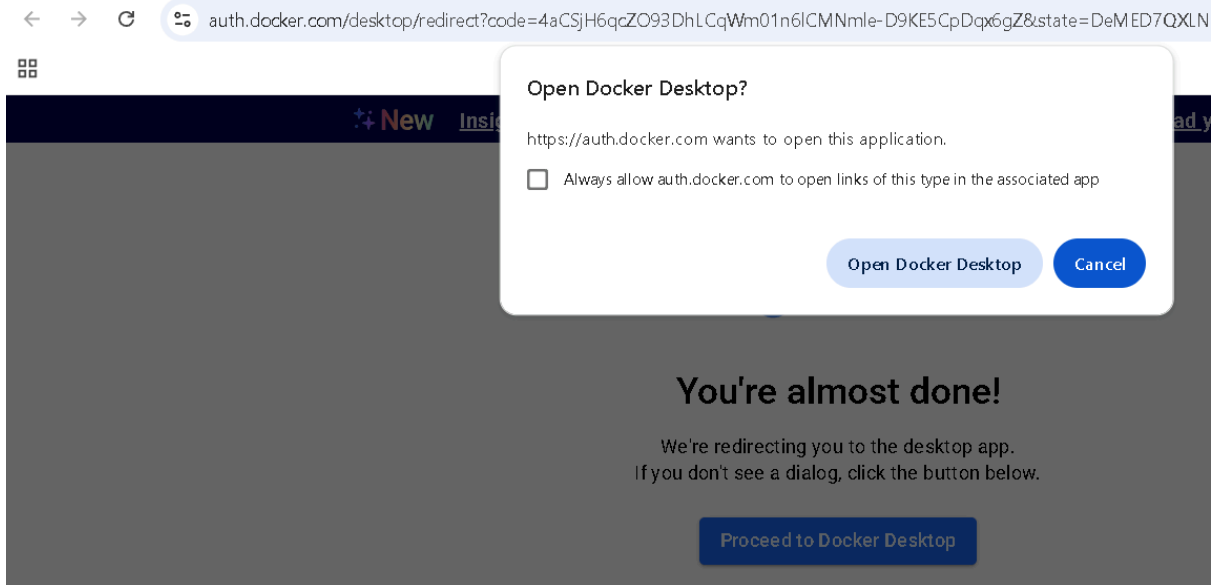



Setup WSL integration

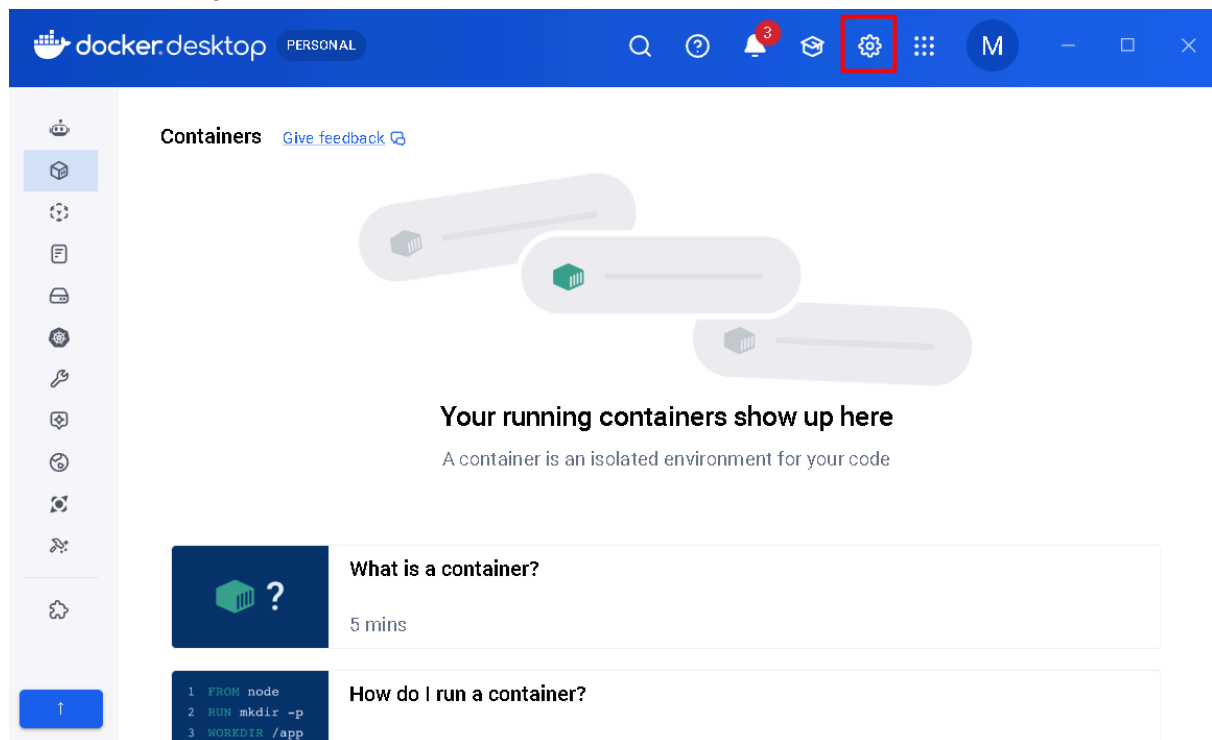

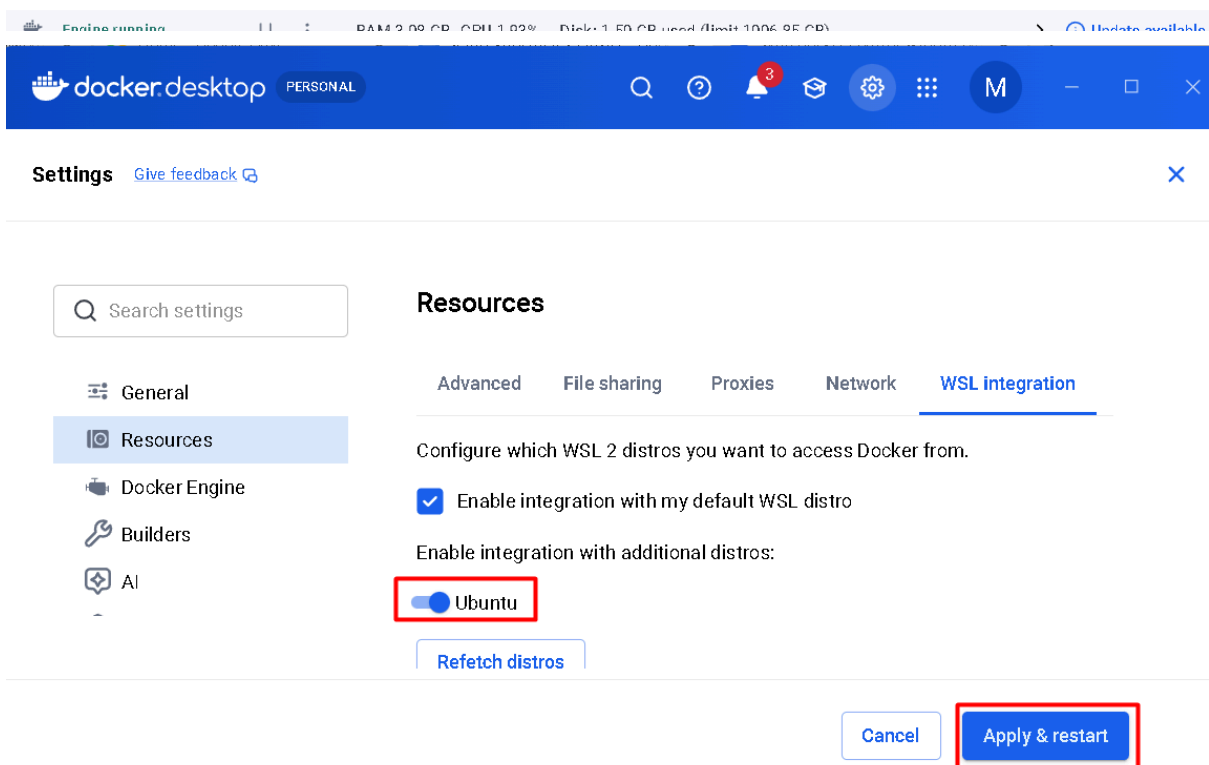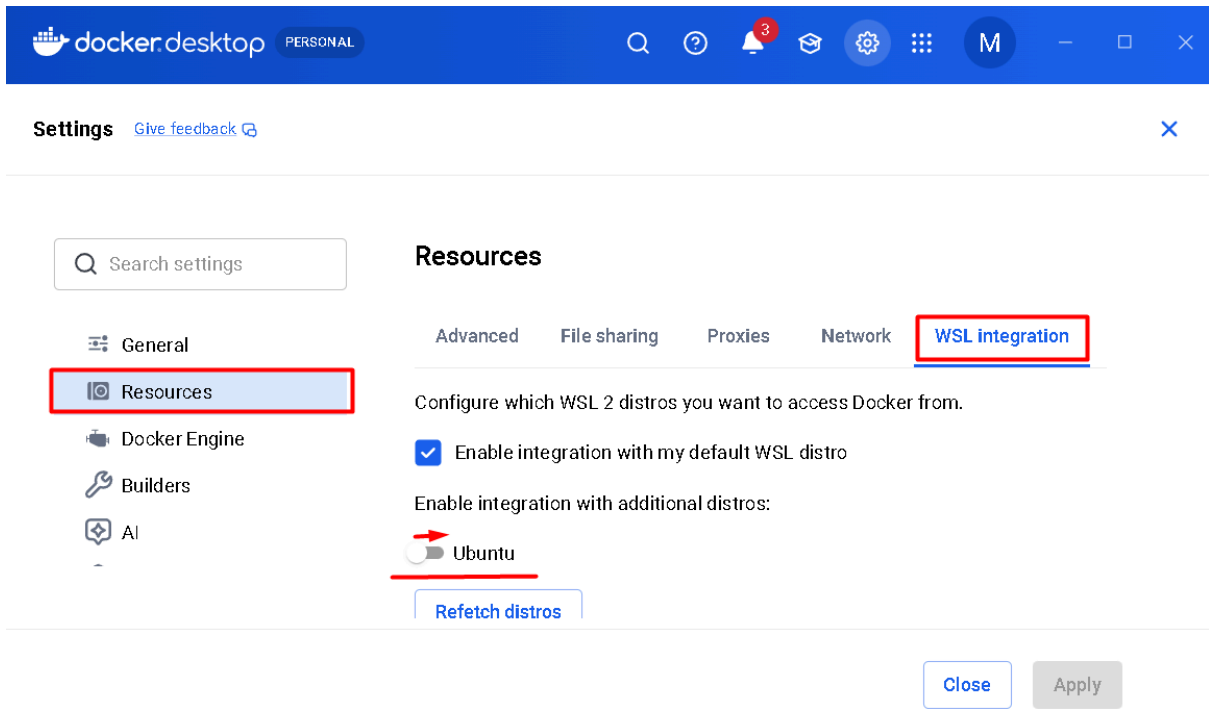

Restart computer

4. Create kubernetes cluster

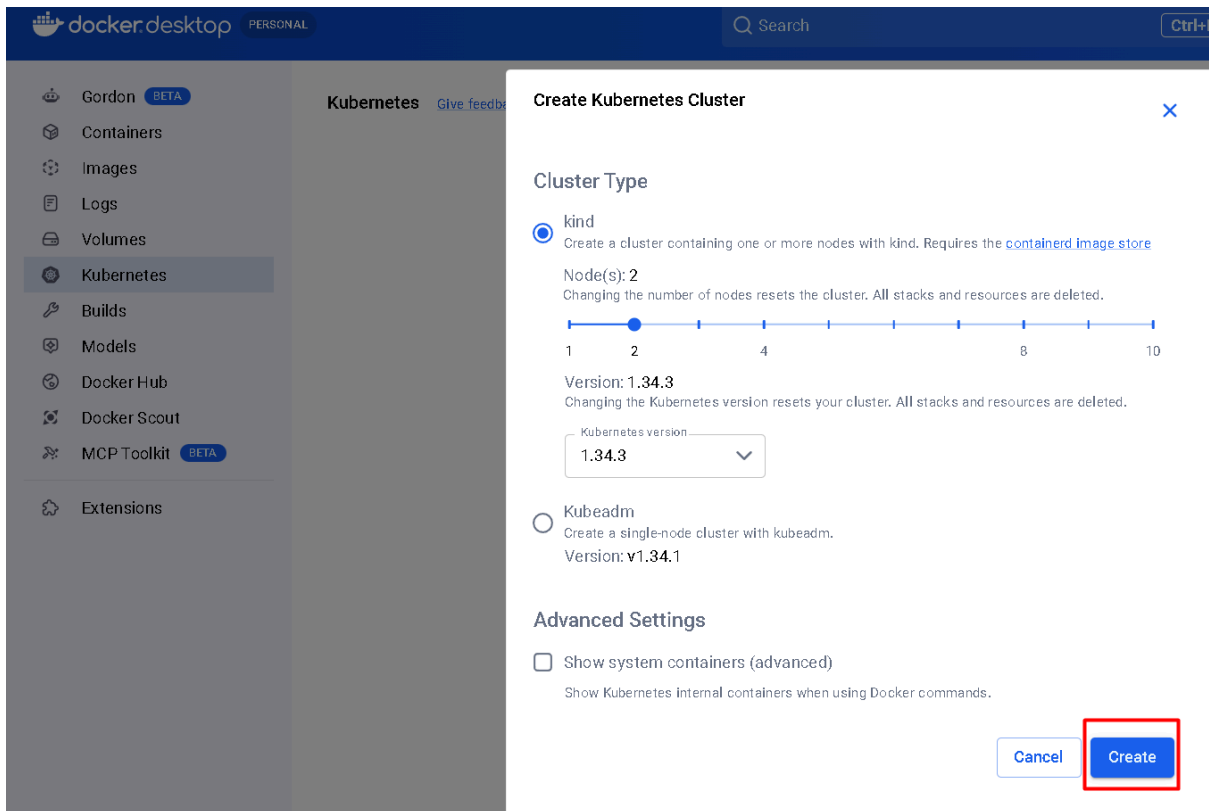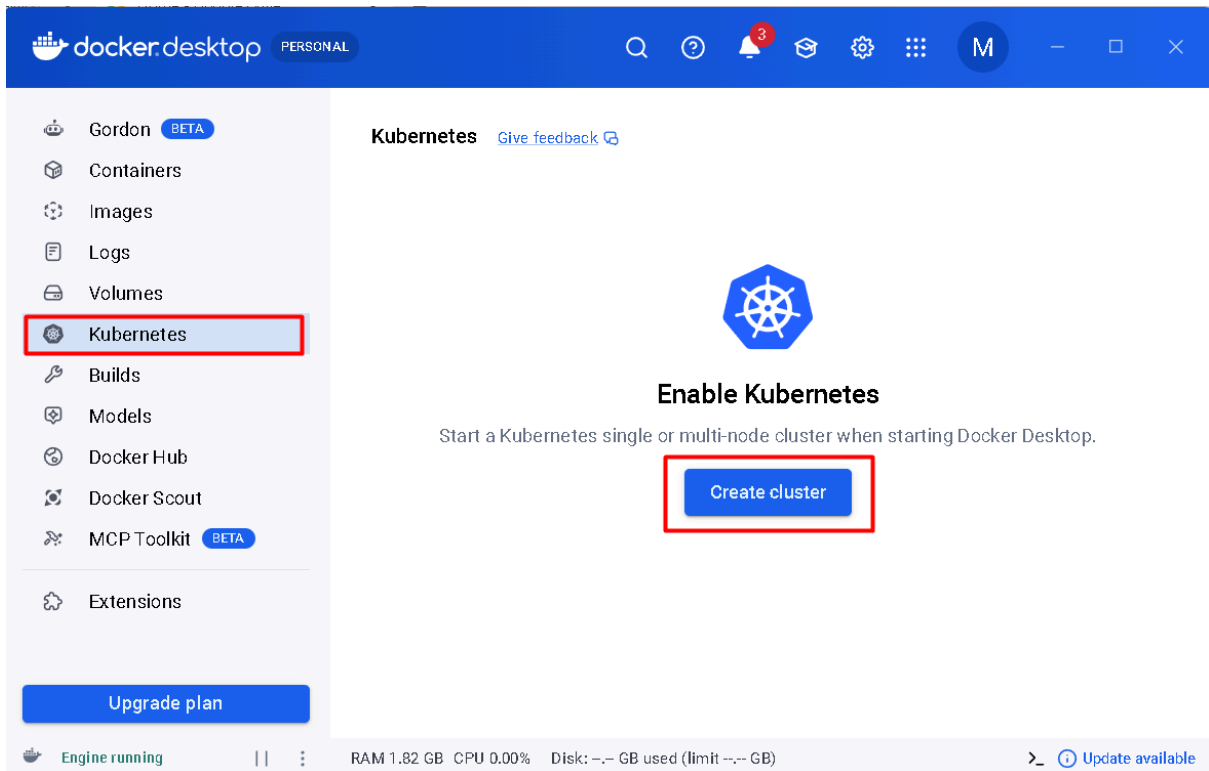

Kubernetes Cluster Installation

Installation takes a few minutes and requires an internet connection.

Cancel

Install

Wait

Final screen:

The screenshot shows the Docker Desktop interface with the Kubernetes section selected in the sidebar. The main panel displays the 'Kubernetes' status, including a namespace dropdown set to 'default', a 'Cluster' section with 'Stop' and 'Edit cluster' buttons, and a table of cluster details. Below this are sections for 'Deployments' and 'Pods', both indicating no items are present and providing instructions on how to create a deployment or run a container. The bottom status bar shows system metrics and an update notification.

Kubernetes [Give feedback](#)

Namespace: default

Cluster Stop Edit cluster

Cluster	Cluster type	Nodes	Kubernetes version
Active	kind	2	v1.34.3

Deployments

No deployments

Run the following command in a terminal to create a deployment

Pods

No pods

Run the following command in a terminal to run a container in a pod

Engine running | RAM 5.27 GB CPU 1.06% Disk: 5.23 GB used (limit 1006.85 GB) | Update available