

# Understanding media-supported childhood education

Mikołaj Małkiński<sup>12\*</sup>

## Abstract

Education during childhood can be highly beneficial for persons development. Thanks to current state of technology it is possible to boost this process by supporting it with media devices. This work tackles a challenge proposed in the *2019 Data Science Bowl* competition which aims to understand key factors standing behind the learning process of young children. Firstly, it performs an analysis of gameplay data gathered by a game-based learning application for children. Then, it formulates a baseline model, constructs hand-crafted features based on domain knowledge and compares the results of different state-of-the-art models such as Support Vector Machines and XGBoost on the extended dataset. Finally it discusses obtained results and presents further research directions which could improve the process of media-supported education for children.

## Keywords

Childhood education — Data analysis — Classification — SVM — XGBoost

<sup>1</sup>Faculty of Mathematics and Information Science, Warsaw University of Technology, Warsaw, Poland

<sup>2</sup>Faculty of Computer Science of Barcelona, Universitat Politècnica de Catalunya, Barcelona, Spain

\*Email: malkinskim@student.mini.pw.edu.pl / mikolaj.malkinski@est.fib.upc.edu

## Contents

<b>1</b>	<b>Introduction</b>	<b>1</b>
<b>2</b>	<b>Dataset</b>	<b>1</b>
<b>3</b>	<b>Methods</b>	<b>2</b>
3.1	Evaluation metric . . . . .	2
3.2	Baseline model . . . . .	2
3.3	Feature engineering . . . . .	3
3.4	Support Vector Machines . . . . .	3
3.5	Comparison with XGBoost . . . . .	3
<b>4</b>	<b>Discussion</b>	<b>3</b>
	<b>Acknowledgments</b>	<b>3</b>
	<b>References</b>	<b>3</b>

## 1. Introduction

With recent advances in technology humans are presented with more and more opportunities to gain insights into the surrounding world. Ability to gather tremendous amounts of data, high processing power of modern machines and possibilities for collaboration between researchers from different parts of the world make it possible to tackle challenging problems on a global scale. Data Science Bowl is a platform created exactly for this purpose. It organises competitions which focus on social good by gathering rich datasets and encourages researchers to collaborate on the solution. Previous events were hosted on the Kaggle platform and tried to tackle problems such as heart disease detection [1], lung

cancer detection [2] or nuclei detection [3], [4]. This year, Data Science Bowl introduced a competition which main goal is to analyse how media can support learning outcomes in early childhood education [5].

The data required for this challenge was collected with *PBS KIDS Measure Up!* application, which is a game-based learning tool developed as a part of the *CPB-PBS Ready to Learn* initiative, supported by the U.S. Department of Education. It consists of anonymous gameplay data about played games and videos watched by children. Based on this data, the goal is to predict how children will perform in their assessments.

This work will perform analysis on available dataset which will outline key characteristics of used education methods and propose ways for improvement. Additionally, it will tackle the main challenge of predicting assessment scores by evaluating the performance of Support Vector Machines [6] and comparing the results with other state-of-the-art methods.

## 2. Dataset

The dataset contains information about game analytics gathered by the *PBS KIDS Measure Up!* application. It places players into a fictional world where they can participate in different activities, games, video clips or assessments. Each assessment is created with the goal of testing player's comprehension of a certain group of measurement-related skills. They are divided into following categories: *Bird Measurer*, *Cart Balancer*, *Cauldron Filler*, *Chest Sorter*, and *Mushroom Sorter*.

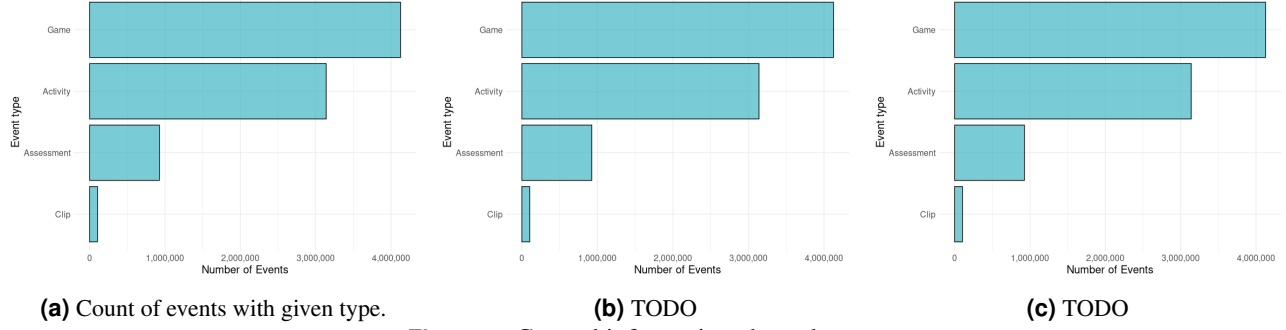


Figure 1. General information about dataset.

The goal of the competition is to predict the number of attempts a child will need to pass given assessment, based on the already gathered gameplay data. Note that each incorrect answer is counted as an attempt. The dataset is divided into two parts: training and testing. The former one contains full history of gameplay data. On the other hand, the latter one is missing history after starts of randomly chosen assessments, for which the number of attempts has to be predicted. Furthermore, the outcomes of assessments are grouped into 4 categories: solved on the first attempt; solved on the second attempt; solved after 3 or more attempts; never solved.

### 3. Methods

This section will describe metrics, models and techniques such as data transformations used to improve the results. All reported scores are computed on the testing set - the predictions of accuracy groups are submitted to the Kaggle platform which evaluates their correctness and returns obtained score.

#### 3.1 Evaluation metric

To evaluate the submission, *Quadratic Weighted Cohen's kappa coefficient* is used. The general Cohen's kappa coefficient is defined as:

$$\kappa = \frac{p_o - p_e}{1 - p_e} \quad (1)$$

, where  $p_o$  is the relative observed agreement among raters (accuracy) and  $p_e$  is the hypothetical probability of chance agreement, using the observed data to calculate the probabilities of each observer randomly seeing each category. In other words,  $\kappa$  is a more robust metric than accuracy which takes into account the possibility of correct solutions occurring by chance.

The weighted  $\kappa$  allows to weight disagreements differently - the score depends on the distance between predicted and actual class. Recall that the considered challenge is a 4-class classification problem. Table 1 presents weights used in a linear weighted  $\kappa$ . They can also be thought as *disagreement scores* - the larger the weight the higher disagreement between predicted and actual class. To understand, consider the case when model predicts accuracy group 2 - the assessment was solved on the second attempt. Then, if the prediction is correct

Table 1. Coefficients of a linear weighted  $\kappa$  for a 4-class classification problem.

Class	0	1	2	3
0	0.00	0.33	0.67	1.00
1	0.33	0.00	0.33	0.67
2	0.67	0.33	0.00	0.33
3	1.00	0.67	0.33	0.00

Table 2. Coefficients of a quadratic weighted  $\kappa$  for a 4-class classification problem.


Class	0	1	2	3
0	0.00	0.56	0.89	1.00
1	0.56	0.00	0.56	0.89
2	0.89	0.56	0.00	0.56
3	1.00	0.89	0.56	0.00

the disagreement score is equal to 0, if assessment was solved on the first attempt (class 3) or after 3 or more attempts (class 1) the prediction is off only by 1 class and the disagreement score is 0.33 and finally if it was never solved it equals to 0.67.

The quadratic version allows to specify that the disagreement score depends not only on the difference between predicted classes but also on the order of the actual class. The details of weights used in this case are shown in the Table 2.

#### 3.2 Baseline model

Firstly a naive model is created based on raw data to give a point of comparison for more advanced methods. As the Figure 2 shows, there is a clear difference between assessment completion rates depending on the problem type. The *Chest Sorter* appears to be the hardest one having around 60% of the attempts never solved, whereas *Mushroom Sorter*, *Cauldren Filler* and *Cart Balancer* are usually solved after the first attempt. Based on this observation a baseline model is built which is based on the median of accuracy groups - for a given child and type of assessment to predict, a median of all previous assessments of this child with given type is taken and this gives the predicted accuracy group. This model achieved value of quadratic weighted  $\kappa$  equal to 0.396.

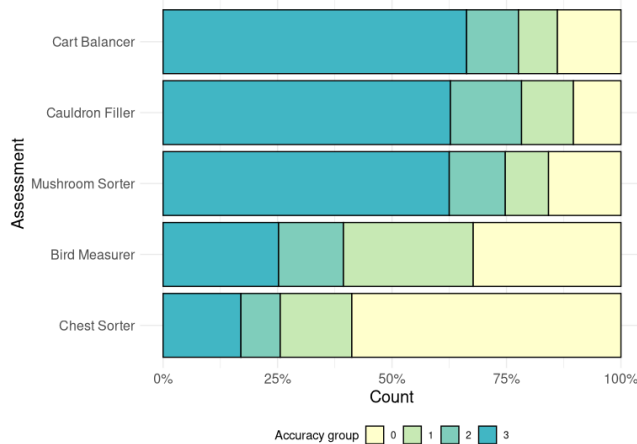

**Figure 2.** Accuracy groups presented for each assessment type - the main idea behind the baseline model.

### 3.3 Feature engineering

To potentially improve the performance of proposed models it may be beneficial to introduce hand-crafted features based on domain knowledge. For this purpose the dataset was extended with fundamental summary statistics for each user such as the number of events, total, median, average and standard deviation of time spent for each type.

### 3.4 Support Vector Machines

### 3.5 Comparison with XGBoost

## 4. Discussion

Quisque ullamcorper placerat ipsum. Cras nibh. Morbi vel justo vitae lacus tincidunt ultrices. Lorem ipsum dolor sit amet, consectetur adipiscing elit. In hac habitasse platea dictumst. Integer tempus convallis augue. Etiam facilisis. Nunc elementum fermentum wisi. Aenean placerat. Ut imperdiet, enim sed gravida sollicitudin, felis odio placerat quam, ac pulvinar elit purus eget enim. Nunc vitae tortor. Proin tempus nibh sit amet nisl. Vivamus quis tortor vitae risus porta vehicula.

**Paragraph** Sed commodo posuere pede. Mauris ut est. Ut quis purus. Sed ac odio. Sed vehicula hendrerit sem. Duis non odio. Morbi ut dui. Sed accumsan risus eget odio. In hac habitasse platea dictumst. Pellentesque non elit. Fusce sed justo eu urna porta tincidunt. Mauris felis odio, sollicitudin sed, volutpat a, ornare ac, erat. Morbi quis dolor. Donec pellentesque, erat ac sagittis semper, nunc dui lobortis purus, quis congue purus metus ultricies tellus. Proin et quam. Class aptent taciti sociosqu ad litora torquent per conubia nostra, per inceptos hymenaeos. Praesent sapien turpis, fermentum vel, eleifend faucibus, vehicula eu, lacus.

## Acknowledgments

So long and thanks for all the fish [6].

**Table 3.** Table of Grades

Name		
First name	Last Name	Grade
John	Doe	7.5
Richard	Miles	2

## References

- [1] Data Science Bowl. Transforming how we diagnose heart disease. <https://datasciencebowl.com/transforming-how-we-diagnose-heart-disease/>, 2015.
- [2] Data Science Bowl. Turning machine intelligence against lung cancer. <https://datasciencebowl.com/turning-machine-intelligence-against-lung-cancer/>, 2016.
- [3] Data Science Bowl. Spot nuclei, speed cures. <https://datasciencebowl.com/spot-nuclei-speed-cures/>, 2018.
- [4] Juan C. Caicedo, Allen Goodman, Kyle W. Karhohs, Beth A. Cimini, Jeanelle Ackerman, Marzieh Haghighi, CherKeng Heng, Tim Becker, Minh Doan, Claire McQuin, Mohammad Rohban, Shantanu Singh, and Anne E. Carpenter. Nucleus segmentation across imaging experiments: the 2018 data science bowl. *Nature Methods*, 2019.
- [5] Data Science Bowl. Uncover the factors to help measure how young children learn. <https://www.kaggle.com/c/data-science-bowl-2019/overview>, 2019.
- [6] Bernhard E. Boser, Isabelle M. Guyon, and Vladimir N. Vapnik. A training algorithm for optimal margin classifiers. In *Proceedings of the Fifth Annual Workshop on Computational Learning Theory, COLT '92*, pages 144–152, New York, NY, USA, 1992. ACM.