




Lecture 7-A: Cluster Analysis

What is Cluster Analysis?

- Finding groups of objects such that the objects in a group will be similar (or related) to one another and different from (or unrelated to) the objects in other groups

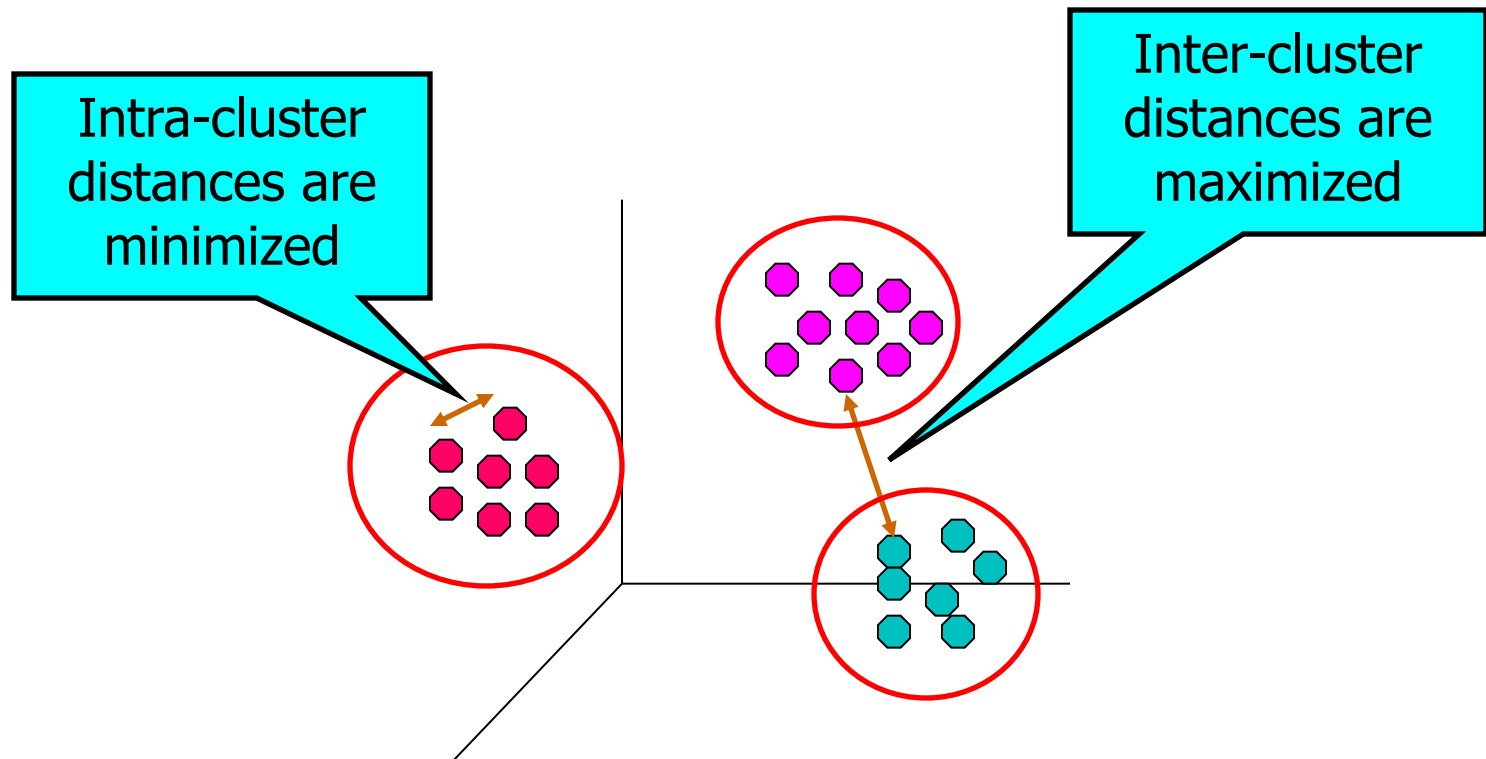

Applications of Cluster Analysis


● Understanding

- Group related documents for browsing, group genes and proteins that have similar functionality, or group stocks with similar price fluctuations

	<i>Discovered Clusters</i>	<i>Industry Group</i>
1	Applied-Matl-DOWN,Bay-Network-Down,3-COM-DOWN,Cabletron-Sys-DOWN,CISCO-DOWN,HP-DOWN,DSC-Comm-DOWN,INTEL-DOWN,LSI-Logic-DOWN,Micron-Tech-DOWN,Texas-Inst-Down,Tellabs-Inc-Down,Natl-Semiconduct-DOWN,Oracl-DOWN,SGI-DOWN,Sun-DOWN	Technology1-DOWN
2	Apple-Comp-DOWN,Autodesk-DOWN,DEC-DOWN,ADV-Micro-Device-DOWN,Andrew-Corp-DOWN,Computer-Assoc-DOWN,Circuit-City-DOWN,Compaq-DOWN,EMC-Corp-DOWN,Gen-Inst-DOWN,Motorola-DOWN,Microsoft-DOWN,Scientific-Atl-DOWN	Technology2-DOWN
3	Fannie-Mae-DOWN,Fed-Home-Loan-DOWN,MBNA-Corp-DOWN,Morgan-Stanley-DOWN	Financial-DOWN
4	Baker-Hughes-UP,Dresser-Inds-UP,Halliburton-HLD-UP,Louisiana-Land-UP,Phillips-Petro-UP,Unocal-UP,Schlumberger-UP	Oil-UP

● Summarization

- Reduce the size of large data sets

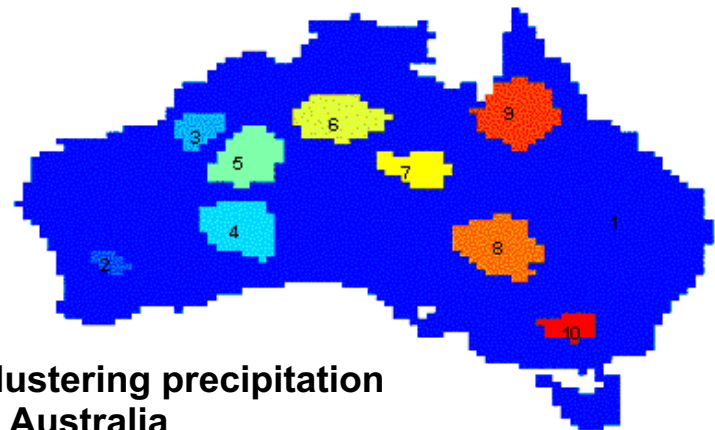


Clustering precipitation
in Australia



What is not Cluster Analysis?

- Supervised classification
 - Have class label information
- Simple segmentation
 - Dividing students into different registration groups alphabetically, by last name
- Results of a query
 - Groupings are a result of an external specification
- Graph partitioning
 - Some mutual relevance and synergy, but areas are not identical



Notion of a Cluster can be Ambiguous





How many clusters?




Six Clusters



Two Clusters




Four Clusters





Types of Clusterings

- A **clustering** is a set of clusters
- Important distinction between **hierarchical** and **partitional** sets of clusters
- Partitional Clustering
 - A division data objects into non-overlapping subsets (clusters) such that each data object is in exactly one subset
- Hierarchical clustering
 - A set of nested clusters organized as a hierarchical tree

Partitional Clustering

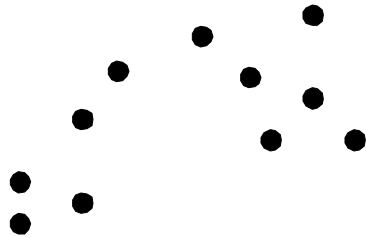


Original Points

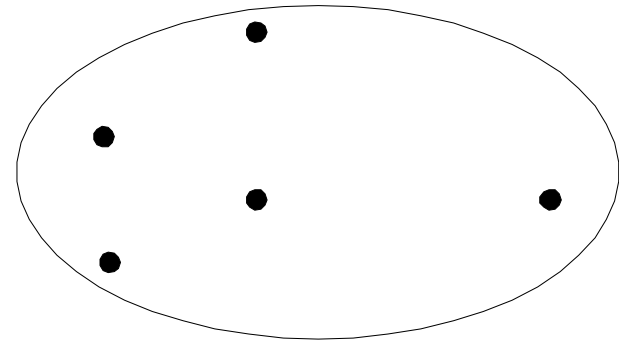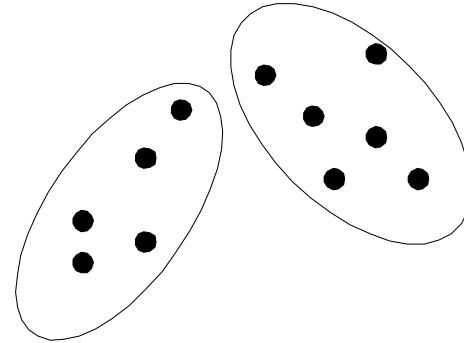


A Partitional Clustering


Hierarchical Clustering

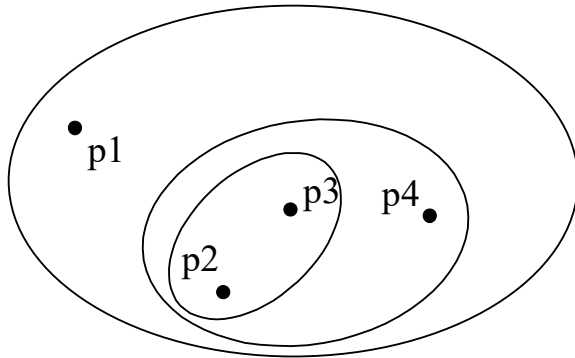


Traditional Hierarchical Clustering

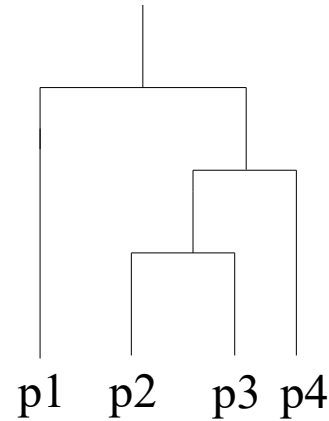

Traditional Dendrogram

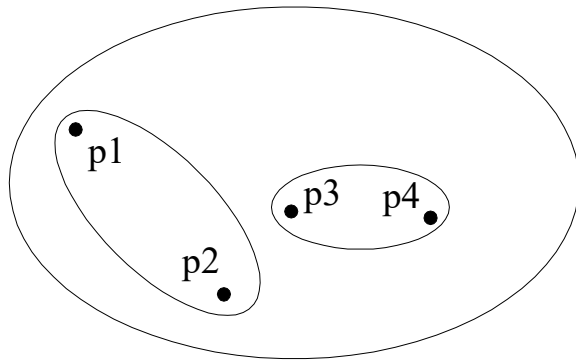

Non-traditional Hierarchical Clustering

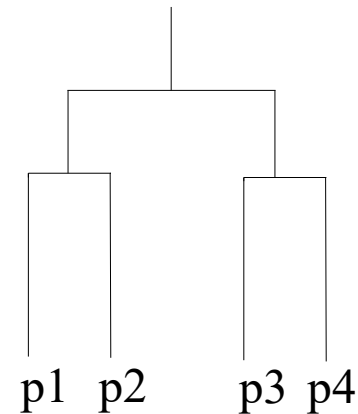

Non-traditional Dendrogram

Other Distinctions Between Sets of Clusters

- Exclusive versus non-exclusive

- In non-exclusive clusterings, points may belong to multiple clusters.
- Can represent multiple classes or ‘border’ points

- Fuzzy versus non-fuzzy

- In fuzzy clustering, a point belongs to every cluster with some weight between 0 and 1
- Weights must sum to 1
- Probabilistic clustering has similar characteristics

- Partial versus complete

- In some cases, we only want to cluster some of the data

- Heterogeneous versus homogeneous

- Cluster of widely different sizes, shapes, and densities


Types of Clusters

- Well-separated clusters
- Center-based clusters
- Contiguous clusters
- Density-based clusters
- Property or Conceptual
- Described by an Objective Function


Outline of Clustering Algorithms

- K-means and its variants
- Hierarchical clustering
- Density Clustering
- Measurements


Demo: K-means

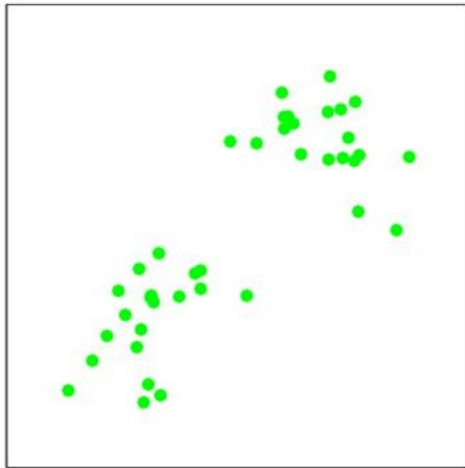


Data points

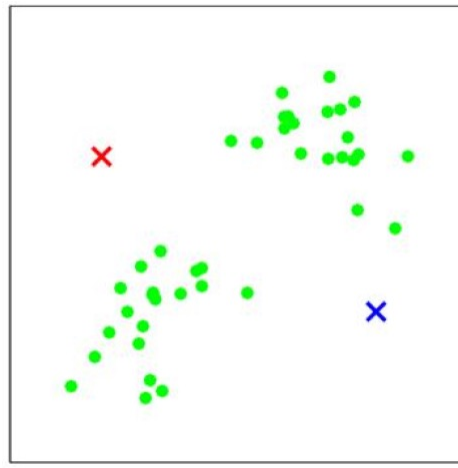


Initial centroids

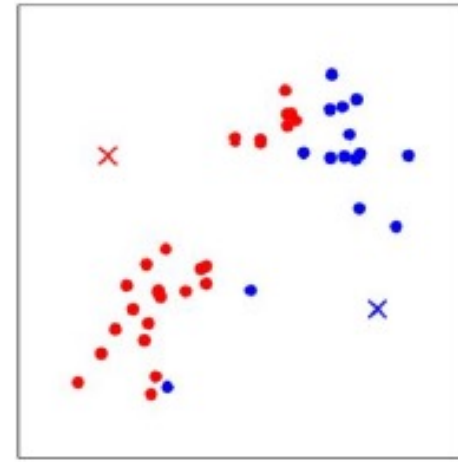


Assign points to two centroids

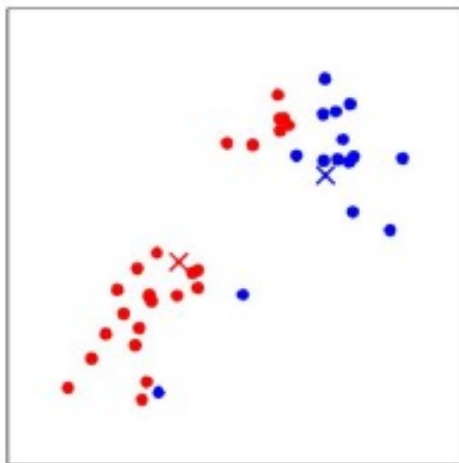

Calculate Centroids

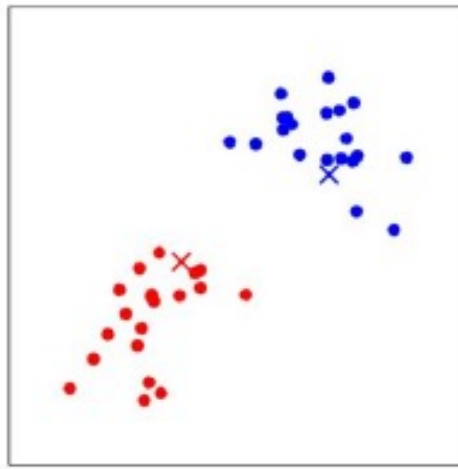

Assign points to two centroids

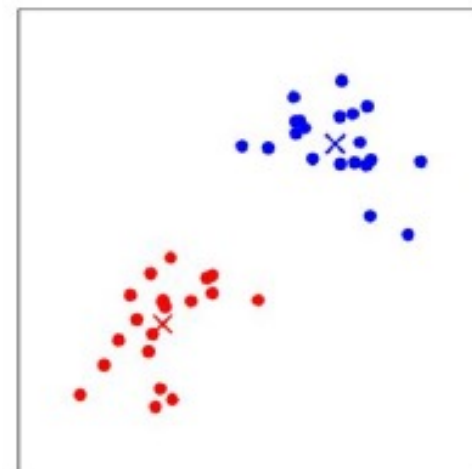

Calculate Centroids

K-means Clustering

- Partitional clustering approach
- Each cluster is associated with a **centroid** (center point)
- Each point is assigned to the cluster with the closest centroid
- Number of clusters, K , must be specified
- The basic algorithm is very simple

-
- 1: Select K points as the initial centroids.
 - 2: **repeat**
 - 3: Form K clusters by assigning all points to the closest centroid.
 - 4: Recompute the centroid of each cluster.
 - 5: **until** The centroids don't change
-



Quiz: K-means v.s. K-Nearest Neighbor

- Differences?
- Similarities?


K-means Clustering – Details

- Initial centroids are often chosen randomly.
 - Clusters produced vary from one run to another.
- The centroid is (typically) the mean of the points in the cluster.
- ‘Closeness’ is measured by Euclidean distance, cosine similarity, correlation, etc.
- K-means will converge for common similarity measures mentioned above.
- Most of the convergence happens in the first few iterations.
 - Often the stopping condition is changed to ‘Until relatively few points change clusters’
- Complexity is $O(n * K * I * d)$
 - n = number of points, K = number of clusters,
 I = number of iterations, d = number of attributes

Two different K-means Clusterings

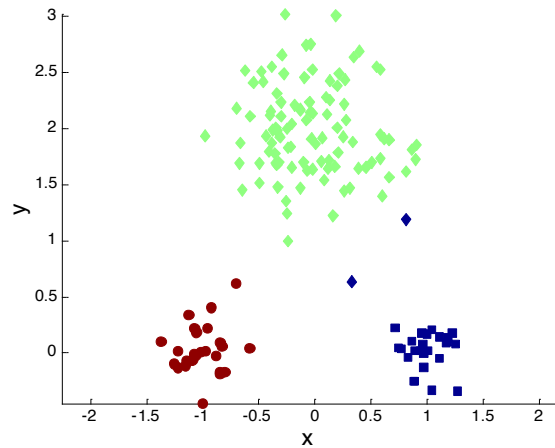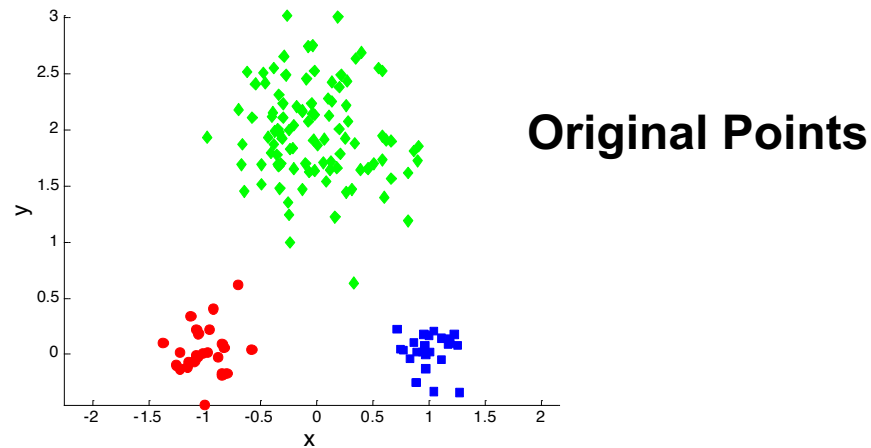


Optimal Clustering





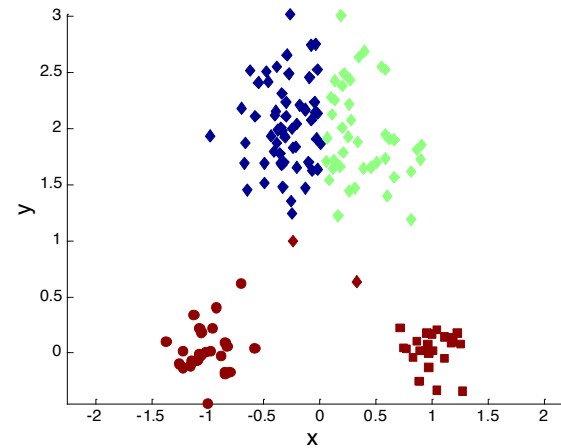


Sub-optimal Clustering

Importance of Choosing Initial Centroids

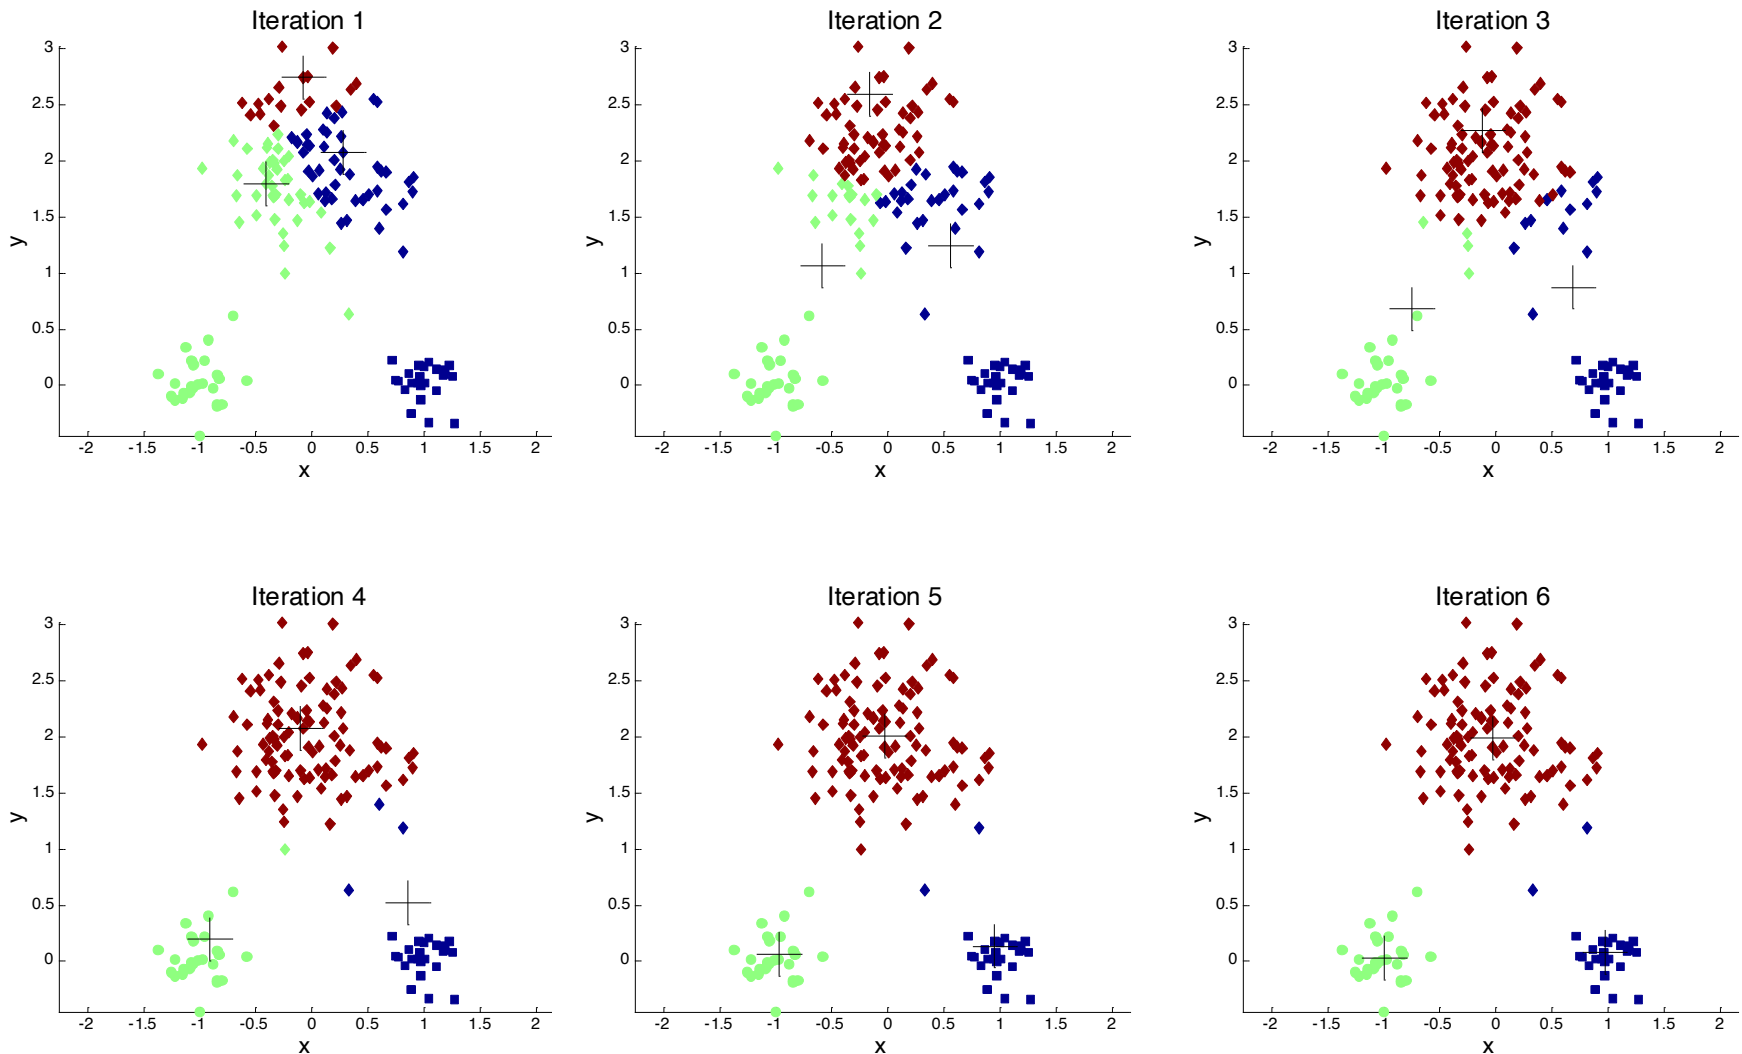

Importance of Choosing Initial Centroids ...

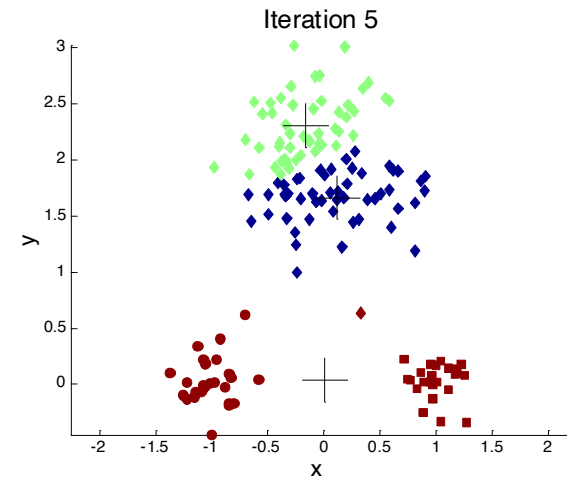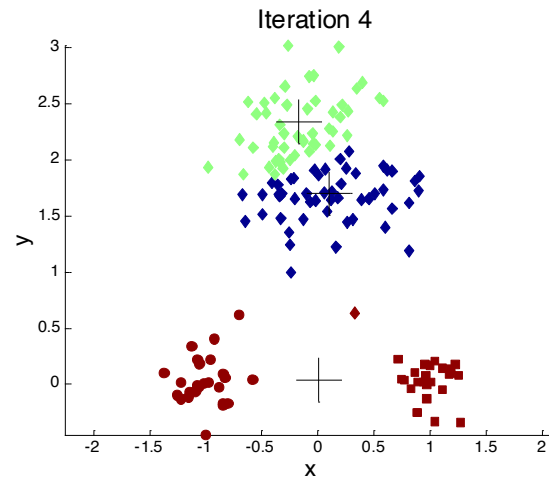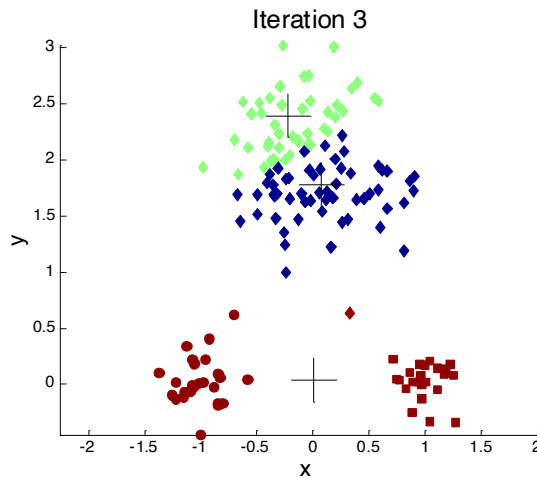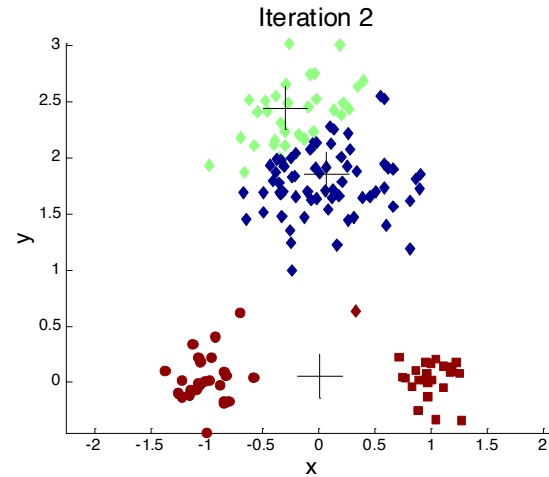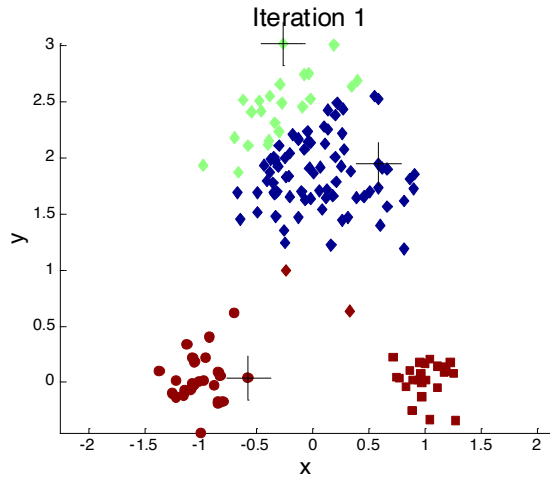

Evaluating K-means Clusters

- Most common measure is Sum of Squared Error (SSE)
 - For each point, the error is the distance to the nearest cluster
 - To get SSE, we square these errors and sum them.

$$SSE = \sum_{i=1}^K \sum_{x \in C_i} dist^2(m_i, x)$$

- x is a data point in cluster C_i and m_i is the representative point for cluster C_i
 - ◆ can show that m_i corresponds to the center (mean) of the cluster
- Given two clusters, we can choose the one with the smallest error
- One easy way to reduce SSE is to increase K , the number of clusters
 - ◆ A good clustering with smaller K can have a lower SSE than a poor clustering with higher K

Problems with Selecting Initial Points


- If there are K 'real' clusters then the chance of selecting one centroid from each cluster is small.
 - Chance is relatively small when K is large
 - If clusters are the same size, n , then

$$P = \frac{\text{number of ways to select one centroid from each cluster}}{\text{number of ways to select } K \text{ centroids}} = \frac{K!n^K}{(Kn)^K} = \frac{K!}{K^K}$$

- For example, if $K = 10$, then probability = $10!/10^{10} = 0.00036$
- Sometimes the initial centroids will readjust themselves in 'right' way, and sometimes they don't
- Consider an example of five pairs of clusters





10 Clusters Example

Iteration 4

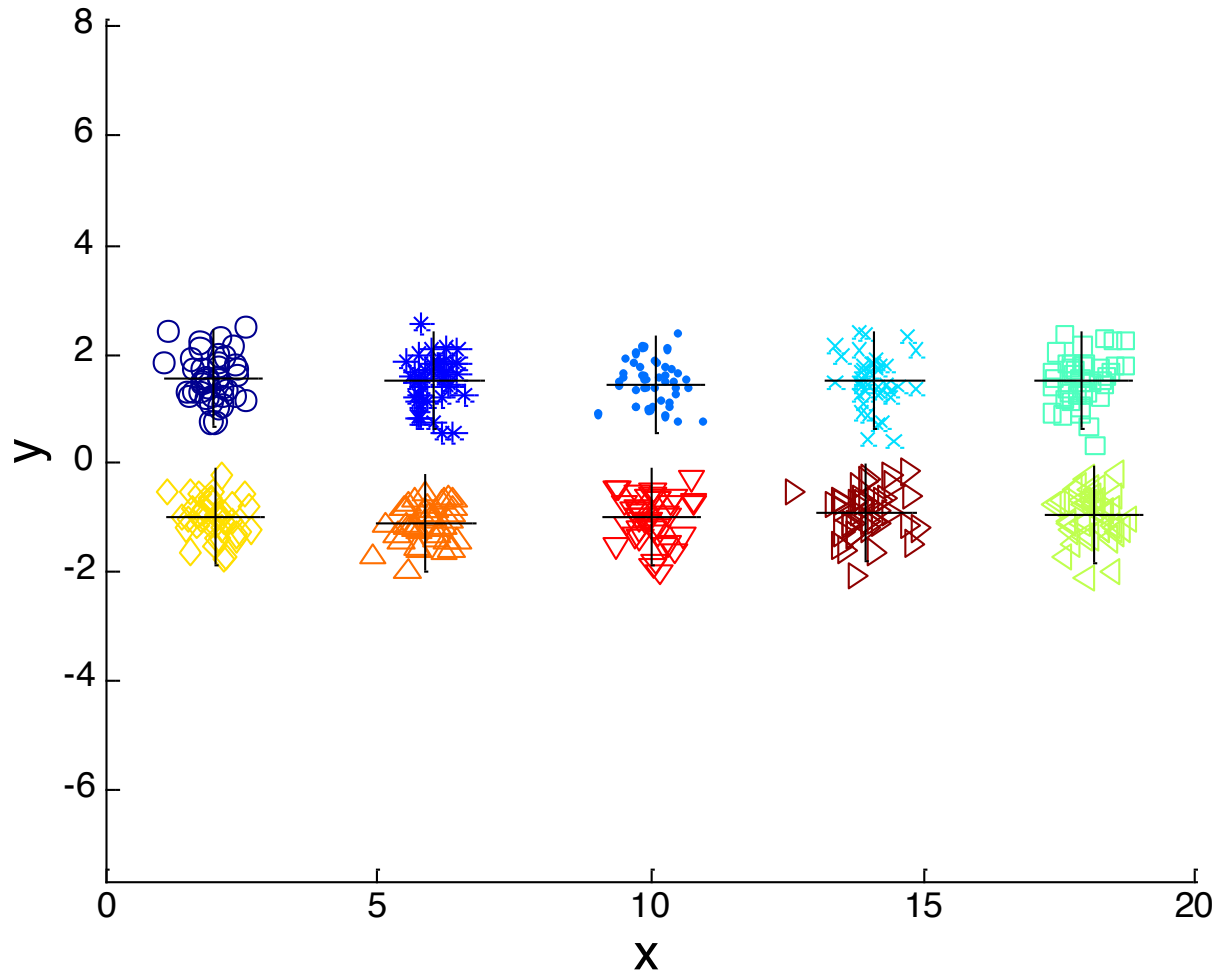

Starting with two initial centroids in one cluster of each pair of clusters

10 Clusters Example

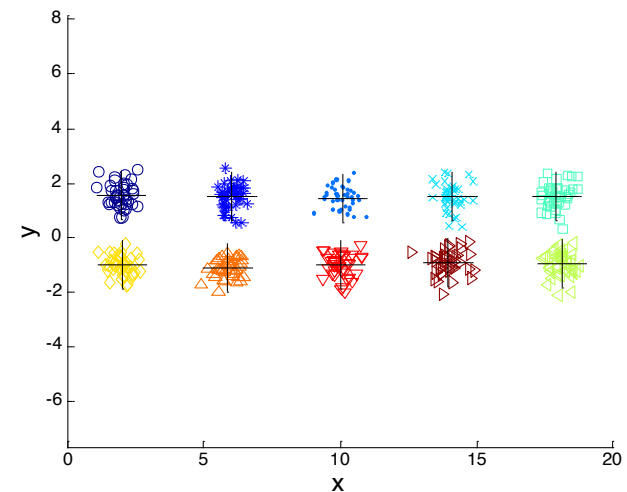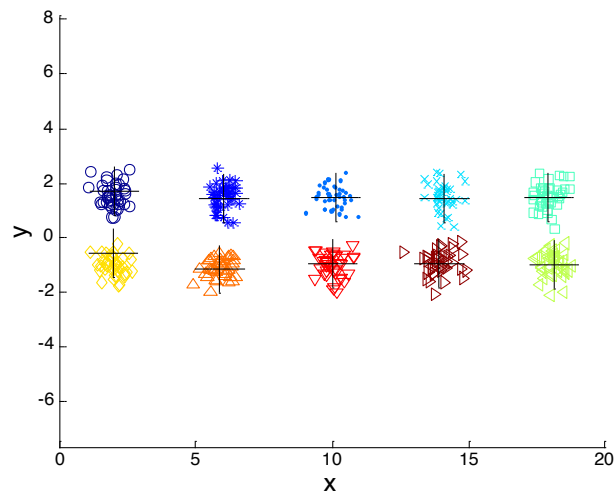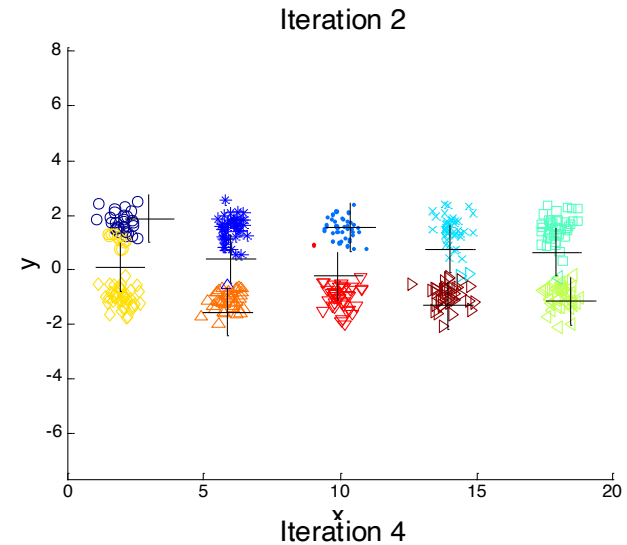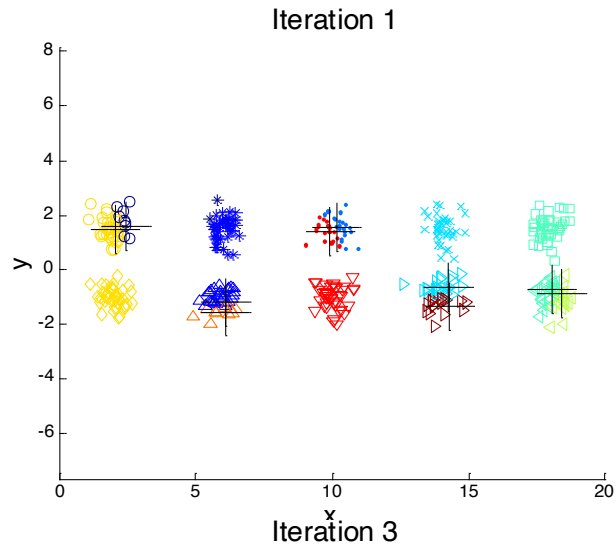

Starting with two initial centroids in one cluster of each pair of clusters

Solutions to Initial Centroids Problem

- Multiple runs
 - Helps, but probability is not on your side
- Sample and use hierarchical clustering to determine initial centroids
- Select more than k initial centroids and then select among these initial centroids
 - Select most widely separated
- Postprocessing
- Bisecting K-means
 - Not as susceptible to initialization issues

Handling Empty Clusters

- Basic K-means algorithm can yield empty clusters
- Several strategies
 - Choose the point that contributes most to SSE
 - Choose a point from the cluster with the highest SSE
 - If there are several empty clusters, the above can be repeated several times.

Updating Centers Incrementally

- In the basic K-means algorithm, centroids are updated after all points are assigned to a centroid
- An alternative is to update the centroids after each assignment (incremental approach)
 - Each assignment updates zero or two centroids
 - More expensive
 - Introduces an order dependency
 - Never get an empty cluster
 - Can use “weights” to change the impact

Pre-processing and Post-processing

- Pre-processing

- Normalize the data
- Eliminate outliers


- Post-processing

- Eliminate small clusters that may represent outliers
- Split 'loose' clusters, i.e., clusters with relatively high SSE
- Merge clusters that are 'close' and that have relatively low SSE
- Can use these steps during the clustering process
 - ◆ ISODATA


Limitations of K-means

- K-means has problems when clusters are of differing
 - Sizes
 - Densities
 - Non-globular shapes
- K-means has problems when the data contains outliers.

Limitations of K-means: Differing Sizes

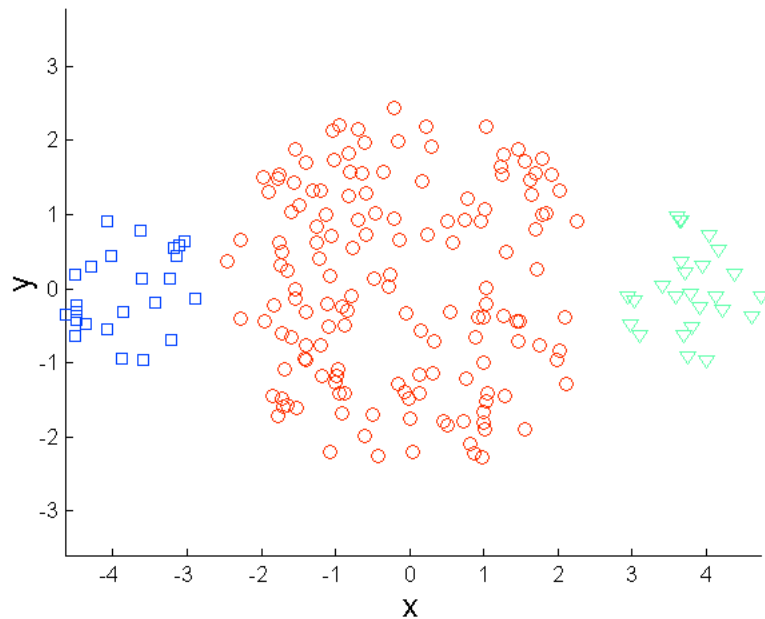


Original Points

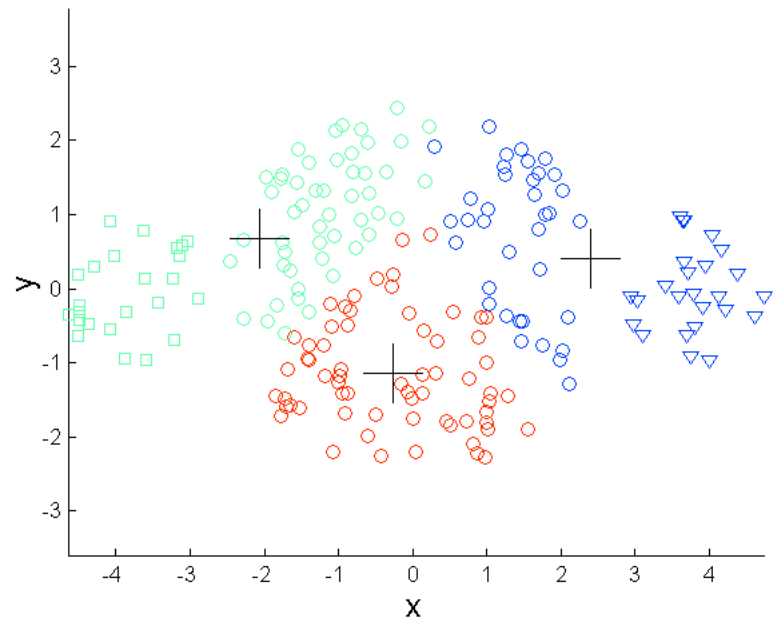


K-means (3 Clusters)

Limitations of K-means: Differing Density

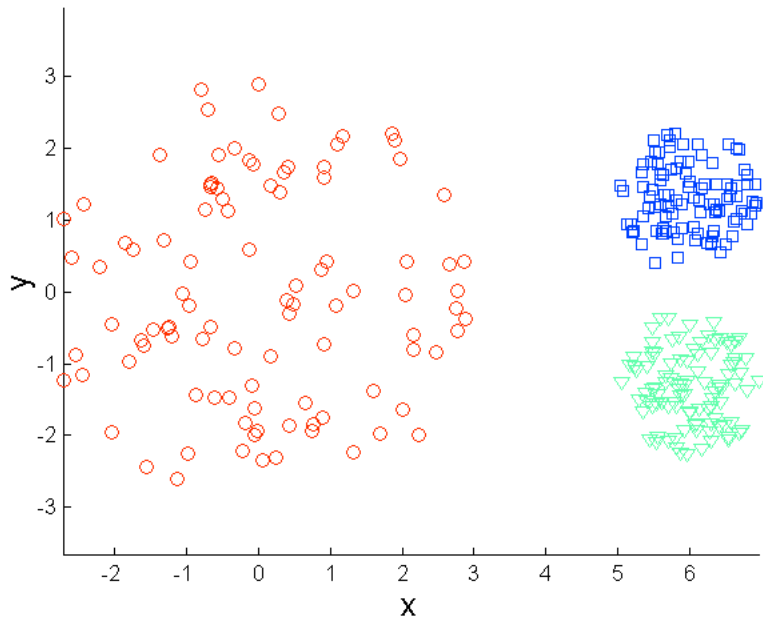


Original Points

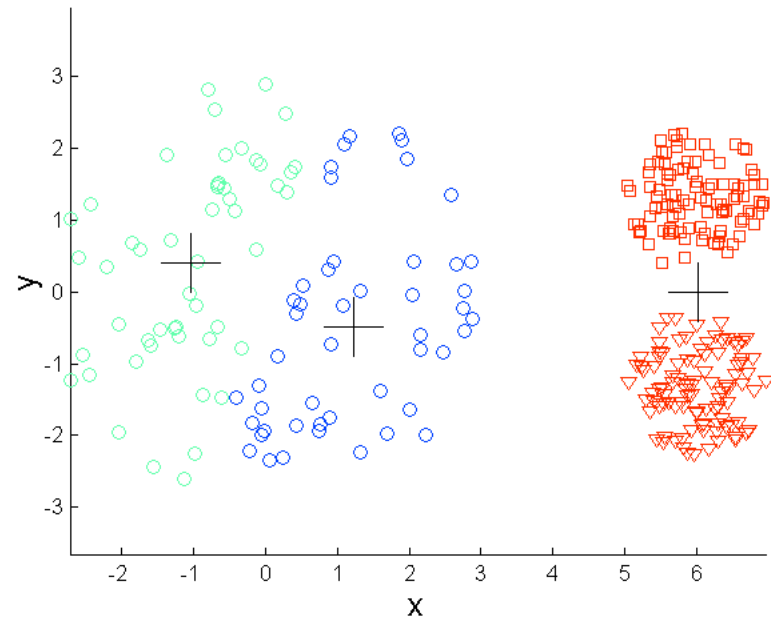


K-means (3 Clusters)

Limitations of K-means: Non-globular Shapes

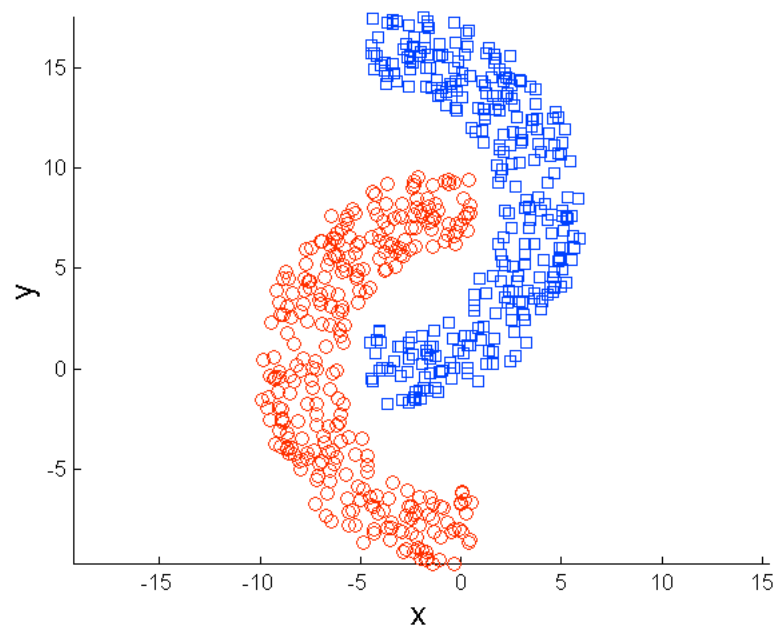


Original Points

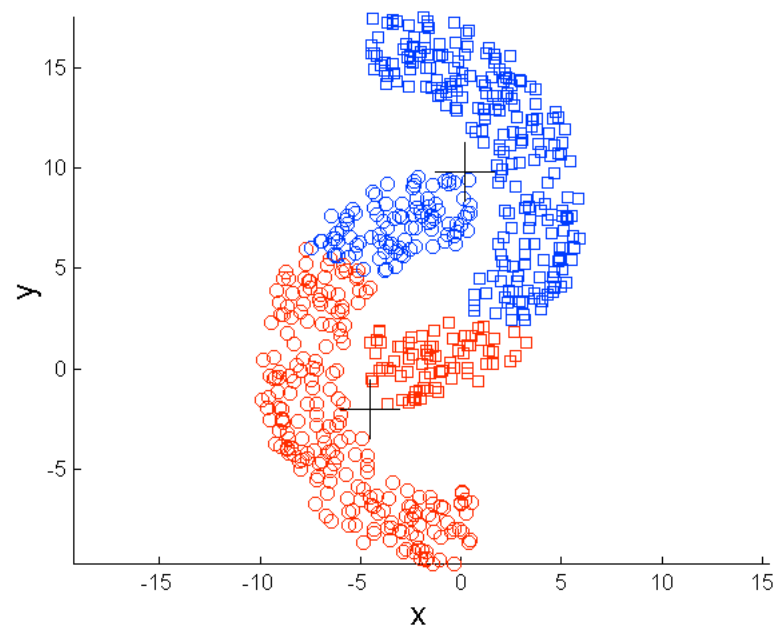


K-means (2 Clusters)

Overcoming K-means Limitations

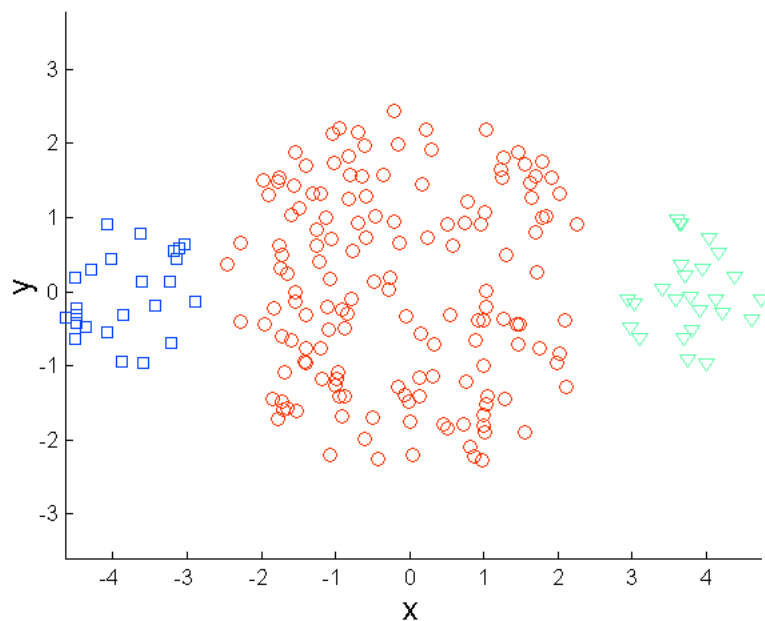


Original Points

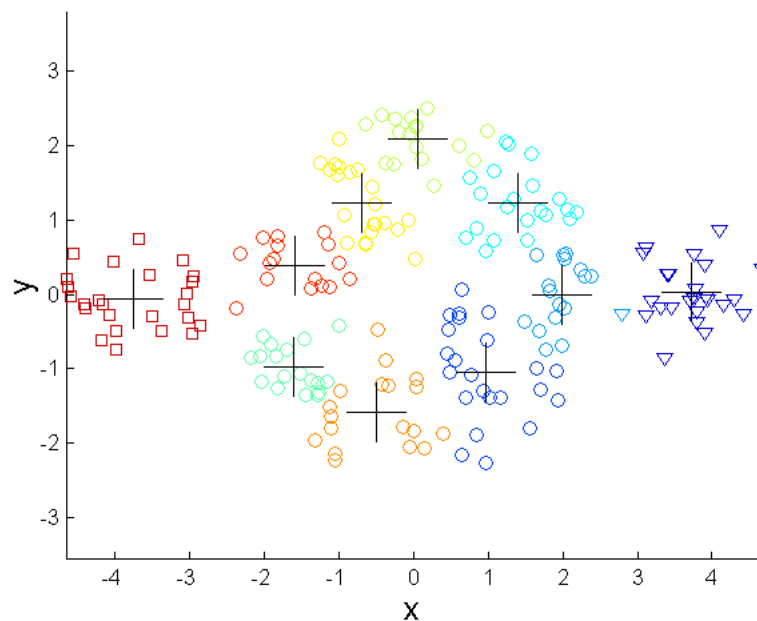


K-means Clusters

One solution is to use many clusters.
Find parts of clusters, but need to put together.

Overcoming K-means Limitations

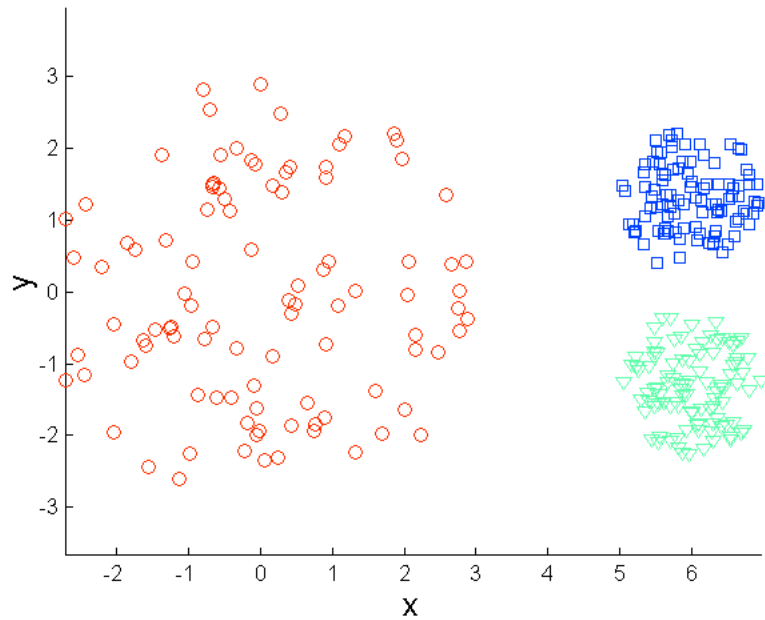


Original Points

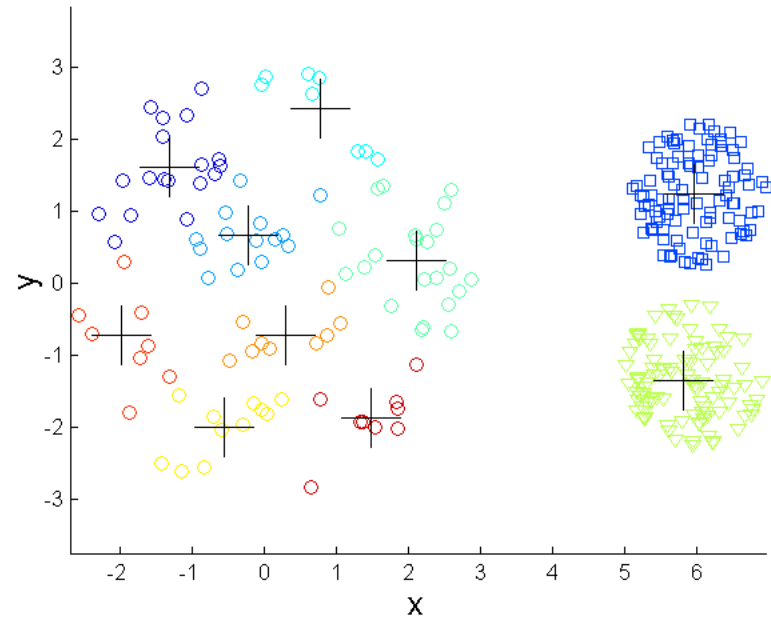


K-means Clusters

Overcoming K-means Limitations

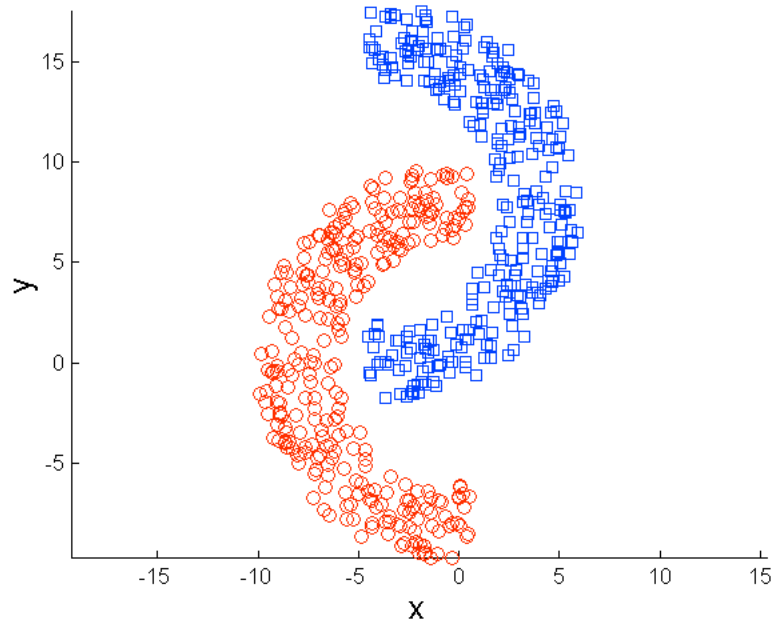

Original Points

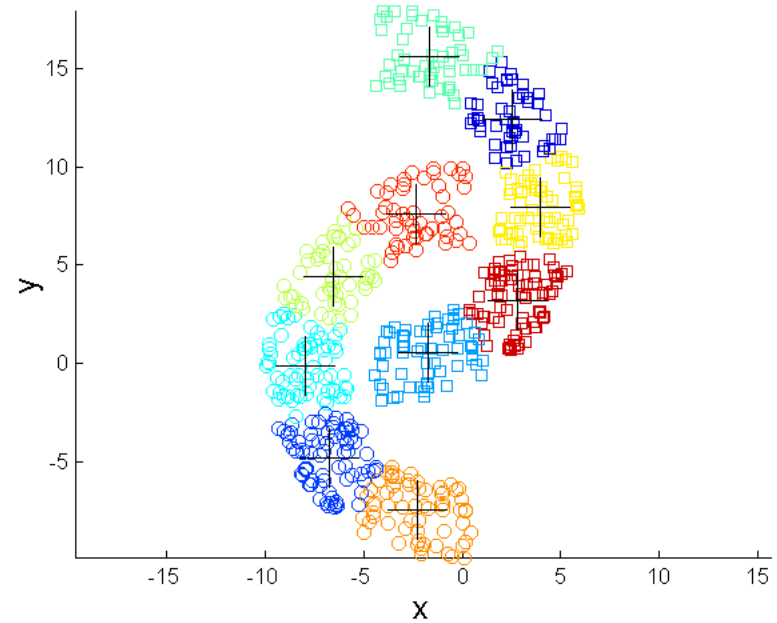



K-means Clusters

Outline of Clustering Algorithms

- K-means and its variants
- Hierarchical clustering
- Density Clustering
- Measurements

Hierarchical Clustering

- Produces a set of nested clusters organized as a hierarchical tree
- Can be visualized as a dendrogram
 - A tree like diagram that records the sequences of merges or splits

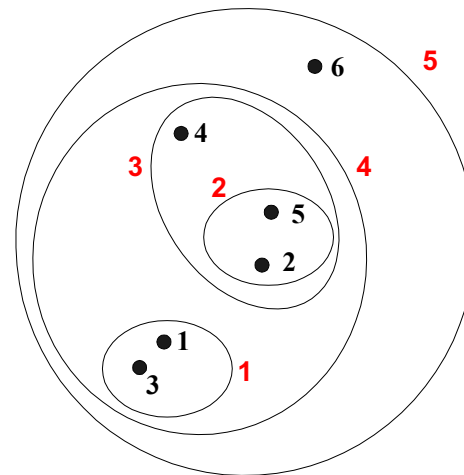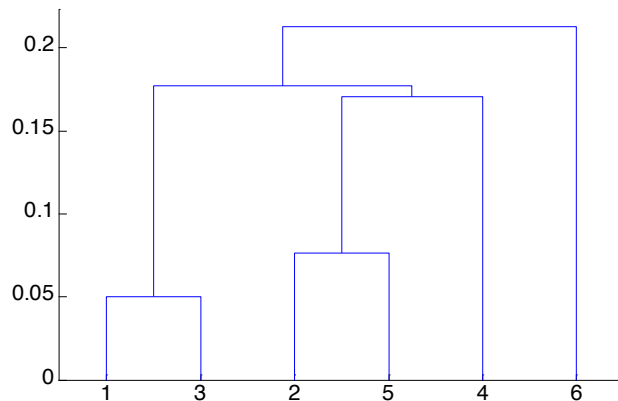

Strengths of Hierarchical Clustering

- Do not have to assume any particular number of clusters
 - Any desired number of clusters can be obtained by ‘cutting’ the dendrogram at the proper level
- They may correspond to meaningful taxonomies
 - Example in biological sciences (e.g., animal kingdom, phylogeny reconstruction, ...)

Hierarchical Clustering


- Two main types of hierarchical clustering
 - Agglomerative:
 - ◆ Start with the points as individual clusters
 - ◆ At each step, merge the closest pair of clusters until only one cluster (or k clusters) left
 - Divisive:
 - ◆ Start with one, all-inclusive cluster
 - ◆ At each step, split a cluster until each cluster contains a point (or there are k clusters)
- Traditional hierarchical algorithms use a similarity or distance matrix
 - Merge or split one cluster at a time

Agglomerative Clustering Algorithm

- More popular hierarchical clustering technique
- Basic algorithm is straightforward
 1. Compute the proximity matrix
 2. Let each data point be a cluster
 3. **Repeat**
 4. Merge the two closest clusters
 5. Update the proximity matrix
 6. **Until** only a single cluster remains
- Key operation is the computation of the proximity of two clusters
 - Different approaches to defining the distance between clusters distinguish the different algorithms

Starting Situation

- Start with clusters of individual points and a proximity matrix

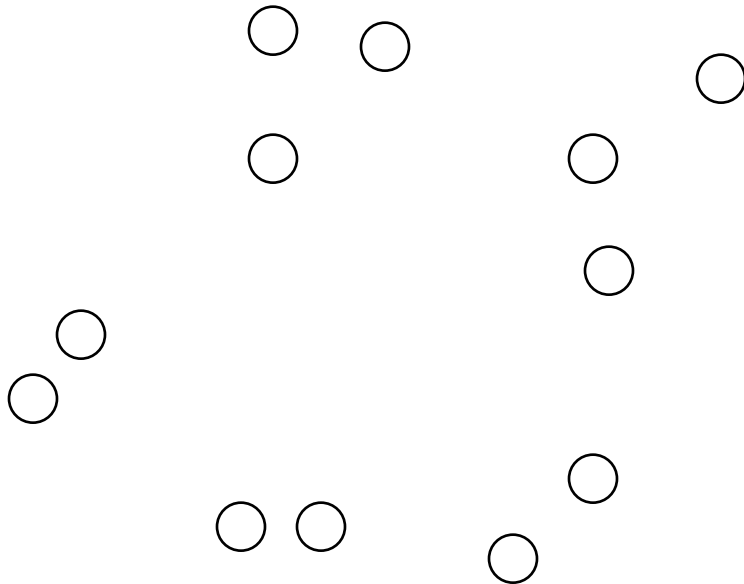

	p1	p2	p3	p4	p5	...
p1						
p2						
p3						
p4						
p5						
.						
.						
.						

Proximity Matrix

p1 p2 p3 p4 ... p9 p10 p11 p12

Intermediate Situation

- After some merging steps, we have some clusters

	C1	C2	C3	C4	C5
C1					
C2					
C3					
C4					
C5					

Proximity Matrix

