
Admission before execution — Algorithm 2, line 2

request	declares	check	
`run_metric`	`ER@r1`	current; required `item` filter present	✓ **runs in** s'
`run_sql`	`ER@r0`	r0 retired: join now needs `i_is_current='Y'`; use r1	✗
`run_sql`	none	no `i_is_current='Y'`: item 17 counted twice	✗

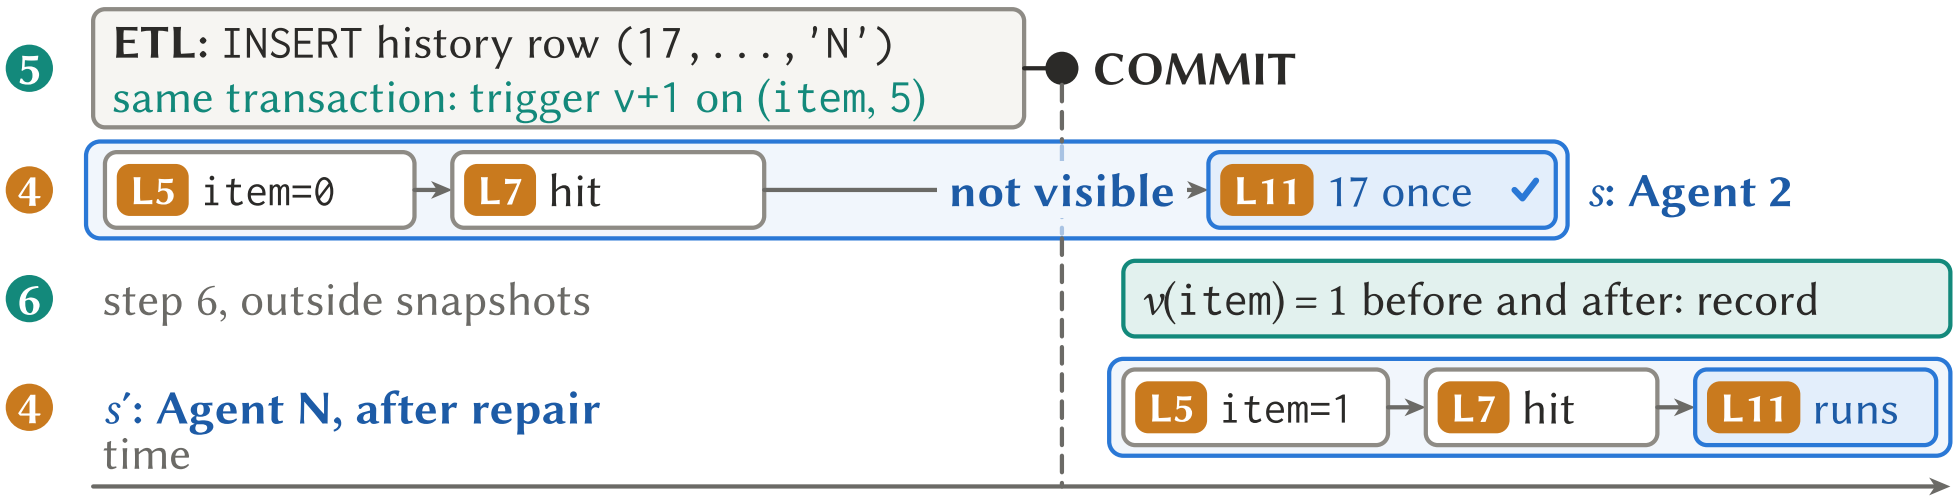

`mavra_versions`

table	shard	v
`date_dim`	0	0
`item`	0	0
`item`	5	0 → 1

$v_s(T) = \Sigma v$, 16 rows

Verdicts H_{tx} — key id(c) @ v_s(dep(c))

id(c) @ v_s	rows/keys		written → reused
`KeyUnique(item.i_item_sk)@item=0`	1000/1000	✓	publication → s
`KeyUnique(item.i_item_sk)@item=1`	1001/1000	✗	maintenance
`KeyUnique(item.i_item_sk, i_is_current='Y')@item=1`	1000/1000	✓	repair → s'